MITSUBISHI ELECTRIC

Changes for the Better

Automating the World

FACTORY AUTOMATION

PROGRAMMABLE CONTROLLERS

FX Family Catalog





High-End Model FX3U FX3UC







Standard Model FX3G FX3GC




Entry-Level Model FX3S

FX3 series

Push the limits of control.

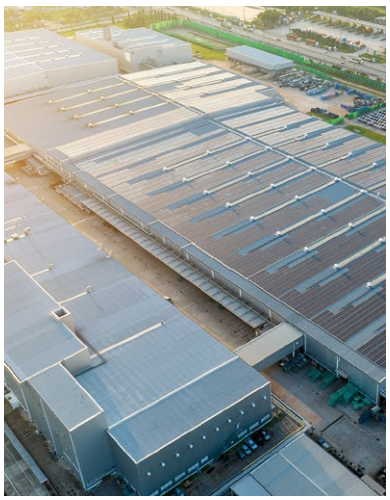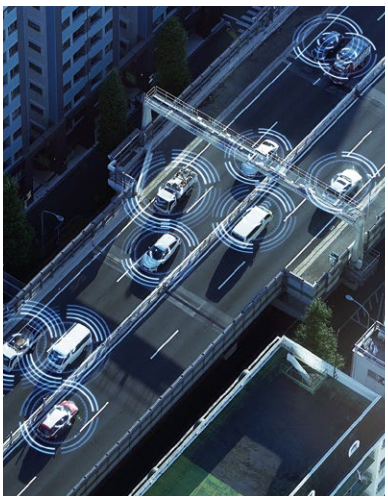

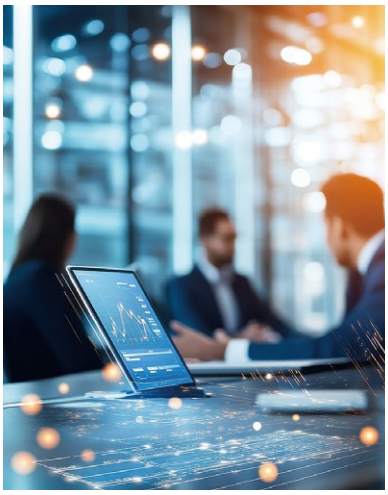


Mitsubishi Electric Corporation operates across a wide range of sectors, from home appliances and building systems to railway solutions, factory automation equipment, and satellites and leverages the synergy created by these diverse sectors to address various challenges and provide optimal solutions worldwide.

We, the Mitsubishi Electric Group, will continue to evolve in "carbon neutrality" and a "circular economy" by promoting innovation in products and services and providing integrated solutions through our business activities, all in order to realize a vibrant and sustainable society.

Under "Changes for the Better" which reflects the Mitsubishi Electric Group's commitment to "always strive to achieve something better", Mitsubishi Electric FA will expand the value of its products and services in the FA system business by advancing the provision and expansion of integrated solutions under the slogan "Automating the World" for an even better tomorrow. Through automation technology, we aim to contribute to innovation not only in the manufacturing industry but also across society as a whole.
We stand as your partner in shaping a smarter, more efficient, and more sustainable future.

SUSTAINABLE DEVELOPMENT GOALS

The Mitsubishi Electric Group is actively solving social issues, such as decarbonization and labor shortages, by providing production sites with energy-saving equipment and solutions that utilize automation systems, thereby helping towards a sustainable society.

OVERVIEW

Concept	4
FX Main Units Lineup	6
FX Control Solutions	12
Analog Control	14
High-Speed Control	15
Inverter Control	15
Positioning	16
Open Field Networks	18
Serial Communication	19
Information Exchange	20
Data Management	21
Visualization	22
Software	24
Technical Information Section	25

FX3 series



Push the limits of control.

The Mitsubishi Electric FX3 PLC Family continues to be successful as a provider of customizable compact control solutions allowing customers to choose the best model to fit their applications.

Ease of Use

Control systems that require minimal setup and keep program development time short.

Affordable

A high performance to cost ratio makes economical design solutions for a diverse range of applications a reality.
These features combined with Mitsubishi Electric´s legacy in quality and reliability ensure that the 3rd generation of micro controllers will continue to be at the forefront of the compact PLC market and provide customers with a leading edge.

Models

Entry-Level Model



FX3S

Simple and cost effective. Basic model that supports analog and communication expansion. Perfect for simple automation tasks.

Standard Model





FX3G FX3GC

From automation to network, to more advanced control.
Supports features required for basic control and a variety of applications.

Function	Controllable I/O: 10 - 30 points	Controllable I/O: 14 - 128 points(Max. 256 with CC-Link remote I/O)



Flexible

A configurable design that permits open communication, large I/O handling, as well as precise positioning and analog control, creating systems that adapt to customer requirements.

Customer Confidence

With a design philosophy spanning more than a quarter century, a customer base spread across the globe, a host of industrial certifications and almost 10 million CPUs sold, the FX3 series continues to sustain its position as the compact PLC of choice.

HIgh-End Model



FX3U



FX3UC

Superior speed, power, and flexibility.
Realize high speed control, network support, data logging, and more.


Controllable I/O: 16 - 256 points(Max. 384 with CC-Link remote I/O)

FX Main Units Lineup




FX 3U

Controllable I/O: 16 - 256 points
Max. 384 with CC-Link or AnyWireASLINK remote I/O
(Main Unit I/O: 16/32/48/64/80/128 points)

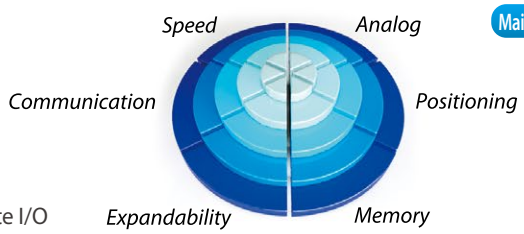

Main unit production discontinuation Sep. 2028

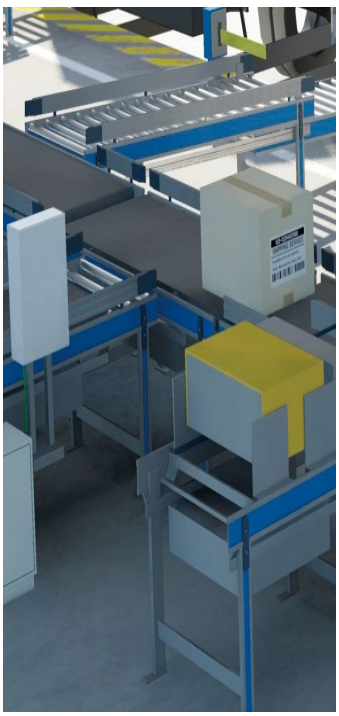

Top of the Line

The FX3U is the original dual system-bus, high-speed, fully expandable compact PLC designed to seamlessly control communication, networking, analog, and positioning systems. With a maximum of 384 controllable local and networked I/O via CC-Link, the FX3U uses its power and flexibility to provide a solution for a variety of applications.

- 3rd generation compact PLC
- High efficiency with more speed, performance, memory, and new functions
- Built-in high speed processing and positioning
- The FX3U can control a maximum of 256 connected I/O, and up to 384 points with CC-Link or AnyWireASLINK remote I/O.

Product Details

All-in-one CPU, power supply and I/O includes high expandability using Expansion Boards and Special Adapters to add functionality.

Fast Instruction Times

Basic Instructions: 0.065 µs / instruction (Contact Instruction)
Applied Instructions: 0.642 µs / instruction (MOV Instruction)

Large Memory

64,000 steps of built-in program memory.
Flash Memory Cassettes with loader function are available.

Applicable Standards


All products support EN and UL/cUL standards.
Various shipping approvals are supported as well.

Large Device Memory

Auxiliary Relays	7,680 points
Timers	512 points
Counters	235 points
Data Registers	8,000 points
Extension Registers	32,768 points
Extension File Registers (with optional Memory Cassette)	32,768 points



Main unit production discontinuation **Sep. 2028**

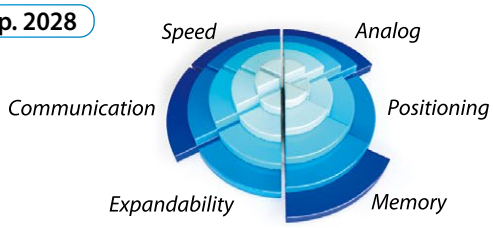

FX3UC

Controllable I/O: 16 - 256 points
Max. 384 with CC-Link or AnyWireASLINK remote I/O
(Main Unit I/O: 16/32/64/96 points)

Slim Fit

The FX3UC is the ultra-compact high speed, fully expandable PLC. Based on 24 V DC power and using connector-type transistor I/O, the FX3UC is designed for space conscious and modular applications. Created inline with the FX3U series, the FX3UC incorporates such attributes as built-in high speed I/O and the dual system-bus architecture, optimizing communication, networking, analog, and positioning control.

- 3rd generation super-compact PLC
- Reduced size and wiring using connector-type I/O
- Built-in high speed processing and positioning
- Even with its ultra-compact size, the FX3UC can be expanded to locally control up to 256 I/O, and up to 384 points with CC-Link or AnyWireASLINK remote I/O.

Product Details

Ultra-compact size main unit, power supply and I/O. Same programming specification as the FX3U products in an ultra compact housing with connector type wiring for fast and fault free wiring.

Fast Instruction Times

Basic Instructions: 0.065 µs / instruction (Contact Instruction)
Applied Instructions: 0.642 µs / instruction (MOV Instruction)

Large Memory

64,000 steps of built-in program memory.
Flash Memory Cassettes with loader function are available.

Applicable Standards

All products support EN and UL/cUL standards.
Various shipping approvals are supported as well.

Large Device Memory

Auxiliary Relays	7,680 points
Timers	512 points
Counters	235 points
Data Registers	8,000 points
Extension Registers	32,768 points
Extension File Registers (with optional Memory Cassette)	32,768 points




FX Main Units Lineup




FX3G

Controllable I/O: 14 - 128 points
Max. 256 with CC-Link or AnyWireASLINK remote I/O
(Main Unit I/O: 14/24/40/60 points)

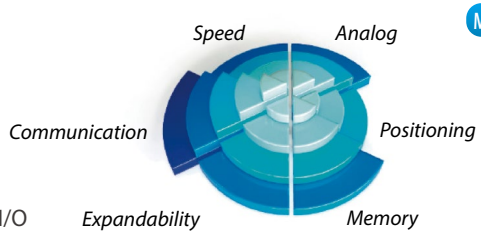

Main unit production discontinuation Dec. 2026

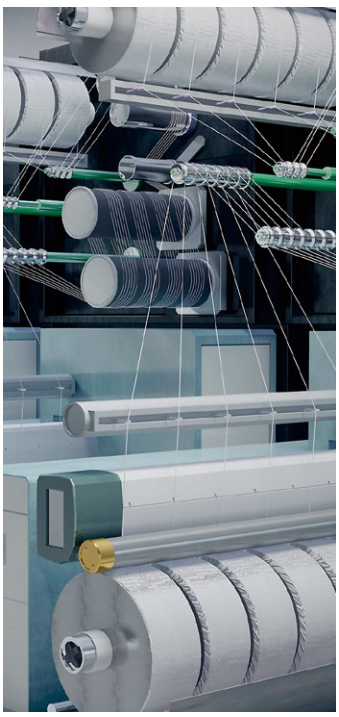

Customized Control

The FX3G is an introductory compact PLC designed for simple yet performance-critical applications. Incorporating innovative FX3 series technology the customer is presented with a suite of benefits.

- 3rd generation compact PLC
- Highly flexible
- Dual system-bus architecture
- The FX3G can control a maximum of 128 connected I/O, and up to 256 points with CC-Link or AnyWireASLINK remote I/O.

*: The standard mode is selected when the program capacity is set to 16000 steps or less using a parameter. The extension mode is selected when the program capacity is set to 16001 steps or more using a parameter.

Product Details

All-in-one CPU, power supply and I/O includes usage of the FX3 series ADP bus system and expansion boards (BD).

Instruction Times

Basic Instructions:
Standard mode*: 0.21 µs/instruction (Contact Instruction)
Extension mode*: 0.42 µs/instruction (Contact Instruction)
Applied Instructions:
Standard mode*: 0.52 µs/instruction (MOV Instruction)
Extension mode*: 1.29 µs/instruction (MOV Instruction)

Large Memory

32,000 steps of built-in program memory.
EEPROM memory cassette with loader function is available.

Applicable Standards


All products support EN and UL/cUL standards.
Various shipping approvals are supported as well.

Large Device Memory

Auxiliary Relays	7,680 points
Timers	320 points
Counters	235 points
Data Registers	8,000 points
Extension Registers	24,000 points
Extension File Registers	24,000 points



Main unit production discontinuation **Dec. 2026**

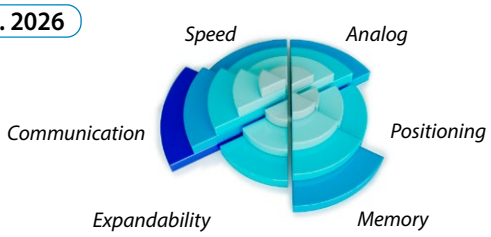

FX3GC

Controllable I/O: 32 - 128 points
Max. 256 with CC-Link or AnyWireASLINK remote I/O
(Main Unit I/O: 32 points)

Super Compact Control

The FX3GC expands the FX3 series line up with the connector type PLC entry model. Having the same processing capability as the highly successful FX3G, this super compact product reduces installation space, wiring time and potential wiring faults.

- 3rd generation super-compact PLC
- Reduced size and wiring using connector-type I/O
- Dual system-bus architecture
- Control of up to 128 directly connected I/O, or up to 256 I/O with CC-Link or AnyWireASLINK remote I/O.

*: The standard mode is selected when the program capacity is set to 16000 steps or less using a parameter. The extension mode is selected when the program capacity is set to 16001 steps or more using a parameter.

Product Details

All-in-one CPU, power supply and I/O.
Same programming specification as the FX3G products in an ultra compact housing with connector type wiring for fast and fault free wiring.

Instruction Times

Basic Instructions:
Standard mode*: 0.21 µs/instruction (Contact Instruction)
Extension mode*: 0.42 µs/instruction (Contact Instruction)
Applied Instructions:
Standard mode*: 0.52 µs/instruction (MOV Instruction)
Extension mode*: 1.29 µs/instruction (MOV Instruction)

Large Memory

32,000 steps of built-in program memory.

Applicable Standards

All products support EN and UL/cUL standards.
Various shipping approvals are supported as well.

Large Device Memory

Auxiliary Relays	7,680 points
Timers	320 points
Counters	235 points
Data Registers	8,000 points
Extension Registers	24,000 points
Extension File Registers	24,000 points




FX Main Units Lineup




FX3GE

Main unit production discontinuation Sep. 2025

Controllable I/O: 24 - 128 points
Max. 256 with CC-Link or AnyWireASLINK remote I/O
(Main Unit I/O: 24/40 points)

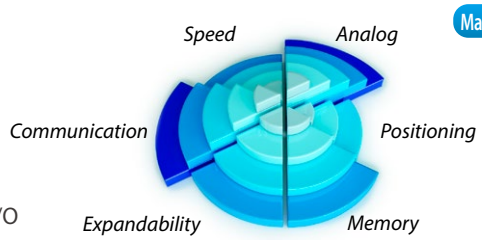

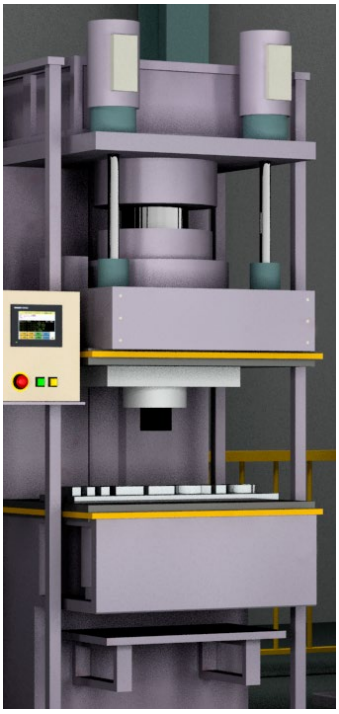

Keep it simple

FX3GE adds built-in analog input/output and Ethernet connectivity on top of FX3G performance.
A great fit for many applications.

- 3rd generation, all-in-one PLC
- Highly flexible
- Dual system-bus architecture
- Control of up to 128 directly connected I/O, or up to 256 I/O with CC-Link or AnyWireASLINK remote I/O.

*: The standard mode is selected when the program capacity is set to 16000 steps or less using a parameter. The extension mode is selected when the program capacity is set to 16001 steps or more using a parameter.

Product Details

All-in-one CPU, power supply and I/O, with integrated analog I/O and Ethernet port ready to use straight out of the box.

Instruction Times

Basic Instructions:
Standard mode*: 0.21 µs/instruction (Contact Instruction)
Extension mode*: 0.42 µs/instruction (Contact Instruction)
Applied Instructions:
Standard mode*: 0.52 µs/instruction (MOV Instruction)
Extension mode*: 1.29 µs/instruction (MOV Instruction)

Large Memory

32,000 steps of built-in program memory.
EEPROM memory cassette with loader function is available.


Applicable Standards

All products support EN and UL/cUL standards.

Large Device Memory

Auxiliary Relays	7,680 points
Timers	320 points
Counters	235 points
Data Registers	8,000 points
Extension Registers	24,000 points
Extension File Registers	24,000 points



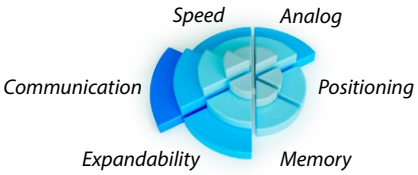

FX3S

Controllable I/O: 10 - 30 points
(Main Unit I/O: 10/14/20/30 points)

Keep it simple

The FX3S is the fit-and-forget PLC solution for space and cost conscious applications requiring up to 30 I/O. This minimum-expandability, battery-less maintenancefree controller is perfect for handling straightforward processes and can be hidden away in locations without regular maintenance activities.

- Basic controller for general applications
- High performance with minimal size

Product Details

All-in-one CPU, power supply and I/O. Expansion options includes adapter and expansion boards for communication, analog control, or temperature input.

Instruction Times

Basic Instructions: 0.21 µs/ instruction (Contact Instruction)
Applied Instructions: 0.5 µs to several hundred µs/ instruction

Large Memory


4,000 steps of built-in program memory.
No battery. No maintenance.

Applicable Standards

All products support EN and UL/cUL standards.
Various shipping approvals are supported as well.


Large Device Memory

Auxiliary Relays	1,536 points
Timers	138 points
Counters	67 points
Data Registers	3,000 points
File Registers	2,000 points

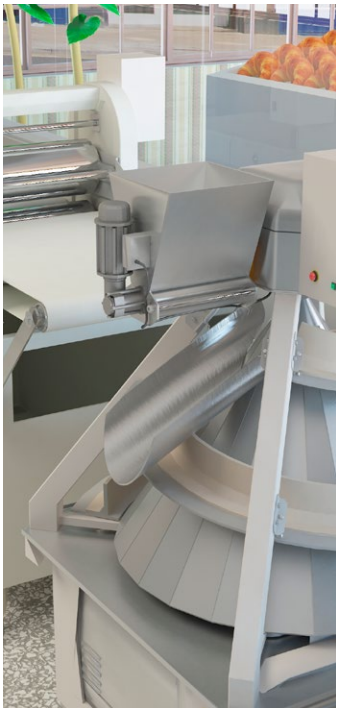


FX Control Solutions

With superior built-in functionality and straightforward usability, the FX series meets the needs of a variety of user applications. Using the factory image below as an example, key attributes that form the basis of automation control are demonstrated by the FX control system.

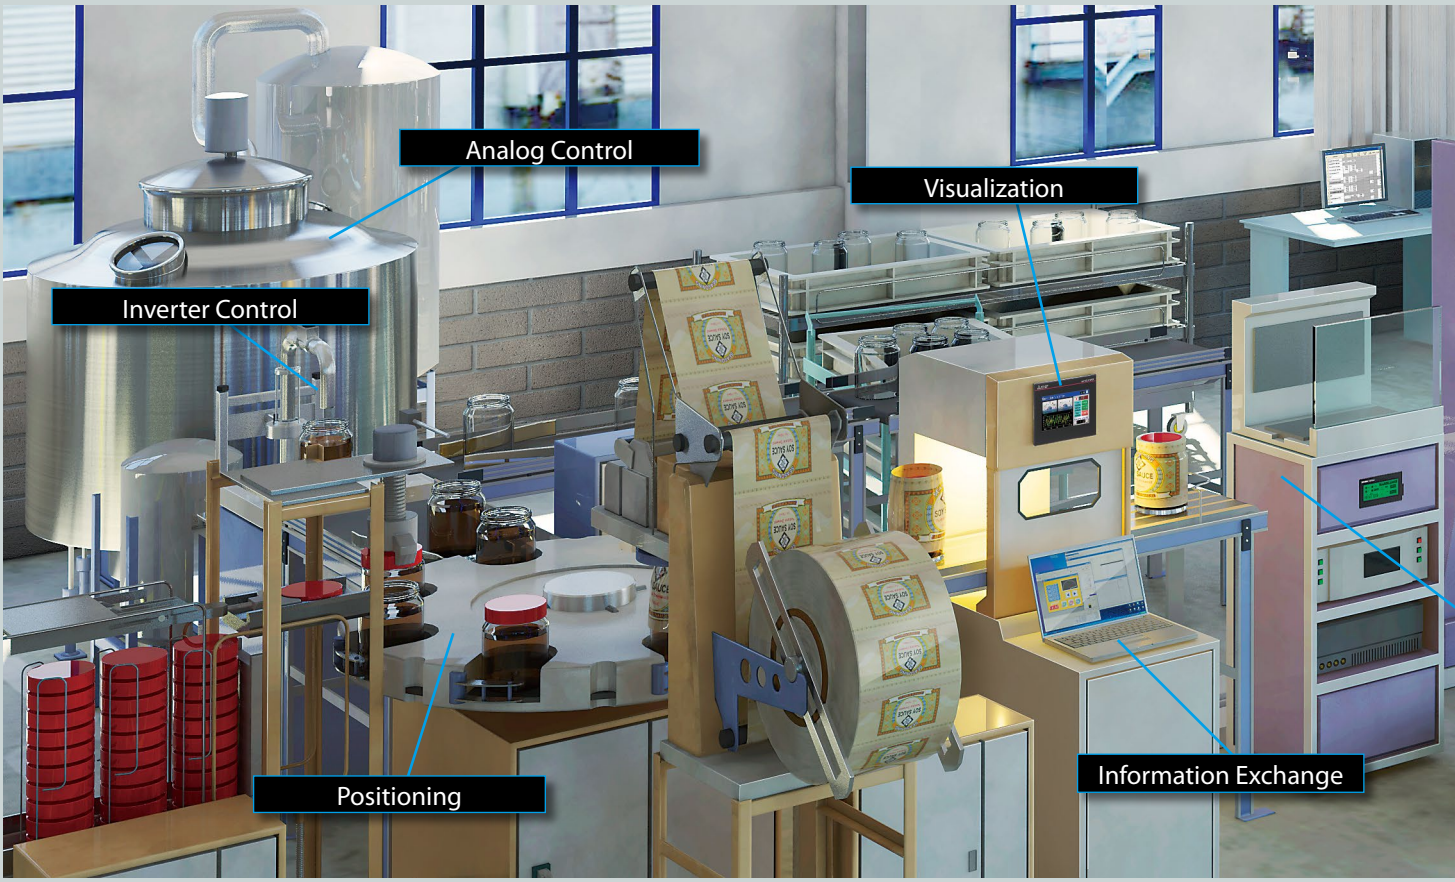

Analog Control



The FX series features easy Analog to Digital and Digital to Analog conversion for all models using Expansion Boards, Special Adapters, or Special Function Blocks.
For more information, go to Page 14.


High-Speed Control



Integrated High-Speed Counters


With 6 to 8 high speed counters on each model, the FX series is perfectly suited for applications in need of pulse-catch functions, closed-loop feedback processing, or high-speed sensor use.
For more information, go to Page 15.

Serial Communication




From PCs, printers, barcode readers, modems, and other PLCs, serial communication increases the flexibility of the FX series system to allow reliable data exchange over a variety of connections.
For more information, go to Page 19.

Information Exchange



Information can be sent to a higher level PC that constantly monitors production, raising the reliability and overall efficiency of the system.
For more information, go to Page 20.

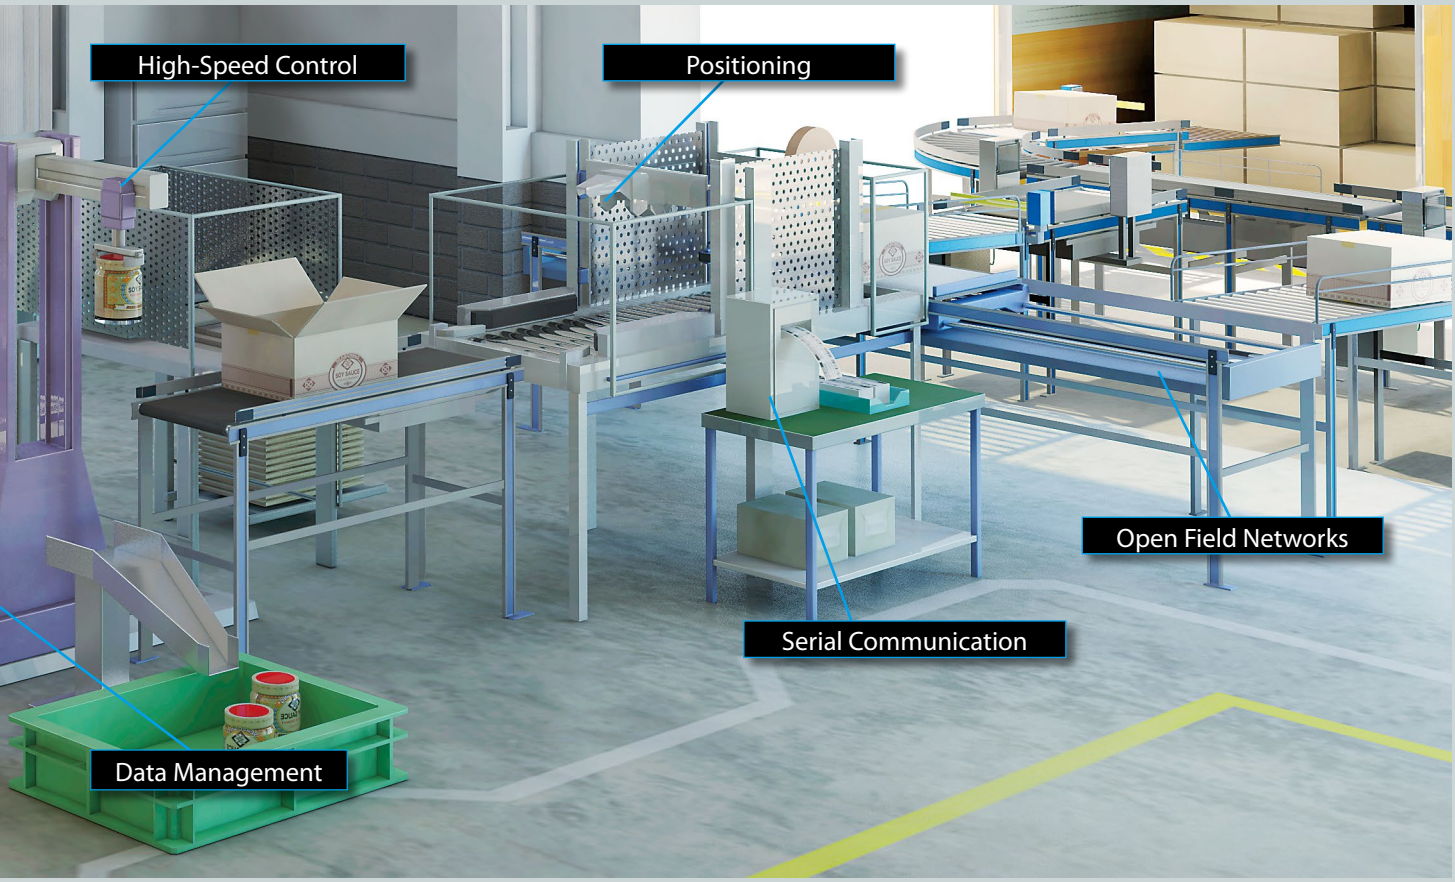

Inverter Control




Integrated FREQROL Protocol
FX series PLCs contain the RS-485 communication protocol and special instructions that allow control of all Mitsubishi Electric FREQROL Inverters. For all other models, Analog inverter control can be used.
For more information, go to Page 15.

Positioning



Built-in high-speed pulse outputs and special instructions enable the FX series main units to control up to 3 independent axes of servo motion from the main unit itself. With special function blocks, interpolated and networked servo control solutions are also available.
For more information, go to Page 16-17.

Open Field Networks



Among the networks supported by the FX series are CC-Link and Ethernet, MODBUS®, and PROFIBUS, providing both a wide selection for new solutions and an interface into existing networks.
For more information, go to Page 18.

Data Management



FX3U(C) enables data collection using logging instructions. Logging data can be easily stored in the basic unit and memory cassette. For more information, go to Page 21.

Visualization




HMI options for the FX series range from simple text-based Display Units to advanced graphical touch-screen displays, known as the GOT2000 series Graphic Operation Terminals. GOT2000 models start at 3.8" and go up to 15".
For more information, go to Page 22-23.

Analog Control


Expanding the FX PLC with analog inputs and outputs is required when the system needs to handle voltage or current inputs/outputs, temperature inputs, or temperature or PID control. The following expansion boards, special adapters, and special function blocks support different ranges and combinations of these features.




Analog Output

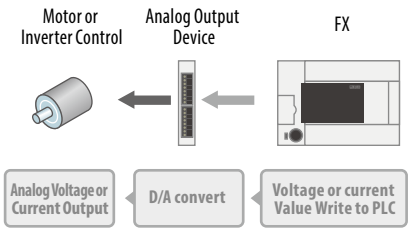


Analog Input

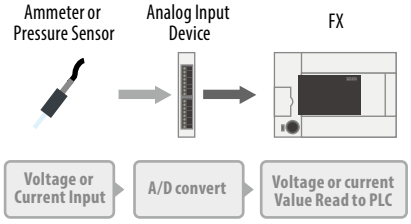


Temperature Input

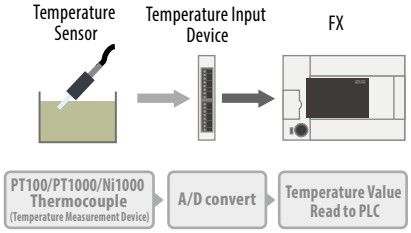

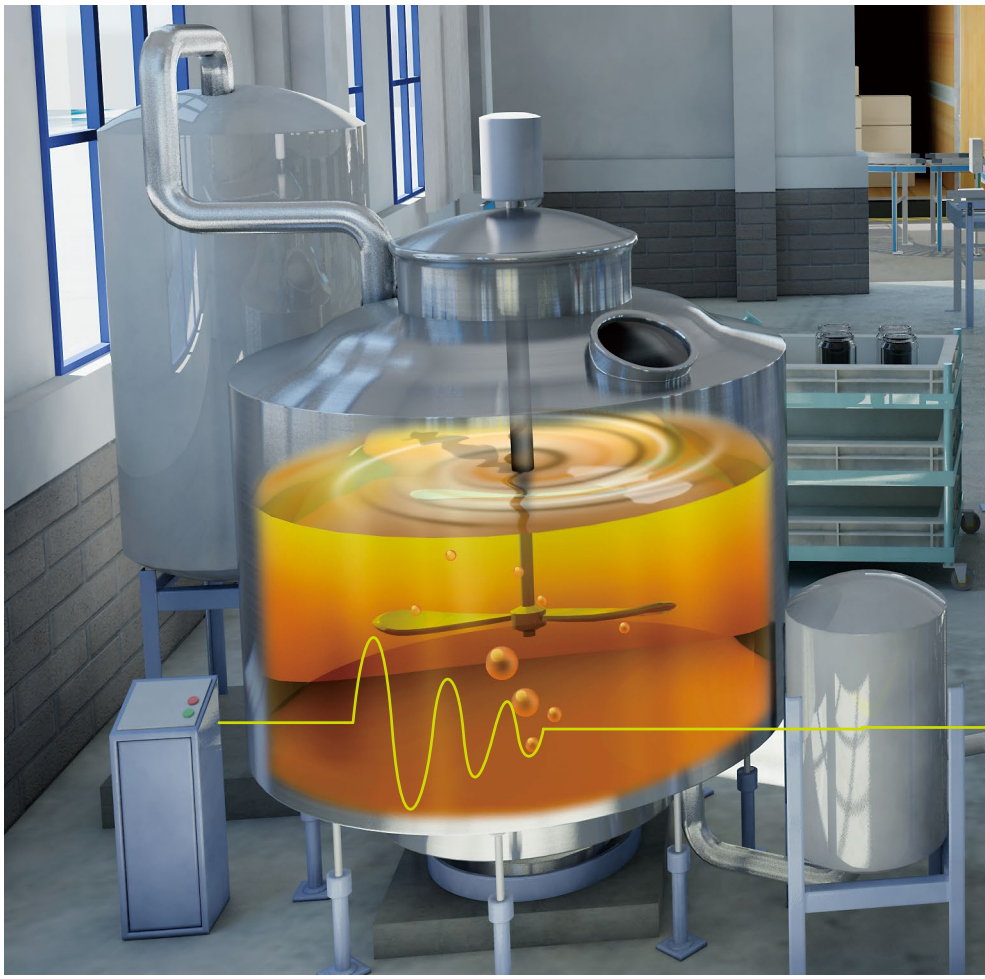

Analog Modules Lineup

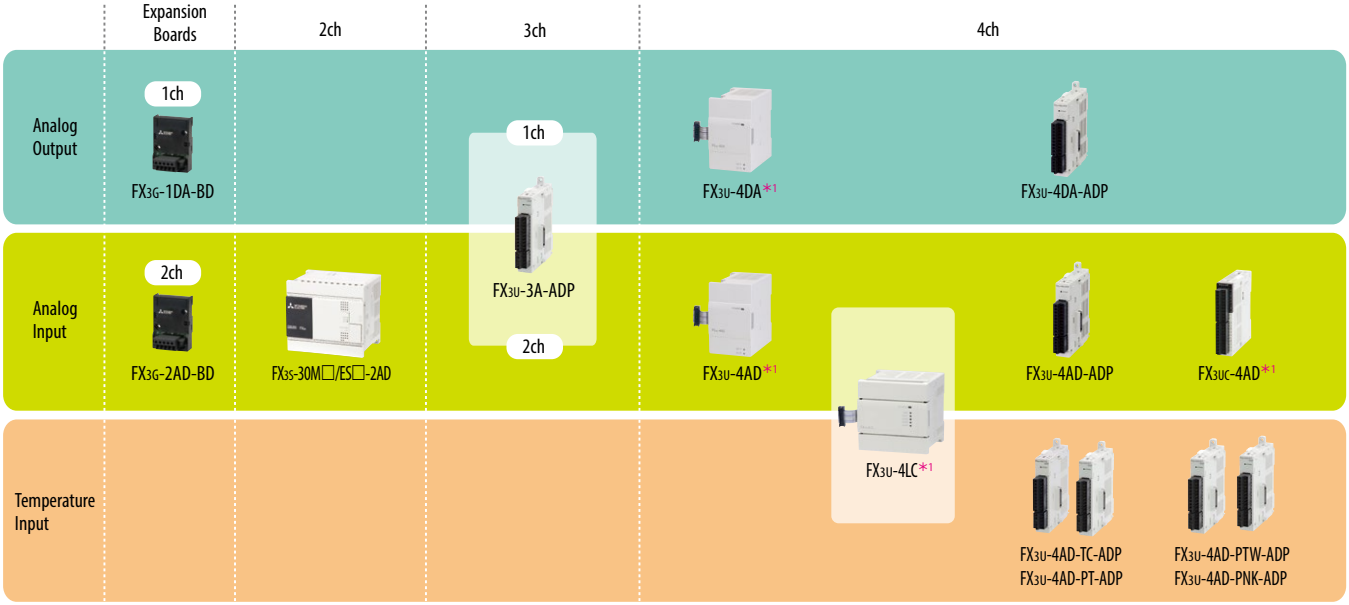


*1: Production will be discontinued in September 2028.


High-Speed Control

All FX series PLCs are equipped with built-in open collector high-speed counters; up to 60 kHz for the FX3G/FX3GC/FX3S and up to 100 kHz for the FX3U/FX3UC. These high-speed inputs are connected to external devices such as encoders and ultrasound sensors for system feedback control. The FX3U main unit can be expanded with high-speed input special adapters, enabling differential line receiver inputs up to 200 kHz.



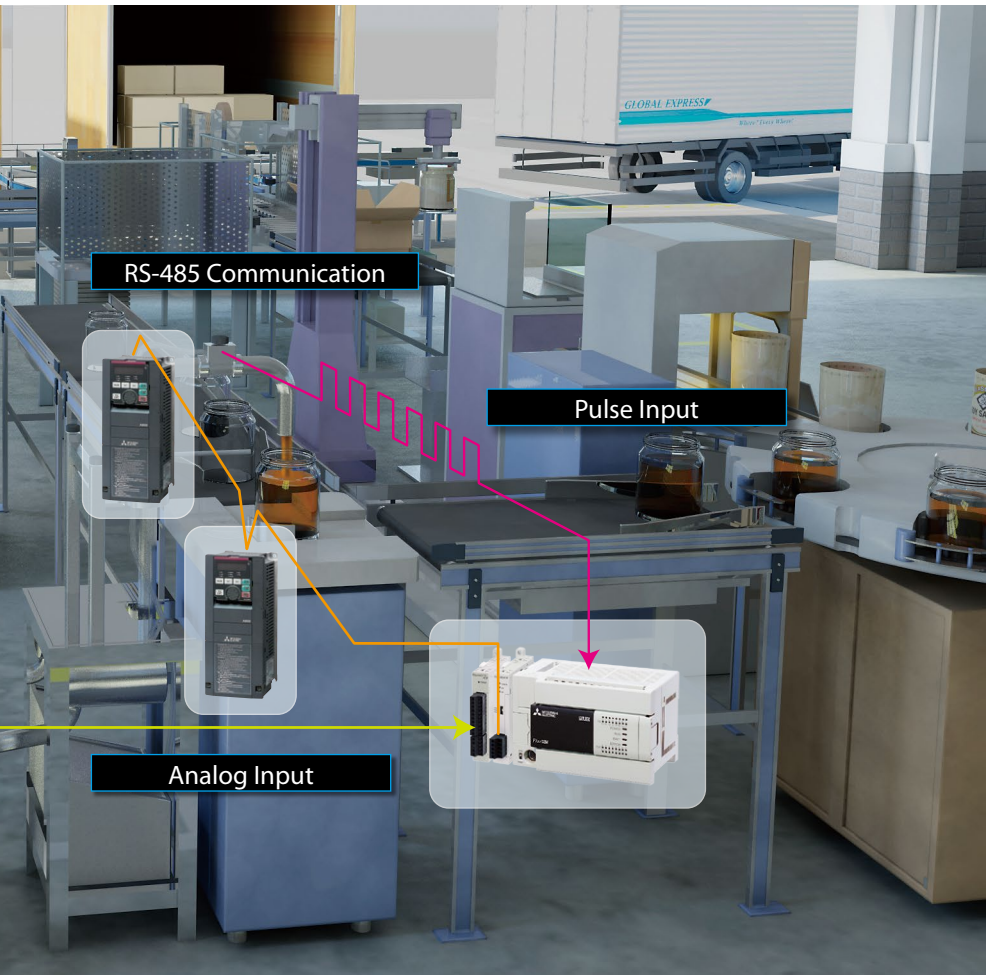


FX Integrated High-Speed Counter

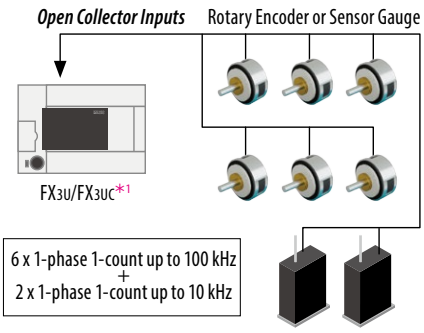

Note : Up to 50 kHz when using 2-phase 2-count

FX with High-Speed Input Adapter

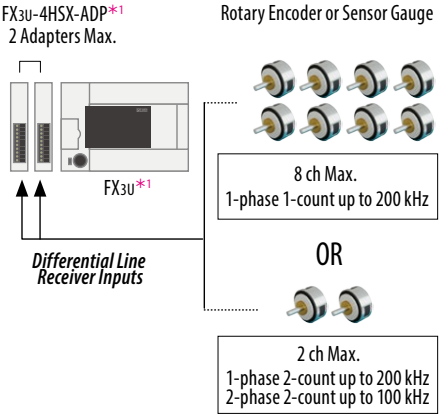


Note : When using high-speed input special adapters, the same numbered I/O terminals on the PLC main unit may not be used.

Inverter Control



Also known as Variable Frequency Drives (VFDs), Inverters play a vital role in many conveyor, pumping, and positioning systems. While the output frequency of the inverter can be varied easily using analog outputs on any of the FX series PLCs, transfer of both parameters and commands between the PLC and Mitsubishi Electric Inverters can be handled in FX series PLCs through serial communication using FREQROL protocol. Each RS-485 interface on an FX series PLC can control up to 8 Inverters with a total network extension of up to 500 m when using the FX3U-485ADP-MB.



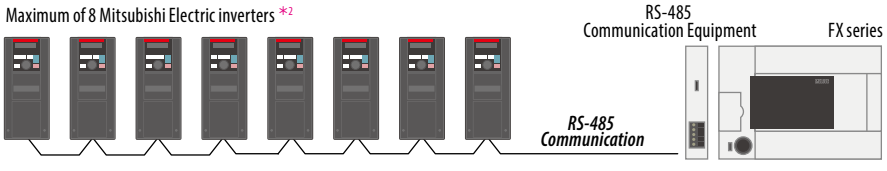

*1: Production will be discontinued in September 2028.
*2: Applicable Inverters: A800/F800/E700/D700


Positioning

The built-in high-speed pulse outputs on all transistor-type FX series PLCs, along with special positioning operations instructions, are designed to satisfy simple independent-axis positioning applications using servo and stepping motors with speed and precision. For more advanced applications like 4-axis control and noise-free interpolation, the FX system can be expanded with special adapters and special function blocks. With high performance at a low cost, the FX series positioning possibilities provide a formidable package.




Upgraded Built-in Positioning Instructions for Easier Use

The FX series allows for up to 3 axes of independent positioning control at up to 100 kHz. Connecting two high-speed output special adapters to the FX3U allows for up to 4 axes of control at up to 200 kHz.*1

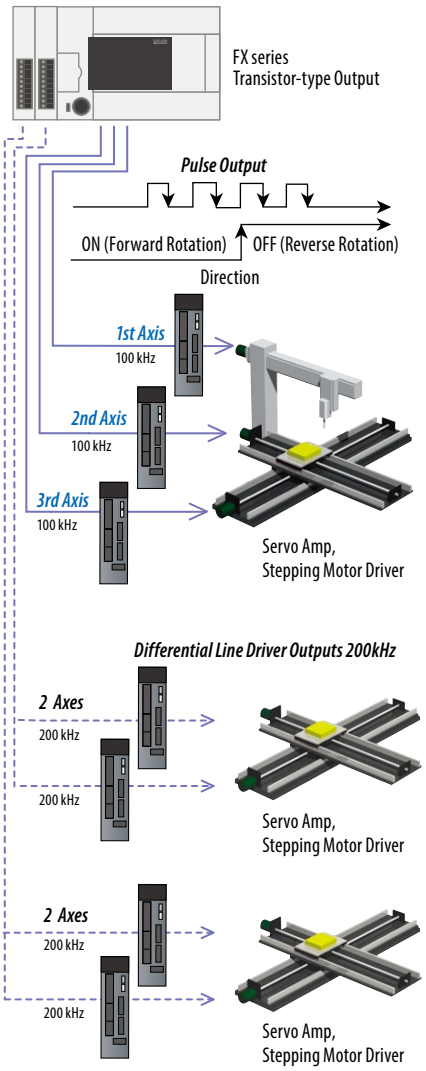


*1: When using high-speed output special adapters, the same numbered I/O terminals on the PLC main unit may not be used.
*2: Discontinued Production in December 2026.
*3: Production will be discontinued in September 2028.
*4: FX3U built-in axes are not available when the High-Speed Output ADPs are attached.

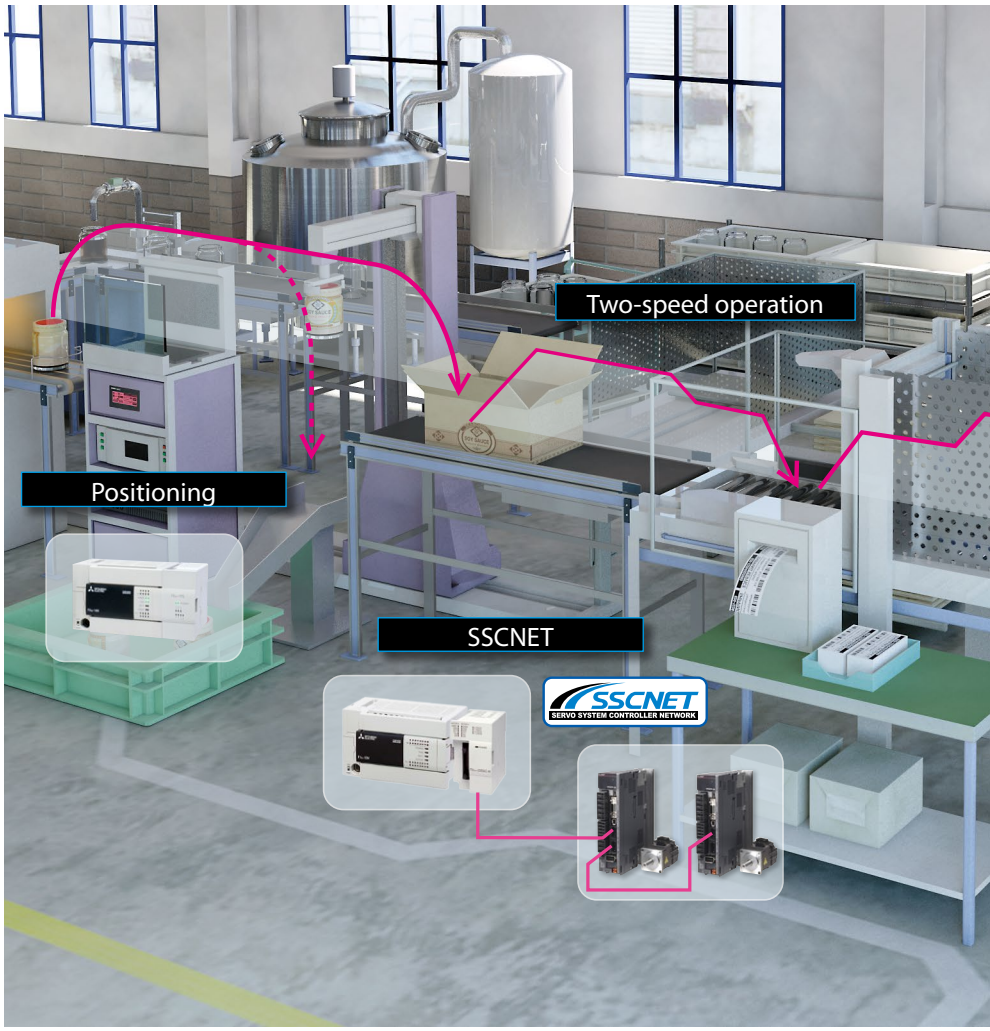


Easy Step-By-Step Positioning Programming Using the DTBL Instruction.


Only FX3U, FX3UC, FX3G, and FX3GC

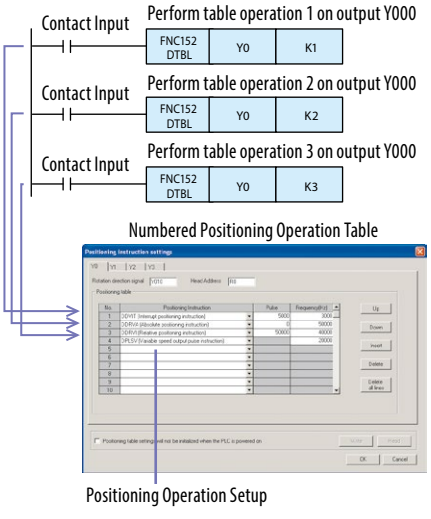

Positioning Modules Lineup



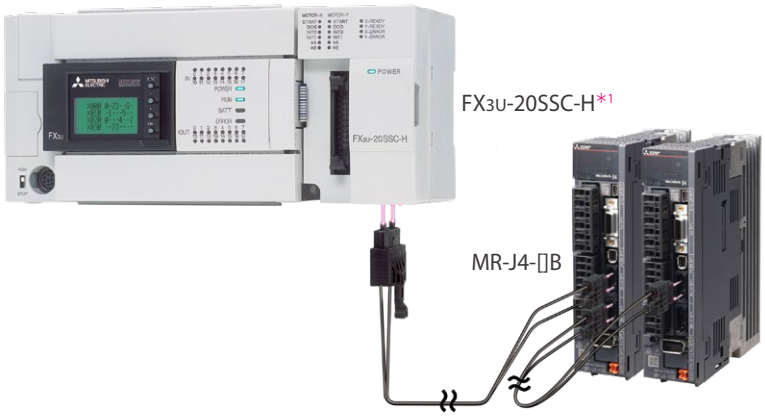

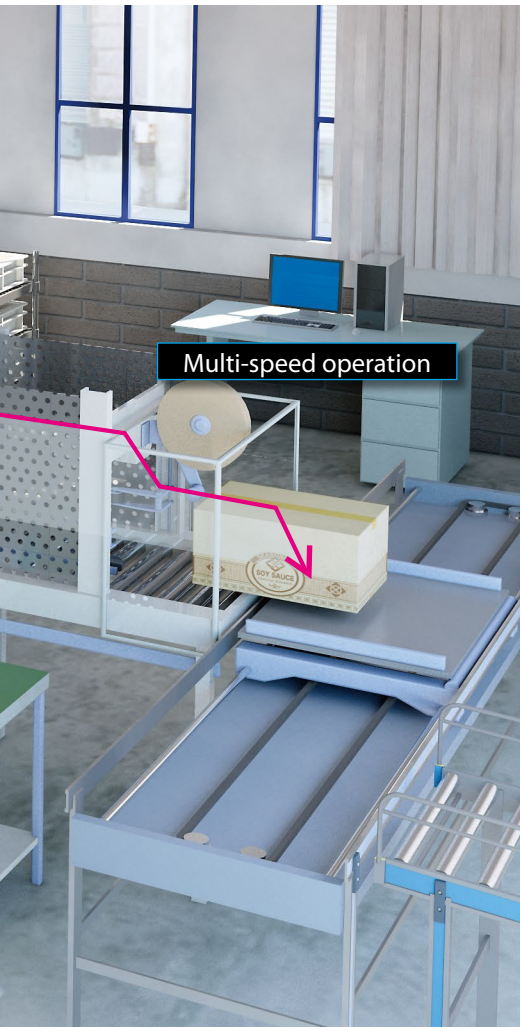


High-Speed, High-Precision Positioning Solution

For advanced positioning applications, the FX3U and FX3UC controllers can be expanded with the FX3U-20SSC-H special function block. With SSCNET III, smooth, high-speed, high- precision operations become easy to setup and execute. Use the FX PLC to set positioning and servo parameters, while monitoring the absolute axis position for program interaction.


Plug-and-Play fiber optic cable connectivity to servo equipment eliminates wiring errors and enhances data transfer reliability and noise resistance while supporting node-to-node distances of up to 50 m. At 50 Mbps transmission speed with highly reduced communication cycle times as low as 1.77 ms, the FX3U-20SSC-H and SSCNET III drastically improve positioning accuracy and create a high-powered solution for a variety of applications.

Short communication cycle



2-Axis 50 Mbps Networked Control

Unparalleled communication speed through SSCNET III

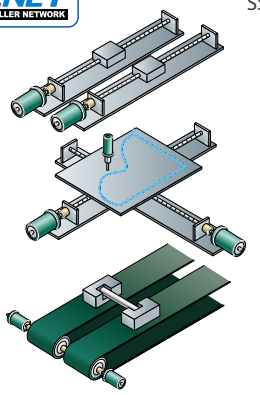


Interpolated Positioning
- 2-Axis Linear Interpolation
- 2-Axis Circular Interpolation

Simultaneous Start Function
Both the X and Y axes can be controlled with a timed start, allowing for synchronous positioning operations.

Inching Operation

If the forward/reverse JOG activation time is within the JOG determination time, a pulse string equivalent to ±1 (user unit) is output at the current address.

Example JOG determination time: 500 ms

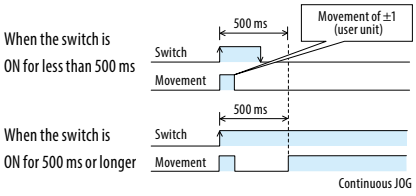

Pulse Output Blocks



FX3U-1PG*1
(1-axis)


Positioning Block




FX3U-20SSC-H*1
(2-axis)

Changing the Speed and Target Address


Speed Change Function
The operation speed can be changed arbitrarily during operation.



Speed Override Function
The operation speed ratio can be changed arbitrarily during operation.



Target Address Change Function
The target address can be changed to a new address arbitrarily during operation.




*1: Production will be discontinued in September 2028.

Open Field Networks

Across factory floors, though applications and databases may be made up of equipment from different manufacturers, reliable information must be passed both quickly and easily. To accomplish this, one must keep everyone speaking the same language, and therefore it is best to use open networks as a backbone to the control system. Several of the supported FX series open network extensions are shown below.




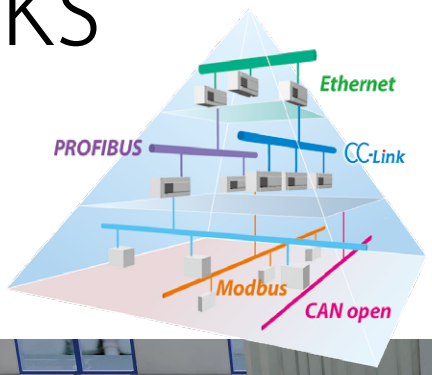


CC-Link


For inter-system data transfer and remote I/O handling, CC-Link enables the update of word and bit devices refreshed at up to 10 Mbps. With CC-Link based I/O, the 256 I/O control limit of the FX3U/FX3UC goes up to 384*1, and with CC- Link Ver. 2.00, expanded cyclic transmission can also be performed, enabling more link points to be established.
Programming via CC-Link is also a new feature of the FX series. A user connected to the master FX PLC programming port can access all connected intelligent device station FX PLCs from one location, saving time and money.

*1: FX3G/FX3GC goes up to 256.

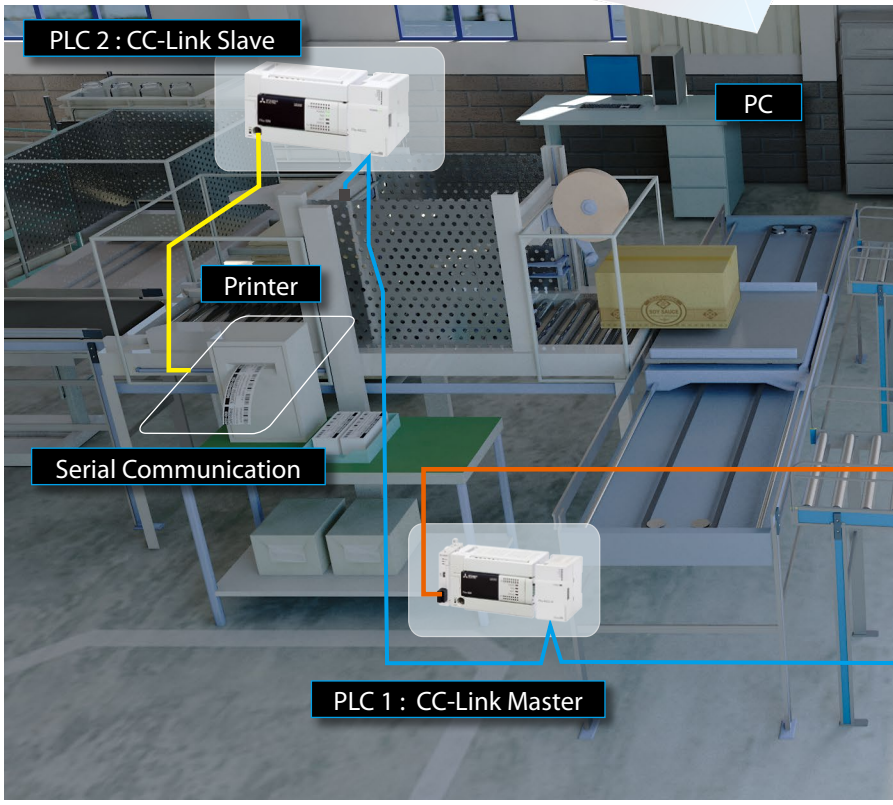

CC-Link System Configuration

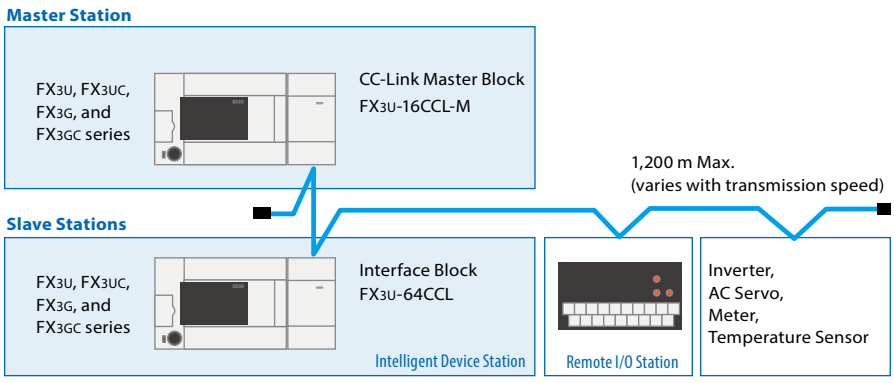

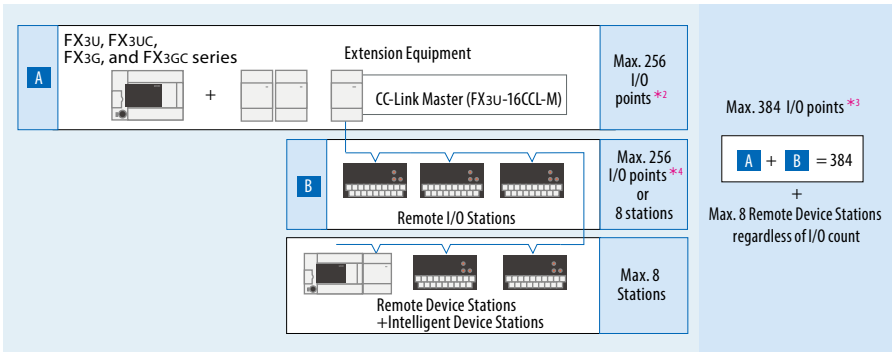

Communication Modules Lineup




*2: FX3G/FX3GC up to 128 I/O points
*3: FX3G/FX3GC goes up to 256.
*4: FX3G/FX3GC up to 128 I/O points or 4 stations.
*5: Production will be discontinued in September 2028.

Serial Communication


For related systems and data transfer with external equipment and third party devices, serial communication has long been the established connection method. Serial communication allows the FX series to connect both efficiently and reliably with other PLCs, sensors, printers, and modems, etc. Multi-drop networks, non-protocol communication, and remote maintenance are just some of the many uses.



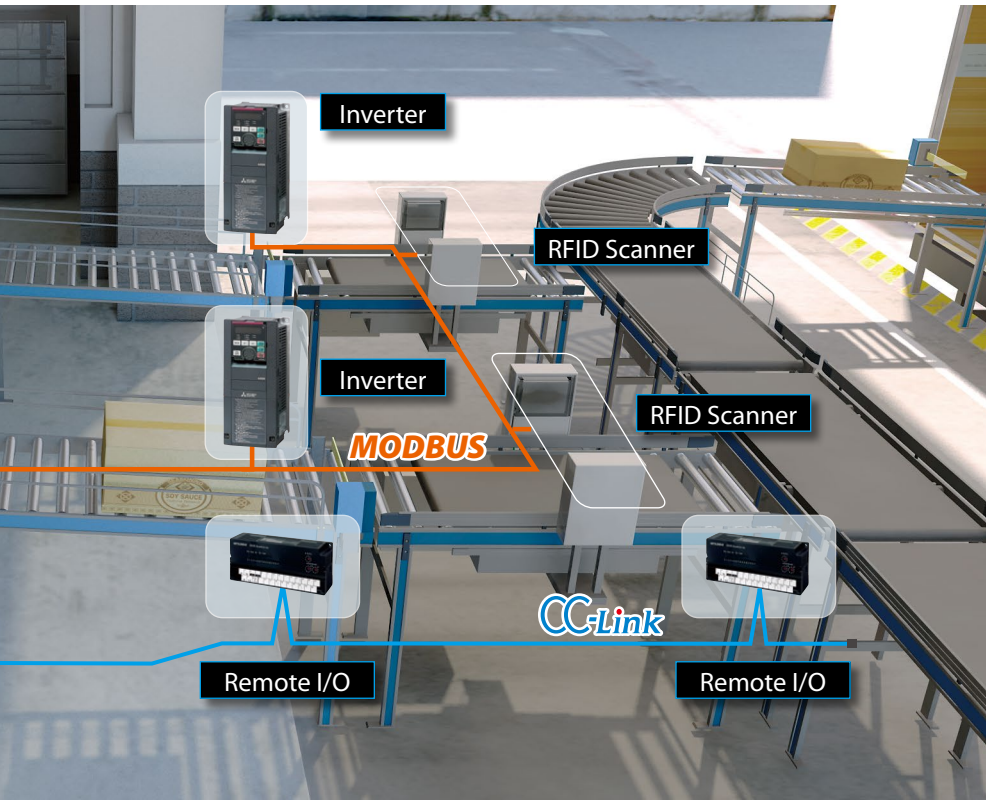

MODBUS


Both an open network and a serial communicator, MODBUS-RTU allows FX series PLCs to interface with a wide range of equipment and devices. Using RS-485 and RS-232C, the FX3U-485ADP-MB and FX3U-232ADP-MB expand the networking capabilities of the FX system while still supporting general communication with other FX systems, non-protocol devices, and serial modems.
MODBUS serial communication parameters and communication execution are setup easily within the ladder program using GX Works2 or GX Developer, and the FX MODBUS Master uses the special ADPRW instruction to communicate with up to 16 Slave stations.

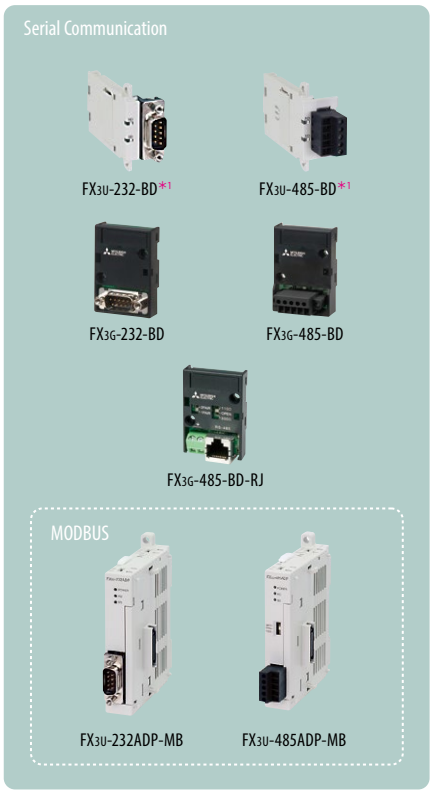

Communication Protocols


N:N Network
Communication between FX series PLCs

Connect up to 8 FX PLCs using N:N Networking to allow data exchange between each station.

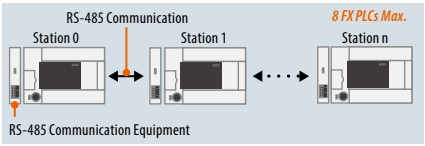


Computer Link (Dedicated Protocol)
Communication with a PC

1:N Computer to PLC Communication
The PC can communicate with a network of up to 16 FX, A, and Q PLCs.

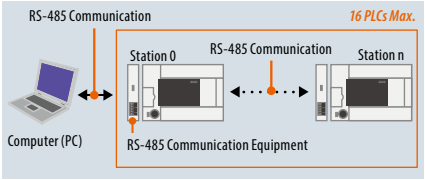


1:1 RS-232C Communication Equipment to PLC
When communicating over an RS-232C interface, the PC can communicate with one FX PLC.




Parallel Link
Communication between 2 FX series PLCs of the same series

Auxiliary Relays (M) and Data Registers (D) are updated automatically between two PLCs of the same series.

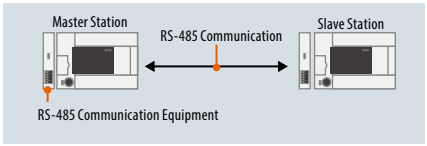


Remote Maintenance
Communication with a PC

Using a modem connection, a PC can monitor/force devices and perform program upload/download to a PLC from remote locations.

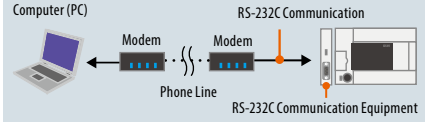

Non-Protocol Communication (RS/RS2 Instructions)
PLC communication with Printers, Barcode Readers, etc.


Serial communication is possible between a PLC and any external equipment with an RS-232C or RS-485 (RS-422) interface.



*1: Production will be discontinued in September 2028.

Information Exchange

Networks and remote connections go hand in hand. Get connected for remote factory control and maintenance.



Ethernet

In the information age, Ethernet has become the personal, commercial and industrial standard for easy and efficient data transfer. Whether it is between multiple PLC systems or PLC and PC servers, industrial users dictate foremost that data must always be consistent even in high-noise environments. The FX series uses industrial Ethernet on up to 8 ports, with features such as PLC-to-PLC communication, extensive e-mail send/receive options, and program upload/download.



Ethernet Communication Modules Lineup

Ethernet



FX3U-ENET-ADP*1



FX3U-ENET(-L)*1


*1: Discontinued Production in March 2025.

ENET (-L) FX3U-ENET(-L) support ENET ADP FX3U-ENET-ADP support

MC Protocol Communication

ENET (-L) ENET ADP

Device data read-out/writing to a PLC from a PC is possible.



Parameter Setup

ENET ADP


Various parameters can easily be set from the parameter setting screen of GX Works2.



Data Monitoring

ENET ADP


PLC device values and the status of the Ethernet adapter can be monitored from a browser on a personal computer.



Remote Maintenance

ENET (-L) ENET ADP

Program read/write can be made by GX Works2 connected via VPN.*2




*2: VPN (Virtual Private Network): Service that encrypts communication and connects points across a public network

Fixed Buffer Communication

ENET (-L)


Communication with PLC and other devices possible using buffer memory (fixed buffer).

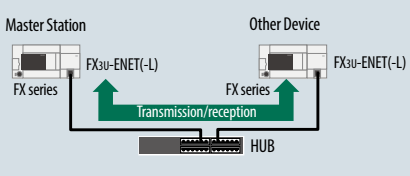

E-mail Transmission

ENET (-L)

PLC can send and receive*3 e-mail via mail server (SMTP).

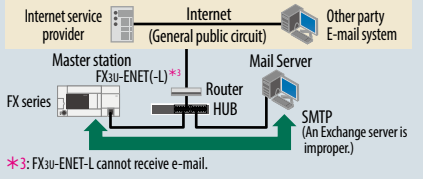

*3: FX3U-ENET-L cannot receive e-mail.

Data Management

Keeping records of components, key processes, and events are crucial for maintaining a reliable system. FX PLCs offer multiple methods for saving data depending on user needs.





Data Logging

Data collected from the main unit can be stored.

Storing Data in the PLC

Utilize extension registers for data storage. 24,000 points are available in FX3G/FX3GC and 32,768 are available in FX3U/FX3UC.


FX3U*1


FX3G*2

Storing Data in a Memory Cassette

Utilize extension file registers for data storage on a memory cassette. 24,000 extension file registers can be used with FX3G and 32,768 can be used with FX3U/FX3UC.


For FX3U/FX3UC


For FX3G

Collecting Data on a Personal Computer

A PC that is always on can log PLC data with MX Component and MX Sheet.



*1: Production will be discontinued in September 2028.
*2: Production will be discontinued in December 2026.

Visualization



To provide ease of operation to a system, the overall look and feel of the interface is key.
The GOT2000 series Graphical Operation Terminal HMIs offers colorful and sharp touch-screen displays that make interacting with the system straight forward. If only a simple text-display is needed for simple monitoring and device setting, display modules are also available.

GOT2000

Graphic Operation Terminal



With FX series PLCs

- *Transparent Mode*
- *List Editor*
- *Multi-Connection*
- *Common Software For All GOTs*
- *Backup / Restoration function*

GT27

Advanced model with multi-touch gesture functions.

Communication interfaces such as Ethernet, RS-232, RS-422/485, USB host/device and SD memory card are standard features. High capacity data processing ensures smooth screen operation even when multiple tasks, such as logging, script, alarm, or device data transfer, are running. In addition, image recording, image playback, video image input, and RGB output are available, thus all the functions of GOT2000 can be used on GT27 models.





5.7-inch
TFT LCD 65,536 colors
GT2705-VTBD
8.4-inch
TFT LCD 65,536 colors
GT2708-[]TBA
GT2510-[]TBD
10.4-inch
TFT LCD 65,536 colors
GT2710-STBA
GT2710-STBD
GT2710-VT[]A
GT2710-VT[]D
12.1-inch
TFT LCD 65,536 colors
GT2712-ST[]A
GT2712-ST[]D
15-inch
TFT LCD 65,536 colors
GT 2715-XTBA
GT2715-XTBD

GT25

High performance, cost efficient, mid-range model.

High capacity data processing ensures smooth screen operation even when multiple tasks, such as logging, script, alarm, or device data transfer, are running.



8.4-inch
TFT LCD 65,536 colors
GT2508-VT[]A
GT2508-VT[]D
10.4-inch
TFT LCD 65,536 colors
GT2510-VT[]A
GT2510-VT[]D

12.1-inch
TFT LCD 65,536 colors
GT2512-STBA
GT2512-STBD

Open Frame Model

Installing the GOT2000 from the back side of the control panel complements the machine-design surface. Using a stainless-look environmental protection sheet allows the touch panel to blend into the production machines for the pharmaceutical and food industries.



8.4-inch
TFT LCD 65,536 colors
GT2508F-VTNA
GT2508F-VTND
10.4-inch
TFT LCD 65,536 colors
GT2510F-VTNA
GT2510F-VTND

12.1-inch
TFT LCD 65,536 colors
GT2512F-STNA
GT2512F-STND

FX3G-5DM*1 Display Module


This backlight display module can be installed directly into the front face of the FX3G or on top of an FX3G expansion board and can be used to display the built in real-time clock, bit device statuses and word device values, and error codes with step numbers, force bit device statuses, and adjust word device values. Keywords can be added or cancelled enabling security layers that only allow authorized operators to edit devices via the display module.



FX3U-7DM*1 Display Module & Holder

This backlight display module can be installed directly into the front face of the FX3U or mounted in a cabinet or panel using the dedicated connection cable and holder kit. The FX3U-7DM can be used to monitor and adjust devices similar to the FX3G-5DM, but with added features like device clearing and user message display.



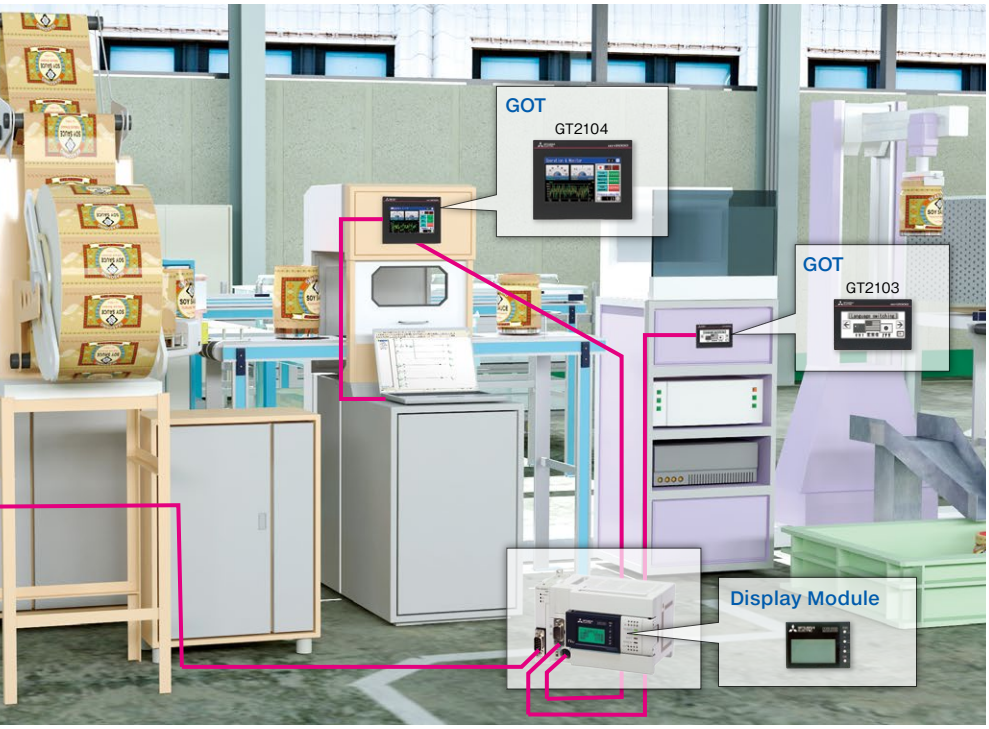

FX3S-5DM*1 Display Module

This seven-segment and icon display module can be installed directly into the front face of the FX3S together with an expansion board. The FX3S-5DM can be used to monitor and change device states and values.



*1: Discontinued Production in March 2025.

GT21

Compact model with exciting possibilities.

Introducing a compact model with high resolution LCD display. The GOT wide model satisfies your needs in various applications. Enhanced visualization in industrial environments and an excellent choice also for non-FA applications.



3.8-inch
TFT LCD
GT2103-PMBD
GT2103-PMBDS
GT2103-PMBDS2
GT2103-PMBLS

4.3-inch wide
TFT LCD 65,536 colors
GT2104-RTBD
7-inch wide
TFT LCD 16 gray scales
GT2107-WTBD
GT2107-WTSD

GOT SIMPLE

Using Mitsubishi Electric industrial devices together with the GOT SIMPLE series provides ideal, simple solutions that enhance efficiency and reduce cost in production.



7-inch
TFTLCD
GS2107-WTBD
10-inch
TFTLCD
GS2110-WTBD

Handy GOT

Hand held terminals support mobile machine visualization and control.



5.7-inch
TFT LCD 65,536 colors Handy type
GT1455HS-QTBDE
TFT LCD 16 gray scales Handy type
GT1450HS-QMBDE
6.5-inch
TFT LCD 65,536 colors Handy type
GT1665HS-VTBD
Handy GOT mounting box
GT16H-CNB-42S

The Handy GOT is used as an operation terminal in connection with the controllers such as MELSEC PLCs or third party PLCs. It is an all-in-one operation terminal that is equipped with the display unit with touch switches integrated with the mechanical keys for inputting a command to a machine.

Software

In today's world, programming software for PLCs is a forever evolving process. Customers place more focus on reusable program code and user friendly software that helps to reduce errors and programming time, and manage the programming process.

Programming and Simulation Software

Program FX series PLCs with ease using GX Works2

Simple to program, easy to use programming environment


Improve design efficiency | Reduce debugging time | Reduce downtime | Protect important data

GX Works2 offers two styles of project development to fit different programming needs.

- Program complex operation with familiar ladder
- Easy to use version of GX Developer
- Import projects from GX Developer


Simple Project

GX Developer




Import

GX Works2



- Embody frequently used code in function blocks, which can then be reused
- Use and share function blocks in a program library
- Write program code similar to C programming language

Structured Project

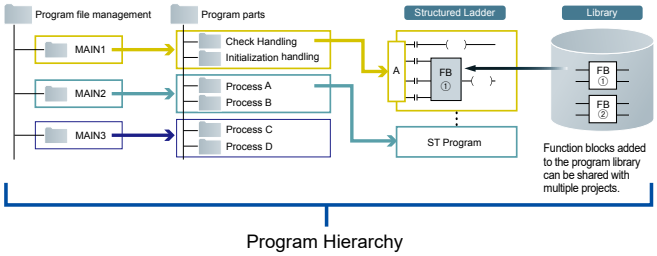

Program Hierarchy

Programming Software

GX Works2

The key to good software is that it is easy to use and intuitive. The GX Works2 PLC programming package offers this in an exceptional way with different programming styles and advanced options. Other features like excellent debugging options, project documentation, and security management and more, reduce the total cost throughout a project.

FX Programming Packages


FX Configurator-FP*1 & FX Configurator-EN(-L)*2


When using the FX3U-20SSC-H positioning block, or the FX3U-ENET Ethernet block, these FX programming packages simplify special function block setup and enable dedicated monitoring and testing capabilities between the PC and the module. The FX Configurator-FP configures the FX3U-20SSC-H positioning unit, including the parameter of the connected servos and features extensive monitoring and testing functions. The FX Configurator-EN(-L) provides an easy setup environment for the FX3U-ENET(-L) Ethernet block.


Screen Design Software

GT Works3

The all new GT Works3 is the most advanced screen design environment.
Experience the dawn of a new era in visualization Design. To quickly transform the front end of your machine into a more user friendly and sophisticated interface you need a design environment that is both intuitive and efficient.
GT Works3 is the quintessential environment for visual design and configuration. User-oriented functions are integrated based on three main concepts - simplicity, definition and ease of use.

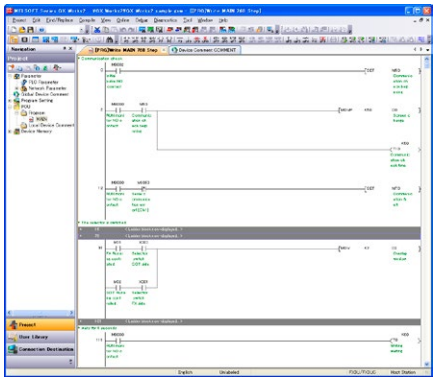

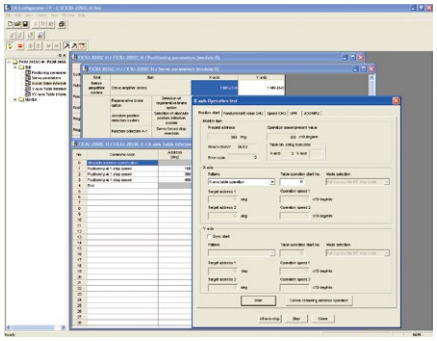

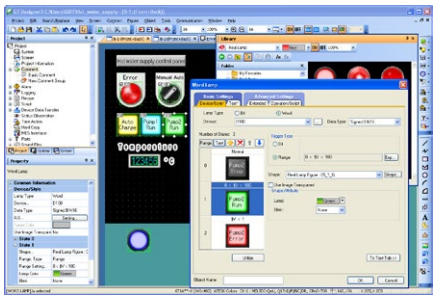

*1: Production will be discontinued in September 2028.
*2: Discontinued Production in March 2025.

Technical Information Section

1. FX Main Units

SYSTEM DESCRIPTION & SPECIFICATIONS

◆ FX series Selection Guide 26
◆ FX PLC Extension Explanation 27
◆ FX series Configuration 28
◆ Programming Specifications 34
◆ Instruction 36
◆ Environmental & Electrical Specifications 39
◆ FX Main Units Specifications 41
◆ Description of Unit Components 46

2. FX Input/Output Extension

◆ I/O Extension 48

3. FX Analog Extension

◆ Analog Input 53
◆ Analog Output 54
◆ Combination Analog Input & Output 56
◆ Temperature Input 57

4. FX High-Speed I/O & Positioning Extension

◆ High-Speed Input & Counters 59
◆ High-Speed Output & Positioning 60

5. FX Communication & Networking Extension

◆ Serial Communication 62
◆ Networking 64

6. FX Interfaces & Power Supplies

◆ Interface Options 65
◆ Power Supply Units 66

7. Accessories

◆ Memory Cassettes & Backup Batteries 67
◆ Interface Units & Terminal Blocks 68
◆ Connection Cables & Connectors 69

8. Software & Programming

◆ MELSOFT 70
◆ Configuration software 71

Certifications 72

Index 74

FX SERIES SELECTION GUIDE

Select System Item → Select Item Specification → Select an Applicable FX Model

			Terminal-type I/O			Connector-type I/O	
			Non-Extendable*	Extendable		Extendable	
	System Item	Item Specification*	FX3S	FX3G	FX3U	FX3GC	FX3UC
Hardware	I/O points	Up to 30 local I/O's	✓	★	★	★	★
		Up to 128 local I/O's		✓	★	✓	★
		Up to 256 local I/O's			✓		✓
		Up to 256 local and network I/O's		✓	★	✓	★
		Up to 384 local and network I/O's			✓		✓
	Power Supply	AC Power	✓	✓	✓		
		DC Power	✓	✓	✓	✓	✓
	Input type	100 V AC			✓		
		24 V DC	✓	✓	✓	✓	✓
	Output type	Relay	✓	✓	✓		✓
		Transistor	✓	✓	✓	✓	✓
		Triac			✓		
	CPU Speed	Standard	✓	✓	★	✓	★
		Advanced			✓		✓
	Communication ports	USB	✓	✓		✓	
		RS-422	✓	✓	✓	✓	✓
		Ethernet					
	Analog I/O	Input : 2 Output : 1	✓*1				
Options	Analog I/O (Current / Voltage)	Up to 4 ADP channels	✓	✓	✓	✓	✓
		Up to 8 ADP channels		✓*2	★	✓	★
		Up to 16 ADP channels			✓		✓
		Up to 64 special function block channels		✓	✓	✓	✓
	Temperature Sensor Input	Up to 4 ADP input channels	✓	✓	✓	✓	✓
		Up to 8 ADP input channels		✓*2	★	✓	★
		Up to 16 ADP input channels			✓		✓
		Up to 64 special function block input channels		✓	✓	✓	✓
		Temperature control		✓	✓	✓	✓
	Network	CC-Link (Master station/Intelligent device station/Remote station)		✓	✓	✓	✓
		CANopen®		✓	✓	✓	✓
		J1939		✓	✓	✓	✓
		Ethernet ⚠Discontinued	✓	✓	✓	✓	✓
		PROFIBUS-DP Master			✓		✓
		PROFIBUS-DP Slave		✓	✓	✓	✓
	Communication	N : N Network/Parallel Link	✓	✓	✓	✓	✓
		Computer Link (RS-232C/RS-485)	✓	✓	✓	✓	✓
		Non-Protocol Communication: 1 Channel (RS-232C/RS-485)	✓	★	★	★	★
		Non-Protocol Communication: Multi-Channel (RS-232C)		✓	✓	✓	✓
		Non-Protocol Communication: Multi-Channel (RS-485)		✓	✓	✓	✓
		Add-on Communication Ports: RS-485	✓	✓	✓	✓	✓
		Add-on Communication Ports: RS-232C	✓	✓	✓	✓	✓
		Add-on Communication Ports: USB			✓		
		Embedded USB	✓	✓		✓	
		MODBUS	✓	✓	✓	✓	✓
	Inverter Control	Analog	✓	✓	✓	✓	✓
		Pulse width modulation	✓	✓	✓	✓	✓
		RS-485 Communication	✓	✓	✓	✓	✓
	Positioning	1 - 2 100 kHz Axis Built-in Positioning	✓	✓	★	✓	★
		Up to 3 x 100 kHz Axis Built-in Positioning		✓*3	✓		✓
		Up to 4 x 200 kHz Axis with High-Speed Output Adapters			✓		
		Up to 8 x 1 MHz Axis with Special Function Blocks			✓		✓
		Up to 16 SSCNET III Axis with Special Function Blocks			✓		✓
		Cam switching			✓		✓
	High-Speed Counters	Up to 6 high speed counters, Max. 60 kHz	✓	✓	★	✓	★
		Up to 8 high speed counters, Max. 100 kHz			✓		✓
		Up to 8 high speed counters with 200 kHz Adapter			✓		
		Additional Extension using High-Speed Counter Block			✓		✓
	Storage	Source data storage			✓		✓
	Data Logging	CF card Adapter ⚠Discontinued			✓		✓

*: Some items require additional extension modules in order to function where other connection rules and requirements may apply. For more details, refer to the respective product manuals.

✓: Contains required functionality

★: Higher functionality or more expandability

*1: FX3S-30M□/ES□-2AD

*2: 14 and 24 I/O points main units: Max. 4 channels


*3: 14 and 24 I/O points main units: Max. 2 axes



Adapter



Main Unit



I/O Extension



Special Function Block



Expansion Board


Expansion Boards 	The expansion boards, also called BDs, are a basic CPU function extension. Thanks to the compact dimensions no additional installation space is required. Programming is done directly via special commands and dedicated data register in the PLC. Available are serial communication, analog and digital I/O BDs.
Adapters 	The Special Adapters, also called ADPs, add standard high-speed functions to the PLC. Mounted on the left side, these units are extremely compact and easy to use. The programming is similar to the BDs via special commands and dedicated data registers in the PLC. Available are various serial communication, Ethernet, analog, temperature input, positioning, high-speed counting and data logging ADPs. Compared to the BDs the ADPs offer more flexibility and performance.
Special Function Blocks 	The Special Function Blocks, also called SFBs, are the most advanced function extension available for the FX PLC. Thanks to the standardized communication via memory integrated into the SFBs, programming is straightforward. The integrated CPU performs PLC scan time independent operation perfectly fitted for networking or positioning tasks, thus reducing the load on the PLC main unit. Up to 8 different units can be connected to the main unit. Available are analog, serial communication, networking, positioning, high-speed counting and temperature control. Compared to the ADPs, the SFBs offer higher functionality and more flexibility. Dedicated SFBs for the FX3GC and FX3UC are available as well.
I/O Extensions 	Digital I/O extensions are available with or without power supply. A wide range from 8 to 48 I/O points with different inputs and outputs are available. There is no limitation on the number of extension units or blocks, you can design the system to match application requirements, just make sure to check the system power supply and number of available I/O points. Dedicated I/O blocks for the FX3GC and FX3UC are available as well.

FX SERIES CONFIGURATION

FX3U

5 Communication ADP | 4 Analog ADP | 3 High-Speed Output ADP / High-Speed Input ADP | 1 FX3U Main Unit (2 BD) | 6 FX2N I/O Extensions | 7 Power Supply Unit | 8 FX3U Special Function Blocks

Expansion Boards*2


FX3U-422-BD

Communication
FX3U-232-BD
FX3U-422-BD
FX3U-485-BD
FX3U-USB-BD

OR


Interface Board
FX3U-CNV-BD

Analog Setpoint
FX3U-8AV-BD

2

Special Adapters

5


FX3U-232ADP-MB

Communication
FX3U-232ADP-MB
FX3U-485ADP-MB


4


FX3U-4AD-PTW-ADP

Analog
FX3U-4AD-ADP
FX3U-4DA-ADP
FX3U-3A-ADP*1

Temperature
FX3U-4AD-PT-ADP
FX3U-4AD-PTW-ADP
FX3U-4AD-TC-ADP
FX3U-4AD-PNK-ADP

3



FX3U-4HSX-ADP

High Speed Counter
FX3U-4HSX-ADP*2

Positioning
FX3U-2HSY-ADP*2

FX3U Main Units

1



FX3U-32M

■ FX3U Main Units 16-128 I/O

FX3U-16MR/ES(-A) AC D R	FX3U-48MR/ES(-A) AC D R	FX3U-80MR/ES(-A) AC D R
FX3U-16MT/ES(-A) AC D T1	FX3U-48MT/ES(-A) AC D T1	FX3U-80MT/ES(-A) AC D T1
FX3U-16MT/ESS AC D T2	FX3U-48MT/ESS AC D T2	FX3U-80MT/ESS AC D T2
FX3U-16MR/DS DC D R	FX3U-48MR/DS DC D R	FX3U-80MR/DS DC D R
FX3U-16MT/DS DC D T1	FX3U-48MT/DS DC D T1	FX3U-80MT/DS DC D T1
FX3U-16MT/DSS DC D T2	FX3U-48MT/DSS DC D T2	FX3U-80MT/DSS DC D T2
FX3U-32MR/ES(-A) AC D R	FX3U-64MR/ES(-A) AC D R	FX3U-128MR/ES(-A) AC D R
FX3U-32MT/ES(-A) AC D T1	FX3U-64MT/ES(-A) AC D T1	FX3U-128MT/ES(-A) AC D T1
FX3U-32MT/ESS AC D T2	FX3U-64MT/ESS AC D T2	FX3U-128MT/ESS AC D T2
FX3U-32MS/ES AC D TR	FX3U-64MS/ES AC D TR	
FX3U-32MR/DS DC D R	FX3U-64MR/DS DC D R	
FX3U-32MT/DS DC D T1	FX3U-64MT/DS DC D T1	
FX3U-32MT/DSS DC D T2	FX3U-64MT/DSS DC D T2	
FX3U-32MR/UA1 AC E R	FX3U-64MR/UA1 AC E R	

AC AC Power supply
DC DC Power supply
D DC Input (sink/source)
E AC Input
R Relay Output
T1 Transistor (sink)
T2 Transistor (source)
TR Triac Output

Optional Equipment and Software


GT25

■ GOT
GOT2000
(GT27/GT25/GT23/GT21)
GOT SIMPLE

■ Interface Converters
FX-USB-AW*2
FX-232AWC-H

■ Software
GX Developer
GX Works2

*1: Firmware version 2.61 or later. *2: Production will be discontinued in September 2028.

FX3UC

3 Communication ADP | 2 Analog ADP | 1 FX3UC Main Unit | 4 FX2NC I/O Extensions | 5 FX3UC/FX2NC Special Function Blocks | 6 FX3UC-1PS-5V or FX2NC-CNV-IF | 7 FX2N Unpowered I/O Extensions | 8 FX3U Special Function Blocks

Special Adapters

3



FX3U-232ADP-MB

Communication
FX3U-232ADP-MB
FX3U-485ADP-MB

2


FX3U-4AD-ADP


Analog
FX3U-4AD-ADP
FX3U-4DA-ADP
FX3U-3A-ADP*1


FX3U-4AD-PNK-ADP

Temperature
FX3U-4AD-PT-ADP
FX3U-4AD-PTW-ADP
FX3U-4AD-TC-ADP
FX3U-4AD-PNK-ADP

FX3UC Main Units

1


FX3UC-64M


■ FX3UC Main Units 16-96 I/O

FX3UC-16MT/D* DC D1 T1	FX3UC-64MT/D* DC D1 T1
FX3UC-16MT/DSS DC D2 T2	FX3UC-64MT/DSS DC D2 T2
FX3UC-16MR/D-T* DC D1 R	FX3UC-96MT/D* DC D1 T1
FX3UC-16MR/DS-T DC D2 R	FX3UC-96MT/DSS DC D2 T2
FX3UC-32MT/D* DC D1 T1	
FX3UC-32MT/DSS DC D2 T2	

DC DC Power supply
D1 DC Input (sink)
D2 DC Input (sink/source)
R Relay Output
T1 Transistor Output (sink)
T2 Transistor Output (source)

* Refer to the HARDWARE MANUAL for system configuration.

Optional Equipment and Software



GT25

■ GOT
GOT2000
(GT27/GT25/
GT23/GT21)
GOT SIMPLE

■ Software
GX Developer
GX Works2


■ Interface Converters
FX-USB-AW*3
FX-232AWC-H

Accessories


FX3U-FLROM-64L

■ Memory Cassettes*3
FX3U-FLROM-16
FX3U-FLROM-64
FX3U-FLROM-64L
FX3U-FLROM-1M*2

■ I/O Cables
General I/O cable
FX-16E-500CAB-S (5 m)




■ Connecting to Terminal Blocks*5
FX-16E-150CAB (1.5 m)
FX-16E-300CAB (3 m)
FX-16E-500CAB (5 m)

*1: The FX3UC supports the FX3U-3A-ADP from firmware version 2.61 or later. *2: Firmware version 3.00 or later. *3: Production will be discontinued in September 2028.

Main unit production discontinuation / Sep. 2028

Special Function Modules*2

■ I/O Extension Modules




FX2N-48ER


Powered Extension Units

Input/Output Extension Units

FX2N-32ER-ES/UL
FX2N-32ET-ESS/UL
FX2N-48ER-DS
FX2N-48ER-ES/UL
FX2N-48ER-UA1/UL
FX2N-48ET-DSS
FX2N-48ET-ESS/UL



FX2N-8EX-ES



FX2N-16EYR

Unpowered Extension Blocks 6

Input Extension Blocks

FX2N-8EX-ES/UL
FX2N-8EX-UA1/UL
FX2N-16EX-ES/UL

Output Extension Blocks


FX2N-8EYR-ES/UL
FX2N-8EYT-ESS/UL
FX2N-16EYR-ES/UL
FX2N-16EYT-ESS/UL
FX2N-16EYS

Input/Output Extension Block

FX2N-8ER-ES/UL

■ Power Supply Unit

7




FX3U-1PSU-5V

Power Supply Unit


FX3U-1PSU-5V

■ Special Function Blocks

8



FX3U-20SSC-H



FX3U-64CCL

Analog
FX3U-4AD
FX3U-4DA


Positioning
FX3U-1PG
FX3U-20SSC-H

Network
FX3U-16CCL-M
FX3U-64CCL
FX3U-128ASL-M

Temperature
FX3U-4LC

High Speed Counter
FX3U-2HC


Accessories



FX3U-FLROM-64L

■ Memory Cassettes*2
FX3U-FLROM-16
FX3U-FLROM-64
FX3U-FLROM-64L
FX3U-FLROM-1M*3

■ Battery
FX3U-32BL



FX0N-65EC

■ Extension Cables*2
FX0N-30EC (30 cm)
FX0N-65EC (65 cm)

■ PLC Bus Connector*2
FX2N-CNV-BC


*3: Firmware version 3.00 or later.

Main unit production discontinuation / Sep. 2028


Special Function Modules*3, *4

■ I/O Extension Blocks

4



FX2NC-32EX




FX2NC-16EYR-T

Input Extension Blocks
FX2NC-16EX-T-DS
FX2NC-16EX-DS
FX2NC-32EX-DS

Output Extension Blocks
FX2NC-16EYR-T-DS
FX2NC-16EYT-DSS
FX2NC-32EYT-DSS


6




FX3UC-1PS-5V

Power Supply Unit
FX3UC-1PS-5V
OR
Interface Converter
FX2NC-CNV-IF

Unpowered Extension Blocks 7



FX2N-8EX-ES



FX2N-16EYR


Input Extension Blocks
FX2N-8EX-ES/UL
FX2N-8EX-UA1/UL
FX2N-16EX-ES/UL

Output Extension Blocks
FX2N-8EYR-ES/UL
FX2N-8EYT-ESS/UL
FX2N-16EYR-ES/UL
FX2N-16EYT-ESS/UL
FX2N-16EYS

Input/Output Extension Block
FX2N-8ER-ES/UL

■ Special Function Blocks


5




FX3UC-4AD

Analog
FX3UC-4AD


8



FX3U-4DA



FX3U-20SSC-H



FX3U-64CCL

Analog
FX3U-4AD
FX3U-4DA


Positioning
FX3U-1PG
FX3U-20SSC-H

Network
FX3U-16CCL-M
FX3U-64CCL
FX3U-128ASL-M

Temperature
FX3U-4LC

High Speed Counter
FX3U-2HC


■ Connector Parts
FX2C-I/O-CON
FX2C-I/O-CON-S
FX2C-I/O-CON-SA



FX-16E-TB

■ Terminal Blocks*5
FX-16E-TB
FX-16E-TB/UL
FX-16EYR-TB
FX-16EYR-ES-TB/UL
FX-16EYS-TB
FX-16EYS-ES-TB/UL
FX-16EYT-TB
FX-16EYT-ESS-TB/UL
FX-32E-TB
FX-32E-TB/UL

■ Battery
FX3U-32BL



FX0N-65EC

■ Extension Cables*3
FX0N-30EC (30 cm)
FX0N-65EC (65 cm)


■ PLC Bus Connector*3
FX2N-CNV-BC


■ Power Supply Cables
FX2NC-100MPCB (1 m)
FX2NC-100BPCB (1 m)
FX2NC-10BPCB1 (0.1 m)

*4: The special function Modules of FX3UC-****/DS(S)[]. *5: Discontinued Production in September 2026.


FX SERIES CONFIGURATION

FX3G

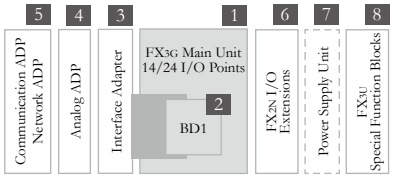

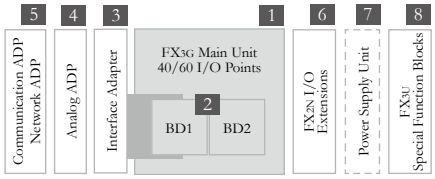

Special Adapters




5

FX3U-232ADP-MB FX3U-485ADP-MB

Communication

FX3U-232ADP-MB
FX3U-485ADP-MB



4


FX3U-4AD-ADP FX3U-4AD-PNK-ADP

Analog

FX3U-4AD-ADP
FX3U-4DA-ADP
FX3U-3A-ADP*1

Temperature

FX3U-4AD-PT-ADP
FX3U-4AD-TC-ADP
FX3U-4AD-PTW-ADP
FX3U-4AD-PNK-ADP




3

FX3G-CNV-ADP

Interface Adapter

FX3G-CNV-ADP*4

FX3G Main Units

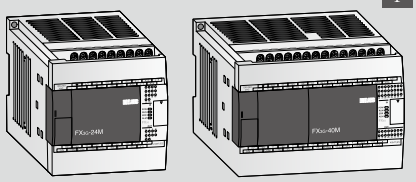

1


FX3G-24M FX3G-40M

■ FX3G Main Units 14-60 I/O

FX3G-14MR/ES(-A) AC D R	FX3G-40MR/ES(-A) AC D R
FX3G-14MT/ES(-A) AC D T1	FX3G-40MT/ES(-A) AC D T1
FX3G-14MT/ESS AC D T2	FX3G-40MT/ESS AC D T2
FX3G-14MR/DS DC D R	FX3G-40MR/DS DC D R
FX3G-14MT/DS DC D T1	FX3G-40MT/DS DC D T1
FX3G-14MT/DSS DC D T2	FX3G-40MT/DSS DC D T2
FX3G-24MR/ES(-A) AC D R	FX3G-60MR/ES(-A) AC D R
FX3G-24MT/ES(-A) AC D T1	FX3G-60MT/ES(-A) AC D T1
FX3G-24MT/ESS AC D T2	FX3G-60MT/ESS AC D T2
FX3G-24MR/DS DC D R	FX3G-60MR/DS DC D R
FX3G-24MT/DS DC D T1	FX3G-60MT/DS DC D T1
FX3G-24MT/DSS DC D T2	FX3G-60MT/DSS DC D T2

AC AC Power supply
DC DC Power supply
D DC Input (sink/source)
R Relay Output
T1 Transistor Output (sink)
T2 Transistor Output (source)

Optional Equipment and Software



GT25

■ GOT
GOT2000 (GT27/GT25/GT23/GT21)
GOT SIMPLE

■ Interface Converter
FX-232AWC-H

■ Software
GX Developer
GX Works2

Expansion Boards



FX3G-232-BD

2

Communication
FX3G-232-BD
FX3G-422-BD
FX3G-485-BD
FX3G-485-BD-RJ


Analog Setpoint
FX3G-8AV-BD*2

Analog
FX3G-2AD-BD*2
FX3G-1DA-BD*2


Input/Output
FX3G-4EX-BD*3
FX3G-2EYT-BD*3

∗1: Firmware version 1.20 or later. ∗2: Firmware version 1.10 or later. ∗3: Firmware version 2.20 or later. ∗4: Production will be discontinued in December 2026. ∗5: Production will be discontinued in September 2028.

FX3GC

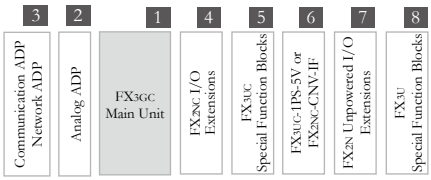

Special Adapters




3

FX3U-232ADP-MB FX3U-485ADP-MB

Communication

FX3U-232ADP-MB
FX3U-485ADP-MB



2

FX3U-4AD-ADP FX3U-4AD-PNK-ADP

Analog

FX3U-4AD-ADP
FX3U-4DA-ADP
FX3U-3A-ADP

Temperature

FX3U-4AD-PT-ADP
FX3U-4AD-TC-ADP
FX3U-4AD-PTW-ADP
FX3U-4AD-PNK-ADP

FX3GC Main Units



1

FX3GC-32M


■ FX3GC Main Units 32 I/O

FX3GC-32MT/D* DC D1 T1
FX3GC-32MT/DSS DC D2 T2

DC DC Power supply
D1 D1 DC input (sink)
D2 D2 DC input (sink, source)
T1 Transistor Output (sink)
T2 Transistor Output (source)

∗ Refer to the HARDWARE MANUAL for system configuration.

Optional Equipment and Software



GT25


■ GOT
GOT2000 (GT27/GT25/GT23/GT21)
GOT SIMPLE

■ Interface Converter
FX-232AWC-H

■ Software
GX Developer
GX Works2

Accessories

■ I/O Cables
General I/O cable
FX-16E-500CAB-S (5 m)




■ Connecting to Terminal Blocks*1
FX-16E-150CAB (1.5 m)
FX-16E-300CAB (3 m)
FX-16E-500CAB (5 m)

∗1: Discontinued Production in September 2026. ∗2: Production will be discontinued in September 2028.

Main unit production discontinuation Dec. 2026

Special Function Modules*5

■ I/O Extension Modules




FX2N-48ER

Powered Extension Units

Input/Output Extension Units

FX2N-32ER-ES/UL
FX2N-32ET-ESS/UL
FX2N-48ER-DS
FX2N-48ER-ES/UL
FX2N-48ER-UA1/UL
FX2N-48ET-DSS
FX2N-48ET-ESS/UL



FX2N-8EX-ES

Unpowered Extension Blocks 6

Input Extension Blocks

FX2N-8EX-ES/UL
FX2N-8EX-UA1/UL
FX2N-16EX-ES/UL


Output Extension Blocks

FX2N-8EYR-ES/UL
FX2N-8EYT-ESS/UL
FX2N-16EYR-ES/UL
FX2N-16EYT-ESS/UL
FX2N-16EYS

Input/Output Extension Block

FX2N-8ER-ES/UL

■ Power Supply Unit




FX3U-1PSU-5V

7

Power Supply Unit

FX3U-1PSU-5V

■ Special Function Blocks



FX3U-4DA

8

Analog

FX3U-4AD
FX3U-4DA


Temperature

FX3U-4LC

Network


FX3U-16CCL-M
FX3U-64CCL
FX3U-128ASL-M

Accessories



FX3G-EEPROM-32L

■ Memory Cassette
FX3G-EEPROM-32L



FX0N-65EC

■ Extension Cables*5
FX0N-30EC (30 cm)
FX0N-65EC (65 cm)


■ PLC Bus Connector*5
FX2N-CNV-BC

■ Battery
FX3U-32BL


Main unit production discontinuation Dec. 2026

Special Function Modules*2

■ I/O Extension Blocks



FX2NC-32EX



FX2NC-16EYR-T


4

Input Extension Blocks

FX2NC-16EX-T-DS
FX2NC-16EX-DS
FX2NC-32EX-DS

Output Extension Blocks

FX2NC-16EYR-T-DS
FX2NC-16EYT-DSS
FX2NC-32EYT-DSS



FX3UC-1PS-5V

6


Power Supply Unit

FX3UC-1PS-5V

OR

Interface Converter

FX2NC-CNV-IF



FX2N-8EX-ES

Unpowered Extension Blocks 7

Input Extension Blocks

FX2N-8EX-ES/UL
FX2N-8EX-UA1/UL
FX2N-16EX-ES/UL


Output Extension Blocks

FX2N-8EYR-ES/UL
FX2N-8EYT-ESS/UL
FX2N-16EYR-ES/UL
FX2N-16EYT-ESS/UL
FX2N-16EYS

Input/Output Extension Blocks

FX2N-8ER-ES/UL

■ Special Function Blocks




FX3UC-4AD

5

Analog

FX3UC-4AD



FX3U-4DA

8

Analog

FX3U-4AD
FX3U-4DA


Temperature

FX3U-4LC

Network

FX3U-16CCL-M
FX3U-64CCL
FX3U-128ASL-M


■ Connector Parts
FX2C-I/O-CON
FX2C-I/O-CON-S
FX2C-I/O-CON-SA



FX-16E-TB

■ Terminal Blocks*1
FX-16E-TB
FX-16E-TB/UL
FX-16EYR-TB
FX-16EYR-ES-TB/UL
FX-16EYS-TB
FX-16EYS-ES-TB/UL
FX-16EYT-TB
FX-16EYT-ESS-TB/UL
FX-32E-TB
FX-32E-TB/UL

■ Battery
FX3U-32BL



FX0N-65EC


■ Extension Cables*1
FX0N-30EC (30 cm)
FX0N-65EC (65 cm)

■ PLC Bus Connector*1
FX2N-CNV-BC

■ Power Supply Cables
FX2NC-100MPCB (1 m)
FX2NC-100BPCB (1 m)
FX2NC-10BPCB1 (0.1 m)


FX SERIES CONFIGURATION

FX3S



Special Adapters

5



FX3U-232ADP-MB

Communication

FX3U-232ADP-MB
FX3U-485ADP-MB

4



FX3U-4AD-ADP

Analog

FX3U-4AD-ADP
FX3U-4DA-ADP
FX3U-3A-ADP




FX3U-4AD-PNK-ADP

Temperature

FX3U-4AD-PT-ADP
FX3U-4AD-TC-ADP
FX3U-4AD-PTW-ADP
FX3U-4AD-PNK-ADP

3




FX3S-CNV-ADP

Interface Adapter

FX3S-CNV-ADP

Optional Equipment and Software



GT25

■ **GOT**
GOT2000 (GT27/GT25/GT23/GT21)
GOT SIMPLE

■ **Interface Converter**
FX-232AWC-H

■ **Software**
GX Works2

Expansion Boards

2



FX3G-232-BD

Communication

FX3G-232-BD
FX3G-422-BD
FX3G-485-BD
FX3G-485-BD-RJ

Analog Setpoint

FX3G-8AV-BD

Analog

FX3G-2AD-BD
FX3G-1DA-BD


Input/Output

FX3G-4EX-BD*1
FX3G-2EYT-BD*1

*1: Firmware version 1.10 or later.

FX3S Main Units

1



FX3S-10M

■ FX3S Main Units 10-30 I/O

FX3S-10MR/ES	AC D R	FX3S-14MR/ES	AC D R	FX3S-20MR/ES	AC D R	FX3S-30MR/ES	AC D R
FX3S-10MT/ES	AC D T1	FX3S-14MT/ES	AC D T1	FX3S-20MT/ES	AC D T1	FX3S-30MT/ES	AC D T1
FX3S-10MT/ESS	AC D T2	FX3S-14MT/ESS	AC D T2	FX3S-20MT/ESS	AC D T2	FX3S-30MT/ESS	AC D T2
FX3S-10MR/DS	DC D R	FX3S-14MR/DS	DC D R	FX3S-20MR/DS	DC D R	FX3S-30MR/DS	DC D R
FX3S-10MT/DS	DC D T1	FX3S-14MT/DS	DC D T1	FX3S-20MT/DS	DC D T1	FX3S-30MT/DS	DC D T1
FX3S-10MT/DSS	DC D T2	FX3S-14MT/DSS	DC D T2	FX3S-20MT/DSS	DC D T2	FX3S-30MT/DSS	DC D T2

■ FX3S Main Units 30 I/O and Analog Inputs

FX3S-30MR/ES-2AD	AC D R
FX3S-30MT/ES-2AD	AC D T1
FX3S-30MT/ESS-2AD	AC D T2

AC	AC Power supply	R	Relay output
DC	DC Power supply	T1	Transistor Output (sink)
D	DC Input (sink/source)	T2	Transistor Output (source)

Accessories

■ Memory Cassette

FX3G-EEPROM-32L



FX3G-EEPROM-32L

Programming Specifications

Programming

System specifications		FX3S	FX3G/FX3GC	FX3U/FX3UC
I/O points		30 total	256 total (combined local and CC-Link or AnyWireASLINK remote I/O)	384 total (combined local and CC-Link or AnyWireASLINK remote I/O)
Address range		Max. 30 direct addressing	Max. 128 direct addressing and Max. 128 remote I/O	Max. 256 direct addressing and Max. 256 remote I/O
Program memory		16,000 steps EEPROM (Program capacity is 4,000 steps.)	32,000 steps EEPROM (internal), exchangeable EEPROM memory cassette*	64,000 steps RAM (internal), exchangeable FLROM memory cassette
Instruction Time	Basic instructions	0.21 µs/instruction	0.21 µs/instruction (Standard mode), 0.42 µs/instruction (Extension mode)	0.21 µs/instruction
	Applied instructions	0.5 µs to several hundred µs/instruction	0.5 µs to several hundred µs/instruction (Standard mode), 1.2 µs to several hundred µs/instruction	0.5 µs to several hundred µs/instruction
Number of instructions		29 sequence instructions, 2 step ladder instructions, 116 applied instructions	29 sequence instructions, 2 step ladder instructions, 125 applied instructions	29 sequence instructions, 2 step ladder instructions, 218 applied instructions
Programming language	Simple project	Ladder, SFC, ST (Structured Text)		
	Structured project	Structured Ladder/FBD, SFC, ST		
Program execution		Cyclical execution, refresh mode processing		
Program protection		2 different keywords, Max password length 16 characters		

*: Not for FX3GC

Devices

System specifications	FX3S	FX3G/FX3GC	FX3U/FX3UC
Auxiliary relays	1,536 total, with 1,408 general (M0 - M383 and M512 - M1535) and 128 EEPROM latched (M384 - M511)	7,680 total, with 384 general (M0 - M383), 1,152 EEPROM latched (M384 - M1535), and 6,144 general/optional latched (M1536 - M7679)	7,680 total, with 500 general (M0 - M499), 524 optional latched (M500 - M1023), and 6,656 latched (M1024 - M7679)
Special auxiliary relays	512 (M8000 - M8511)		
State relays	256 total, with 128 EEPROM latched (S0 - S127) and 128 general (S128 - S255)	4,096 total, with 1,000 EEPROM latched (S0 - S999) and 3,096 general/optional latched (S1000 - S4095)	4,096 total, with 1,000 optional latched (S0 - S999) and 3,096 latched (S1000 - S4095)
Timers	169 total, with 69 100 ms (T0 - T62 and T132 - T137), 31 100/10 ms (T32 - T62), and 69 1 ms (T63 - T131)	320 total, with 206 100 ms (T0 - T199 and T250 - T255), 46 10 ms (T200 - T245), and 68 1 ms (T246 - T249 and T256 - T319)	512 total, with 206 100 ms (T0 - T191, T192 - T199 and T250 - T255), 46 10 ms (T200 - T245), and 260 1 ms (T246 - T249 and T256 - T511)
External setpoint entry via potentiometer	2*		—
Counters	67 total (16 bit and 32 bit), with 51 general (C0 - C15 and C200 - C234) and 16 EEPROM latched (C16 - C31)	235 total (16 bit and 32 bit), with 36 general (C0 - C15 and C200 - C219) and 199 EEPROM latched (C16 - C199 and C220 - C234)	235 total (16 bit and 32 bit), with 120 general (C0 - C99 and C200 - C219) and 115 latched (C100 - C199 and C220 - C234)
High-speed counters	21 total, with 16 1-phase (C235 - C250) and 5 2-phase (C251 - C255)		
High-speed counter speed	1-phase, 6 points max: 60 kHz/2 points, 10 kHz/4 points 2-phase, 2 points max: 30 kHz/1 point, 5 kHz/1 point	1-phase, 6 points max: 60 kHz/4 points, 10 kHz/2 points 2-phase, 3 points max: 30 kHz/2 points, 5 kHz/1 point	1-phase, 8 points max: 100 kHz/6 points 10 kHz /2 points 2-phase, 2 points max: 50 kHz/2 points
Real-time clock	Year, month, day, hour, minute, second, day of the week		
Data registers	3,000 total, with 2,872 general (D0 - D127 and D256 - D2999) and 128 EEPROM latched (D128 - D255)	8,000 total, with 128 general (D0 - D127), 972 EEPROM latched (D128 - D1099), and 6,900 general/optional latched (D1100 - D7999)	8,000 total, with 200 general (D0 - D199), 312 optional latched (D200 - D511), and 7,488 latched (D512 - D7999)
Extension registers	—	24,000 (R0 - R23999)	32,768 (R0 - R32767)
Extension file registers	—	24,000 (ER0 - R23999) internal/optional memory*	32,768 (ER0 - R32767) optional memory
Index registers	16		
Special data registers	512 (D8000 - D8511)		
Pointers	256	2,048	4,096
Nestings	8		
Interrupt inputs	6		
Constants	16 bit: K: -32,768 to +32,767; H: 0 to FFFF; 32 bit: K: -2,147,483,648 to +2,147,483,647; H: 0 to FFFF FFFF; E: -1.0×2^{128} to -1.0×2^{-126}, 0 , 1.0×2^{-126} to 1.0×2^{128} Decimal-point and exponential notations are possible.		

*: Not for FX3GC

MEMO

FNC No.	Mnemonic	Function	Applicable PLC FX3S	FX3G/FX3GC	FX3U/FX3UC
Program Flow					
0	CJ	Conditional Jump	●	●	●
1	CALL	Call Subroutine	●	●	●
2	SRET	Subroutine Return	●	●	●
3	IRET	Interrupt Return	●	●	●
4	EI	Enable Interrupt	●	●	●
5	DI	Disable Interrupt	●	●	●
6	FEND	Main Routine Program End	●	●	●
7	WDT	Watchdog Timer Refresh	●	●	●
8	FOR	Start a FOR/NEXT Loop	●	●	●
9	NEXT	End a FOR/NEXT Loop	●	●	●
Move and Compare					
10	CMP	Compare	●	●	●
11	ZCP	Zone Compare	●	●	●
12	MOV	Move	●	●	●
13	SMOV	Shift Move	●	●	●
14	CML	Complement	●	●	●
15	BMOV	Block Move	●	●	●
16	FMOV	Fill Move	●	●	●
17	XCH	Exchange	—	—	●
18	BCD	Conversion to Binary Coded Decimal	●	●	●
19	BIN	Conversion to Binary	●	●	●
Arithmetic and Logical Operation (+, −, ×, ÷)					
20	ADD	Addition	●	●	●
21	SUB	Subtraction	●	●	●
22	MUL	Multiplication	●	●	●
23	DIV	Division	●	●	●
24	INC	Increment	●	●	●
25	DEC	Decrement	●	●	●
26	WAND	Logical Word AND	●	●	●
27	WOR	Logical Word OR	●	●	●
28	WXOR	Logical Exclusive OR	●	●	●
29	NEG	Negation	—	—	●
Rotation and Shift Operation					
30	ROR	Rotation Right	●	●	●
31	ROL	Rotation Left	●	●	●
32	RCR	Rotation Right with Carry	—	—	●
33	RCL	Rotation Left with Carry	—	—	●
34	SFTR	Bit Shift Right	●	●	●
35	SFTL	Bit Shift Left	●	●	●
36	WSFR	Word Shift Right	●	●	●
37	WSFL	Word Shift Left	●	●	●
38	SFWR	Shift Write [FIFO/FILO Control]	●	●	●
39	SFRD	Shift Read [FIFO Control]	●	●	●
Data Operation					
40	ZRST	Zone Reset	●	●	●
41	DECO	Decode	●	●	●
42	ENCO	Encode	●	●	●
43	SUM	Sum of Active Bits	●	●	●
44	BON	Check Specified Bit Status	●	●	●

FNC No.	Mnemonic	Function	Applicable PLC FX3S	FX3G/FX3GC	FX3U/FX3UC
45	MEAN	Mean	●	●	●
46	ANS	Timed Annunciator Set	—	●	●
47	ANR	Annunciator Reset	—	●	●
48	SQR	Square Root	—	—	●
49	FLT	Conversion to Floating Point	●	●	●
High-Speed Processing					
50	REF	Refresh	●	●	●
51	REFF	Refresh and Filter Adjust	—	—	●
52	MTR	Input Matrix	●	●	●
53	HSCS	High-Speed Counter Set	●	●	●
54	HSCR	High-Speed Counter Reset	●	●	●
55	HSZ	High-Speed Counter Zone Compare	●	●	●
56	SPD	Speed Detection	●	●	●
57	PLSY	Pulse Y Output	●	●	●
58	PWM	Pulse Width Modulation	●	●	●
59	PLSR	Acceleration/Deceleration Setup	●	●	●
Handy Instruction					
60	IST	Initial State	●	●	●
61	SER	Search a Data Stack	●	●	●
62	ABSD	Absolute Drum Sequencer	●	●	●
63	INCD	Incremental Drum Sequencer	●	●	●
64	TTMR	Teaching Timer	—	—	●
65	STMR	Special Timer	—	—	●
66	ALT	Alternate State	●	●	●
67	RAMP	Ramp Variable Value	●	●	●
68	ROTC	Rotary Table Control	—	—	●
69	SORT	Sort Tabulated Data	—	—	●
External FX I/O Device					
70	TKY	Ten Key Input	—	—	●
71	HKY	Hexadecimal Input	—	—	●
72	DSW	Digital Switch (Thumbwheel Input)	●	●	●
73	SEGD	Seven Segment Decoder	—	—	●
74	SEGL	Seven Segment With Latch	●	●	●
75	ARWS	Arrow Switch	—	—	●
76	ASC	ASCII Code Data Input	—	—	●
77	PR	Print (ASCII Code)	—	—	●
78	FROM	Read From a Special Function Block	—	●	●
79	TO	Write To a Special Function Block	—	●	●
External FX Device					
80	RS	Serial Communication	●	●	●
81	PRUN	Parallel Run (Octal Mode)	●	●	●
82	ASCI	Hexadecimal to ASCII Conversion	●	●	●
83	HEX	ASCII to Hexadecimal Conversion	●	●	●
84	CCD	Check Code	●	●	●
85	VRRD	Volume Read	●	●*	●
86	VRSC	Volume Scale	●	●*	●
87	RS2	Serial Communication 2	●	●	●
88	PID	PID Control Loop	●	●	●

*: Not for FX3GC

FNC No.	Mnemonic	Function	Applicable PLC FX3S	FX3G/FX3GC	FX3U/FX3UC
Data Transfer 2					
102	ZPUSH	Batch Store of Index Register	—	—	●
103	ZPOP	Batch POP of Index Register	—	—	●
Floating Point					
110	ECMP	Floating Point Compare	●	●	●
111	EZCP	Floating Point Zone Compare	—	—	●
112	EMOV	Floating Point Move	●	●	●
116	ESTR	Floating Point to Character String Conversion	—	—	●
117	EVAL	Character String to Floating Point Conversion	—	—	●
118	EBCD	Floating Point to Scientific Notation Conversion	—	—	●
119	EBIN	Scientific Notation to Floating Point Conversion	—	—	●
120	EADD	Floating Point Addition	●	●	●
121	ESUB	Floating Point Subtraction	●	●	●
122	EMUL	Floating Point Multiplication	●	●	●
123	EDIV	Floating Point Division	●	●	●
124	EXP	Floating Point Exponent	—	—	●
125	LOGE	Floating Point Natural Logarithm	—	—	●
126	LOG10	Floating Point Common Logarithm	—	—	●
127	ESQR	Floating Point Square Root	●	●	●
128	ENEG	Floating Point Negation	—	—	●
129	INT	Floating Point to Integer Conversion	●	●	●
130	SIN	Floating Point Sine	—	—	●
131	COS	Floating Point Cosine	—	—	●
132	TAN	Floating Point Tangent	—	—	●
133	ASIN	Floating Point Arc Sine	—	—	●
134	ACOS	Floating Point Arc Cosine	—	—	●
135	ATAN	Floating Point Arc Tangent	—	—	●
136	RAD	Floating Point Degrees to Radian Conversion	—	—	●
137	DEG	Floating Point Radian to Degrees Conversion	—	—	●
Data Operation 2					
140	WSUM	Sum of Word Data	—	—	●
141	WTOB	WORD to BYTE	—	—	●
142	BTOW	BYTE to WORD	—	—	●
143	UNI	4-bit Linking of Word Data	—	—	●
144	DIS	4-bit Grouping of Word Data	—	—	●
147	SWAP	Byte Swap	—	—	●
149	SORT2	Sort Tabulated Data 2	—	—	●
Positioning Control					
150	DSZR	DOG Search Zero Return	●	●	●
151	DVIT	Interrupt Positioning	—	—	●
152	TBL	Batch Data Positioning Mode	—	●	●
155	ABS	Absolute Current Value Read	●	●	●
156	ZRN	Zero Return	●	●	●
157	PLSV	Variable Speed Pulse Output	●	●	●
158	DRVI	Drive to Increment	●	●	●
159	DRVA	Drive to Absolute	●	●	●

FNC No.	Mnemonic	Function	Applicable PLC FX3S	FX3G/FX3GC	FX3U/FX3UC
Real Time Clock Control					
160	TCMP	RTC Data Compare	●	●	●
161	TZCP	RTC Data Zone Compare	●	●	●
162	TADD	RTC Data Addition	●	●	●
163	TSUB	RTC Data Subtraction	●	●	●
164	HTOS	Hour to Second Conversion	—	—	●
165	STOH	Second to Hour Conversion	—	—	●
166	TRD	Read RTC Data	●	●	●
167	TWR	Set RTC Data	●	●	●
169	HOUR	Hour Meter	●	●	●
External Device					
170	GRY	Decimal to Gray Code Conversion	●	●	●
171	GBIN	Gray Code to Decimal Conversion	●	●	●
176	RD3A	Read form Dedicated Analog Block	—	●	●
177	WR3A	Write to Dedicated Analog Block	—	●	●
Other					
182	COMRD	Read Device Comment Data	—	—	●
184	RND	Random Number Generation	—	—	●
186	DUTY	Timing Pulse Generation	—	—	●
188	CRC	Cyclic Redundancy Check	—	—	●
189	HCMOV	High-Speed Counter Move	—	—	●
Block Data Operation					
192	BK+	Block Data Addition	—	—	●
193	BK-	Block Data Subtraction	—	—	●
194	BKCMP=	Block Data Compare (S1) = (S2)	—	—	●
195	BKCMP>	Block Data Compare (S1) > (S2)	—	—	●
196	BKCMP<	Block Data Compare (S1) < (S2)	—	—	●
197	BKCMP< >	Block Data Compare (S1) ≠ (S2)	—	—	●
198	BKCMP<=	Block Data Compare (S1) ≤ (S2)	—	—	●
199	BKCMP>=	Block Data Compare (S1) ≥ (S2)	—	—	●
Character String Control					
200	STR	BIN to Character String Conversion	—	—	●
201	VAL	Character String to BIN Conversion	—	—	●
202	$+	Link Character Strings	—	—	●
203	LEN	Character String Length Detection	—	—	●
204	RIGHT	Extracting Character String Data From the Right	—	—	●
205	LEFT	Extracting Character String Data from the Left	—	—	●
206	MIDR	Random Selection of Character Strings	—	—	●
207	MIDW	Random Replacement of Character Strings	—	—	●
208	INSTR	Character String Search	—	—	●
209	$MOV	Character String Transfer	—	—	●
Data Operation 3					
210	FDEL	Deleting Data from Tables	—	—	●
211	FINS	Inserting Data to Tables	—	—	●
212	POP	Shift Last Data Read [FILO Control]	—	—	●
213	SFR	Bit Shift Right with Carry	—	—	●
214	SFL	Bit Shift Left with Carry	—	—	●

FNC No.	Mnemonic	Function	Applicable PLC FX3S	FX3G/FX3GC	FX3U/FX3UC
Data Comparison					
224	LD=	Load Compare (S1)=(S2)	●	●	●
225	LD>	Load Compare (S1)>(S2)	●	●	●
226	LD<	Load Compare (S1)<(S2)	●	●	●
228	LD<>	Load Compare (S1)≠(S2)	●	●	●
229	LD<=	Load Compare (S1)≤(S2)	●	●	●
230	LD>=	Load Compare (S1)≥(S2)	●	●	●
232	AND=	AND Compare (S1)=(S2)	●	●	●
233	AND>	AND Compare (S1)>(S2)	●	●	●
234	AND<	AND Compare (S1)<(S2)	●	●	●
236	AND<>	AND Compare (S1)≠(S2)	●	●	●
237	AND<=	AND Compare (S1)≤(S2)	●	●	●
238	AND>=	AND Compare (S1)≥(S2)	●	●	●
240	OR=	OR Compare (S1)=(S2)	●	●	●
241	OR>	OR Compare (S1)>(S2)	●	●	●
242	OR<	OR Compare (S1)<(S2)	●	●	●
244	OR<>	OR Compare (S1)≠(S2)	●	●	●
245	OR<=	OR Compare (S1)≤(S2)	●	●	●
246	OR>=	OR Compare (S1)≥(S2)	●	●	●
Data Table Operation					
256	LIMIT	Limit Control	—	—	●
257	BAND	Dead Band Control	—	—	●
258	ZONE	Zone Control	—	—	●
259	SCL	Scaling (Coordinate by Point Data)	—	—	●
260	DABIN	Decimal ASCII to BIN Conversion	—	—	●
261	BINDA	BIN to Decimal ASCII Conversion	—	—	●
269	SCL2	Scaling 2 (Coordinate by X/Y Data)	—	—	●
External Device Communication (Inverter Communication)					
270	IVCK	Inverter Status Check	●	●	●
271	IVDR	Inverter Drive	●	●	●
272	IVRD	Inverter Parameter Read	●	●	●
273	IVWR	Inverter Parameter Write	●	●	●
274	IVBWR	Inverter Parameter Block Write	—	—	●
275	IVMC	Inverter Multi Command	●	●	●
Data Transfer 3					
276	ADPRW	MODBUS Read/Write	●	●	●
278	RBFM	Divided BFM Read	—	—	●
279	WBFM	Divided BFM Write	—	—	●
High-Speed Processing 2					
280	HSCT	High-Speed Counter Compare With Data Table	—	—	●
Extension File Register Control					
290	LOADR	Load From ER	—	●	●
291	SAVER	Save to ER	—	—	●
292	INITR	Initialize R and ER	—	—	●
293	LOGR	Logging R and ER	—	—	●
294	RWER	Rewrite to ER	—	●	●
295	INITER	Initialize ER	—	—	●

FNC No.	Mnemonic	Function	Applicable PLC FX3S	FX3G/FX3GC	FX3U/FX3UC
Data Logging					
300	FLCRT	File Create/Check	—	—	●
301	FLDEL	File Delete/CF Card Format	—	—	●
302	FLWR	Data Write	—	—	●
303	FLRD	Data Read	—	—	●
304	FLCMD	FX3U-CF-ADP Command	—	—	●
305	FLSTRD	FX3U-CF-ADP Status Read	—	—	●

Environmental Specifications

General specifications	FX3S	FX3G	FX3GC	FX3U	FX3UC
Ambient temperature	0 – 55 °C (storage temperature: -25 – +75 °C)				
Noise durability	1000 Vpp with noise generator; 1 µs at 30 – 100 Hz				
Dielectric withstand voltage	AC PSU: 1500 V AC, 1 min. / DC PSU: 500 V AC, 1 min.		500 V AC, 1 min.	AC PSU: 1500 V AC, 1 min. / DC PSU: 500 V AC, 1 min.	500 V AC, 1 min.
Ambient relative humidity	5 – 95% (non-condensing)				
Vibration resistance*					
Shock resistance*	147 m/s² Acceleration, Action time: 11ms, 3 times by half-sine pulse in each direction X, Y, and Z				
Insulation resistance	500 V DC, 5 MΩ				
Ground	Class D: Grounding resistance 100 Ω or less				
Fuse	AC models: 250 V 1 A DC models: 250 V 1.6 A	AC models: 250 V 1 A (FX3G-14/24M), 250 V 3.15 A (FX3G-40/60M) DC models: 125 V 2.5 A (FX3G-14/24M), 125 V 3.15 A (FX3G-40/60M)	125 V 3.15 A	From FX3U-16M[] to FX3U-32M[] and FX3U-32MR/UA1: 250 V 3.15 A; From FX3U-48M[] to FX3U-128M[] and FX3U-64MR/UA1: 250 V 5 A	125 V 3.15 A
Environment	Avoid environments containing corrosive gases, install in a dust-free location.				
Certifications	Please refer to the Certifications page in this catalog.				

	Frequency (Hz)	Acceleration (m/s²)	Half amplitude (mm)	
When installed on DIN rail	10 to 57	—	0.035	Sweep Count for X, Y, Z: 10 times (80 min in each direction)
	57 to 150	4.9	—	
When installed directly	10 to 57	—	0.075	
	57 to 150	9.8	—	

* The criterion is shown IEC 61131-2.

Electrical Specifications

Power Supply Specifications	FX3S AC Powered Models (FX3S-[]M[]/ES/ESS/E[]-2AD)	 DC Powered Modules (FX3S-[]M[]/DS/DSS)	FX3G AC Powered Models (FX3G-[]M[]/ES/ESS)	 DC Powered Models (FX3G-[]M[]/DS/DSS)
Power supply	100–240 V AC (+10 %/-15 %), 50/60 Hz (±10 %)	24 V DC (+20%/-15%)	100–240 V AC (+10 %/-15 %), 50/60 Hz	24 V DC (+20%/-15 %)
Inrush current at ON	15 A/5 ms (at 100 V AC); 28 A/5 ms (at 200 V AC)	20 A/< 1 ms (at 24 V DC)	30 A/< 5 ms (at 100 V AC); 50 A/< 5 ms (at 200 V AC)	30 A/< 1 ms (at 24 V DC)
Allowable momentary power failure time	10 ms	5 ms	10 ms	5 ms
24 V DC service power supply	400 mA	—	400 mA	—

Power Supply Specifications	FX3GC DC Powered Models (FX3GC-[]M[]/D/DSS)	FX3U AC Powered Models (FX3U-[]M[]/ES/ESS)	 DC Powered Models (FX3U-[]M[]/DS/DSS)	FX3UC DC Powered Models (FX3UC-[]M[]/D/DSS/D[]-T)
Power supply	24 V DC (+20%/-15 %)	100–240 V AC (+10%/-15%), 50/60 Hz	24 V DC (+20%/-30%)	24 V DC (+20% /-15%) Ripple Voltage (p-p)5% or less
Inrush current at ON	35 A/< 0.5 ms (at 24 V DC)	30 A/< 5 ms (at 100 V AC); 65 A/< 5 ms (at 200 V AC)	35 A/< 0.5 ms (at 24 V DC)	35 A/< 0.5 ms (at 24 V DC)
Allowable momentary power failure time	5 ms	10 ms*	5 ms	5 ms
24 V DC service power supply	—	FX3U-16/32M[]/ES: 400 mA/ FX3U-48/64/80/128M[]/ES: 600 mA	—	—

* When the supply voltage is 200 V AC, the time can be changed to 10 to 100 ms by editing the user program.

ENVIRONMENTAL & ELECTRICAL SPECIFICATIONS

Output Specifications			FX3S		FX3G		FX3GC
			Relay Models	Transistor Models	Relay Models	Transistor Models	Transistor Models
Switching voltage (Max.)		V	< 240 V AC, < 30 V DC	5–30 V DC	< 240 V AC, < 30 V DC	5–30 V DC	5–30 V DC
Max. output current	- per output	A	2	0.5	2	0.5	0.3 A (Y0–Y1), and 0.1 A (Y2 or higher)
	- per group*1	A	8	0.8	8	0.8	0.8
Max. switching current	- inductive load		80 VA	12 W	80 VA	12 W	38.4 W (7.2 W per point for Y0–Y1 and 2.4 W per point for Y2 or higher)
Response time		ms	10	< 0.2 (< 5 µs for Y0,Y1)	10	< 0.2 (< 5 µs for Y0,Y1)*4	< 0.2 (< 5 µs for Y0–Y1)
Life of contacts (switching times)			3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA*2	—	3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA*2	—	—*3

Output Specifications			FX3U			FX3UC	
			Relay Models	Transistor Models	Triac Modules	Relay Models	Transistor Models
Switching voltage (Max.)		V	< 240 V AC, < 30 V DC	5–30 V DC	85–242 V AC	< 240 V AC, < 30 V DC	5–30 V DC
Max. output current	- per output	A	2	0.5	0.3	2	0.3 A (Y0–Y3), and 0.1 A (Y4 or higher)
	- per group*1	A	8	0.8	0.8	8	0.8
Max. switching current	- inductive load		80 VA	12 W	15 VA/100 V AC 30 VA/200 V AC	80 VA	38.4 W (7.2 W per point for Y0–Y3 and 2.4 W per point for Y4 or higher)
Response time		ms	10	< 0.2 (< 5 µs for Y0–Y2)	< 10	10	< 0.2 (< 5 µs for Y0–Y2)
Life of contacts (switching times)			3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA*2	—	—	3,000,000 at 20 VA; 1,000,000 at 35 VA; 200,000 at 80 VA*2	—*3

*1 This limitation applies to the maximum output current for each reference terminal (Common), each serving 1 to 4 relay, transistor or triac outputs. Please observe the reference terminal assignments for group identification.

*2 Not guaranteed by Mitsubishi Electric. *3 Refer to the specifications of the Terminal Block being used. *4 The 40 and 60 I/O point main units supports 5 µs for Y2.

FX3U

Production will be discontinued in Sep. 2028.

Main Units with 16 I/O

Specifications		FX3U-16MR/DS	FX3U-16MR/ES(-A)	FX3U-16MT/DSS	FX3U-16MT/DS	FX3U-16MT/ESS	FX3U-16MT/ES(-A)
Integrated inputs/outputs		16	16	16	16	16	16
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		8	8	8	8	8	8
Integrated outputs		8	8	8	8	8	8
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC
Power consumption	W	25	30	25	25	30	30
Weight	kg	0.60	0.60	0.60	0.60	0.60	0.60
Dimensions (W x H x D)	mm	130 x 90 x 86	130 x 90 x 86	130 x 90 x 86	130 x 90 x 86	130 x 90 x 86	130 x 90 x 86

Main Units with 32 I/O

Specifications		FX3U-32MR/DS	FX3U-32MR/ES(-A)	FX3U-32MT/DSS	FX3U-32MT/DS	FX3U-32MT/ESS	FX3U-32MT/ES(-A)	FX3U-32MS/ES	FX3U-32MR/UA1
Integrated inputs/outputs		32	32	32	32	32	32	32	32
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source	sink/source	AC input
Integrated inputs		16	16	16	16	16	16	16	16
Integrated outputs		16	16	16	16	16	16	16	16
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)	Triac	Relay
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC	100–240 V AC	100–240 V AC
Power consumption	W	30	35	30	30	35	35	35	35
Weight	kg	0.65	0.65	0.65	0.65	0.65	0.65	0.65	0.85
Dimensions (W x H x D)	mm	150 x 90 x 86	150 x 90 x 86	150 x 90 x 86	150 x 90 x 86	150 x 90 x 86	150 x 90 x 86	150 x 90 x 86	182 x 90 x 86

Main Units with 48 I/O

Specifications		FX3U-48MR/DS	FX3U-48MR/ES(-A)	FX3U-48MT/DSS	FX3U-48MT/DS	FX3U-48MT/ESS	FX3U-48MT/ES(-A)
Integrated inputs/outputs		48	48	48	48	48	48
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		24	24	24	24	24	24
Integrated outputs		24	24	24	24	24	24
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC
Power consumption	W	35	40	35	35	40	40
Weight	kg	0.85	0.85	0.85	0.85	0.85	0.85
Dimensions (W x H x D)	mm	182 x 90 x 86	182 x 90 x 86	182 x 90 x 86	182 x 90 x 86	182 x 90 x 86	182 x 90 x 86

Main Units with 64 I/O

Specifications		FX3U-64MR/DS	FX3U-64MR/ES(-A)	FX3U-64MT/DSS	FX3U-64MT/DS	FX3U-64MT/ESS	FX3U-64MT/ES(-A)	FX3U-64MS/ES	FX3U-64MR/UA1
Integrated inputs/outputs		64	64	64	64	64	64	64	64
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source	sink/source	AC input
Integrated inputs		32	32	32	32	32	32	32	32
Integrated outputs		32	32	32	32	32	32	32	32
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)	Triac	Relay
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC	100–240 V AC	100–240 V AC
Power consumption	W	40	45	40	40	45	45	45	45
Weight	kg	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.20
Dimensions (W x H x D)	mm	220 x 90 x 86	220 x 90 x 86	220 x 90 x 86	220 x 90 x 86	220 x 90 x 86	220 x 90 x 86	220 x 90 x 86	285 x 90 x 86

FX MAIN UNITS SPECIFICATIONS

Main Units with 80 I/0

Specifications		FX3U-80MR/DS	FX3U-80MR/ES	FX3U-80MT/DSS	FX3U-80MT/DS	FX3U-80MT/ESS	FX3U-80MT/ES
Integrated inputs/outputs		80	80	80	80	80	80
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		40	40	40	40	40	40
Integrated outputs		40	40	40	40	40	40
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC
Power consumption	W	45	50	45	45	50	50
Weight	kg	1.20	1.20	1.20	1.20	1.20	1.20
Dimensions (W x H x D)	mm	285 x 90 x 86	285 x 90 x 86	285 x 90 x 86	285 x 90 x 86	285 x 90 x 86	285 x 90 x 86

Main Units with 128 I/0

Specifications		FX3U-128MR/ES	FX3U-128MT/ESS	FX3U-128MT/ES
Integrated inputs/outputs		128	128	128
Input type		sink/source	sink/source	sink/source
Integrated inputs		64	64	64
Integrated outputs		64	64	64
Output type		Relay	Transistor (source)	Transistor (sink)
Power supply		100–240 V AC	100–240 V AC	100–240 V AC
Power consumption	W	65	65	65
Weight	kg	1.80	1.80	1.80
Dimensions (W x H x D)	mm	350 x 90 x 86	350 x 90 x 86	350 x 90 x 86

FX3UC

Production will be discontinued in Sep. 2028.

Main Units with 16 – 96 I/0

Specifications		FX3UC-16MR/D-T	FX3UC-16MR/DS-T	FX3UC-16MT/D	FX3UC-16MT/DSS	FX3UC-32MT/D	FX3UC-32MT/DSS
Integrated inputs/outputs		16	16	16	16	32	32
Integrated inputs		8	8	8	8	16	16
Input type		Sink	Sink/Source	Sink	Sink/Source	Sink	Sink/Source
Integrated outputs		8	8	8	8	16	16
Output type		Relay	Relay	Transistor (sink)	Transistor (source)	Transistor (sink)	Transistor (source)
Power supply		24 V DC	24 V DC	24 V DC	24 V DC	24 V DC	24 V DC
Power consumption	W	6	6	6	6	8	8
Weight	kg	0.25	0.25	0.2	0.2	0.2	0.2
Dimensions (W x H x D)	mm	34 x 90 x 89	34 x 90 x 89	34 x 90 x 74	34 x 90 x 74	34 x 90 x 74	34 x 90 x 74

Specifications		FX3UC-64MT/D	FX3UC-64MT/DSS	FX3UC-96MT/D	FX3UC-96MT/DSS
Integrated inputs/outputs		64	64	96	96
Integrated inputs		32	32	48	48
Input type		Sink	Sink/Source	Sink	Sink/Source
Integrated outputs		32	32	48	48
Power supply		24 V DC	24 V DC	24 V DC	24 V DC
Output type		Transistor (sink)	Transistor (source)	Transistor (sink)	Transistor (source)
Power consumption	W	11	11	14	14
Weight	kg	0.3	0.3	0.35	0.35
Dimensions (W x H x D)	mm	59.7 x 90 x 74	59.7 x 90 x 74	85.4 x 90 x 74	85.4 x 90 x 74

FX3G

Production will be discontinued in Dec. 2026.

Main Units with 14 I/O

Specifications		FX3G-14MR/DS	FX3G-14MR/ES	FX3G-14MT/DSS	FX3G-14MT/DS	FX3G-14MT/ESS	FX3G-14MT/ES
Integrated inputs/outputs		14	14	14	14	14	14
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		8	8	8	8	8	8
Integrated outputs		6	6	6	6	6	6
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC
Power consumption	W	19	31	19	19	31	31
Weight	kg	0.5	0.5	0.5	0.5	0.5	0.5
Dimensions (W x H x D)	mm	90 x 90 x 86	90 x 90 x 86	90 x 90 x 86	90 x 90 x 86	90 x 90 x 86	90 x 90 x 86

Main Units with 24 I/O

Specifications		FX3G-24MR/DS	FX3G-24MR/ES	FX3G-24MT/DSS	FX3G-24MT/DS	FX3G-24MT/ESS	FX3G-24MT/ES
Integrated inputs/outputs		24	24	24	24	24	24
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		14	14	14	14	14	14
Integrated outputs		10	10	10	10	10	10
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC
Power consumption	W	21	32	21	21	32	32
Weight	kg	0.55	0.55	0.55	0.55	0.55	0.55
Dimensions (W x H x D)	mm	90 x 90 x 86	90 x 90 x 86	90 x 90 x 86	90 x 90 x 86	90 x 90 x 86	90 x 90 x 86

Main Units with 40 I/O

Specifications		FX3G-40MR/DS	FX3G-40MR/ES	FX3G-40MT/DSS	FX3G-40MT/DS	FX3G-40MT/ESS	FX3G-40MT/ES
Integrated inputs/outputs		40	40	40	40	40	40
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		24	24	24	24	24	24
Integrated outputs		16	16	16	16	16	16
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC
Power consumption	W	25	37	25	25	37	37
Weight	kg	0.7	0.7	0.7	0.7	0.7	0.7
Dimensions (W x H x D)	mm	130 x 90 x 86	130 x 90 x 86	130 x 90 x 86	130 x 90 x 86	130 x 90 x 86	130 x 90 x 86

Main Units with 60 I/O

Specifications		FX3G-60MR/DS	FX3G-60MR/ES	FX3G-60MT/DSS	FX3G-60MT/DS	FX3G-60MT/ESS	FX3G-60MT/ES
Integrated inputs/outputs		60	60	60	60	60	60
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		36	36	36	36	36	36
Integrated outputs		24	24	24	24	24	24
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC
Power consumption	W	29	40	29	29	40	40
Weight	kg	0.85	0.85	0.85	0.85	0.85	0.85
Dimensions (W x H x D)	mm	175 x 90 x 86	175 x 90 x 86	175 x 90 x 86	175 x 90 x 86	175 x 90 x 86	175 x 90 x 86

FX3GC

Production will be discontinued in Dec. 2026.

Main Units with 32 I/0

Specifications		FX3GC-32MT/D	FX3GC-32MT/DSS
Integrated inputs/outputs		32	32
Input type		sink	sink/source
Integrated inputs		16	16
Input type		Sink	Sink/Source
Integrated outputs		16	16
Output type		Transistor(sink)	Transistor(source)
Power supply		24 V DC	24 V DC
Power consumption	W	8	8
Weight	kg	0.2	0.2
Dimensions (W x H x D)	mm	34 x 90 x 87	34 x 90 x 87

FX3S

Main Units with 10 I/0

Specifications		FX3S-10MR/DS	FX3S-10MR/ES	FX3S-10MT/DSS	FX3S-10MT/DS	FX3S-10MT/ESS	FX3S-10MT/ES
Integrated inputs/outputs		10	10	10	10	10	10
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		6	6	6	6	6	6
Integrated outputs		4	4	4	4	4	4
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC
Power consumption	W	6	19	6	6	19	19
Weight	kg	0.22	0.30	0.22	0.22	0.30	0.30
Dimensions (W x H x D)	mm	60 x 40 x 49	60 x 90 x 75	60 x 40 x 49	60 x 40 x 49	60 x 90 x 75	60 x 90 x 75

Main Units with 14 I/0

Specifications		FX3S-14MR/DS	FX3S-14MR/ES	FX3S-14MT/DSS	FX3S-14MT/DS	FX3S-14MT/ESS	FX3S-14MT/ES
Integrated inputs/outputs		14	14	14	14	14	14
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		8	8	8	8	8	8
Integrated outputs		6	6	6	6	6	6
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		100–240 V AC	100–240 V AC	100–240 V AC	100–240 V AC	100–240 V AC	100–240 V AC
Power consumption	W	6.5	6	6.5	6.5	6	6
Weight	kg	0.22	0.30	0.22	0.22	0.30	0.30
Dimensions (W x H x D)	mm	60 x 90 x 49	60 x 90 x 49	60 x 90 x 49	60 x 90 x 49	60 x 90 x 49	60 x 90 x 49

Main Units with 20 – 30 I/0

Specifications		FX3S-20MR/DS	FX3S-20MR/ES	FX3S-20MT/DSS	FX3S-20MT/DS	FX3S-20MT/ESS	FX3S-20MT/ES
Integrated inputs/outputs		20	20	20	20	20	20
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		12	12	12	12	12	12
Integrated outputs		8	8	8	8	8	8
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC
Power consumption	W	7	20	7	7	20	20
Weight	kg	0.30	0.40	0.30	0.30	0.40	0.40
Dimensions (W x H x D)	mm	75 x 90 x 49	75 x 90 x 75	75 x 90 x 49	75 x 90 x 49	75 x 90 x 75	75 x 90 x 75

Main Units with 30 I/O

Specifications		FX3S-30MR/DS	FX3S-30MR/ES	FX3S-30MT/DSS	FX3S-30MT/DS	FX3S-30MT/ESS	FX3S-30MT/ES
Integrated inputs/outputs		30	30	30	30	30	30
Input type		sink/source	sink/source	sink/source	sink/source	sink/source	sink/source
Integrated inputs		16	16	16	16	16	16
Integrated outputs		14	14	14	14	14	14
Output type		Relay	Relay	Transistor (source)	Transistor (sink)	Transistor (source)	Transistor (sink)
Power supply		24 V DC	100–240 V AC	24 V DC	24 V DC	100–240 V AC	100–240 V AC
Power consumption	W	8.5	21	8.5	8.5	21	21
Weight	kg	0.35	0.45	0.35	0.35	0.45	0.45
Dimensions (W x H x D)	mm	100 x 90 x 49	100 x 90 x 75	100 x 90 x 49	100 x 90 x 49	100 x 90 x 75	100 x 90 x 75


Main Units with 30 I/O and analog inputs

Specifications		FX3S-30MR/ES-2AD	FX3S-30MT/ESS-2AD	FX3S-30MT/ES-2AD
Integrated inputs/outputs		30	30	30
Integrated inputs		16	16	16
Input type		sink/source	sink/source	sink/source
Integrated outputs		14	14	14
Output type		Relay	Transistor (source)	Transistor (sink)
Analog input range		0 to 10 V DC (Input resistance: 115.7 kΩ)	0 to 10 V DC (Input resistance: 115.7 kΩ)	0 to 10 V DC (Input resistance: 115.7 kΩ)
Analog channels	inputs	2	2	2
Resolution	voltage	10 mV (10 V/1000)	10 mV (10 V/1000)	10 mV (10 V/1000)
Power supply		100–240 V AC	100–240 V AC	100–240 V AC
Power consumption	W	21	21	21
Weight	kg	0.45	0.45	0.45
Dimensions (W x H x D)	mm	100 x 90 x 75	100 x 90 x 75	100 x 90 x 75

DESCRIPTION OF UNIT COMPONENTS

FX3U


Production will be discontinued in Sep. 2028.

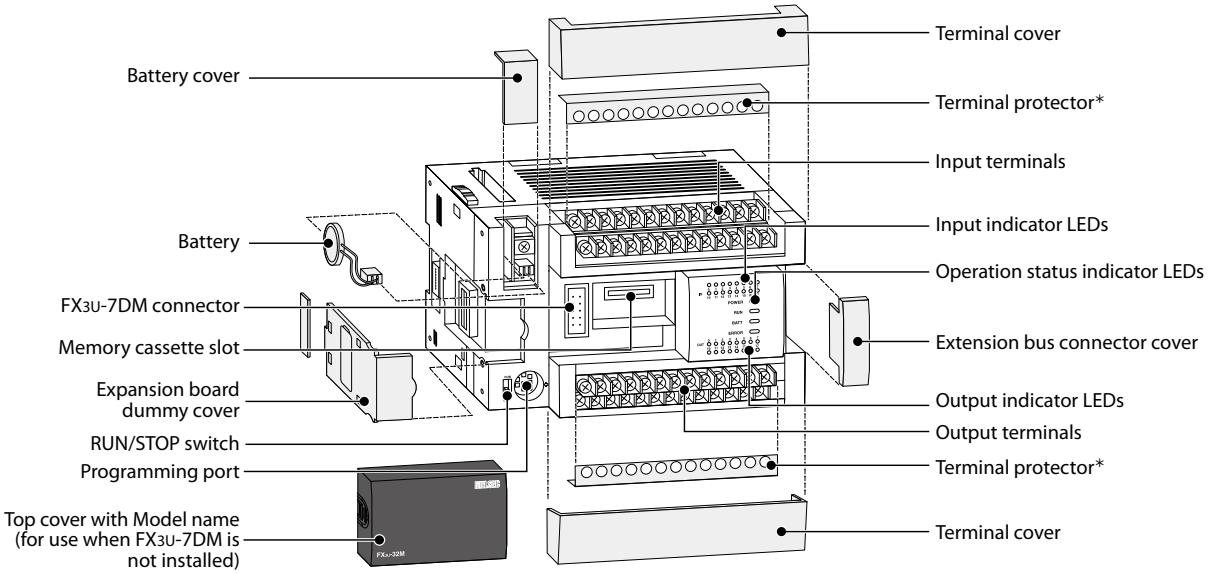

*: There is no terminal protector on "-A" product.


FX3UC

Production will be discontinued in Sep. 2028.

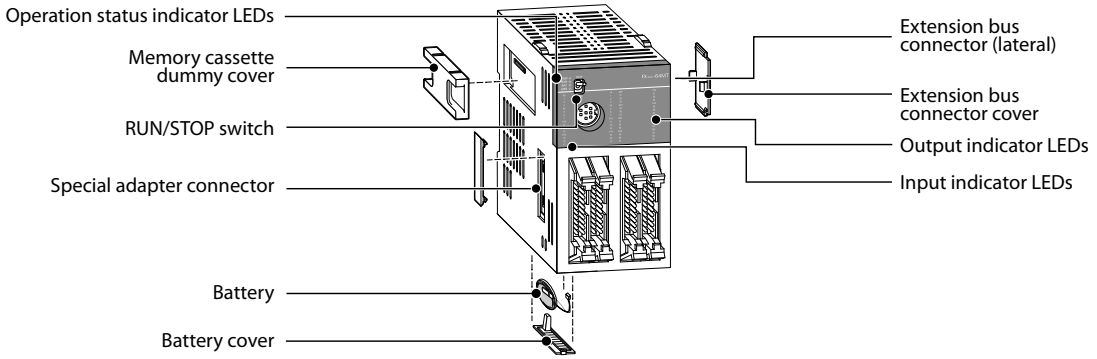

FX3G


Production will be discontinued in Dec. 2026.

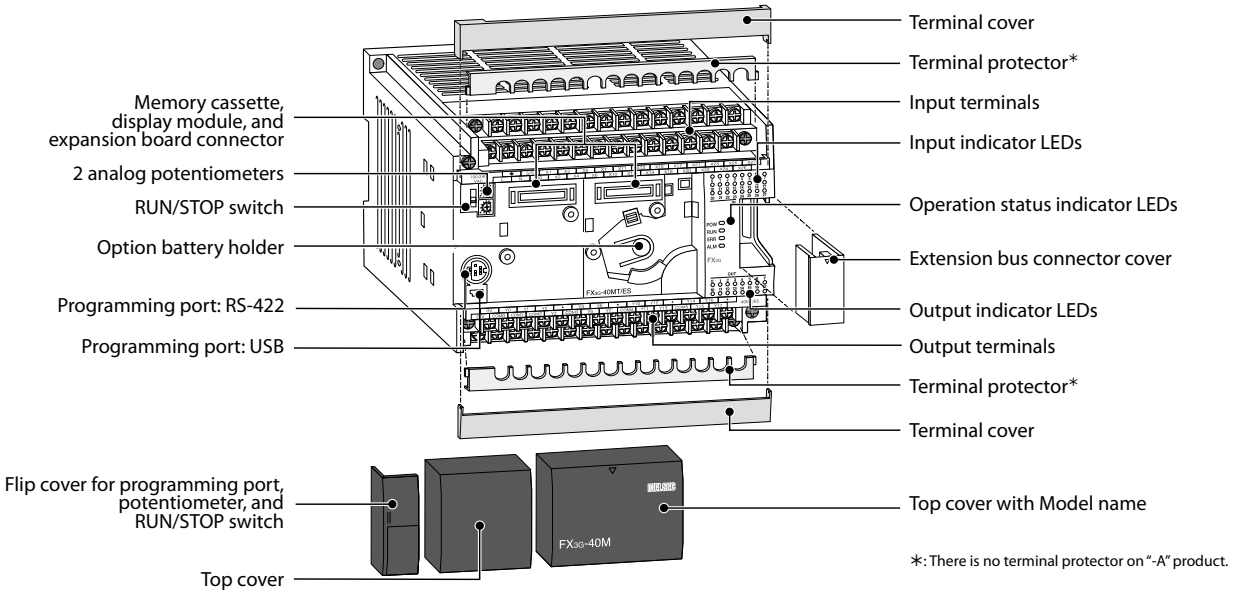


*: There is no terminal protector on "-A" product.

FX3GC

Production will be discontinued in Dec. 2026.

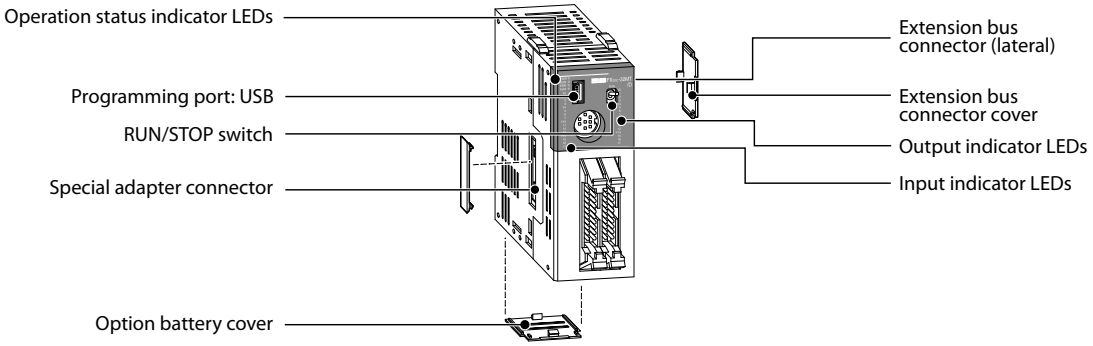


FX3S

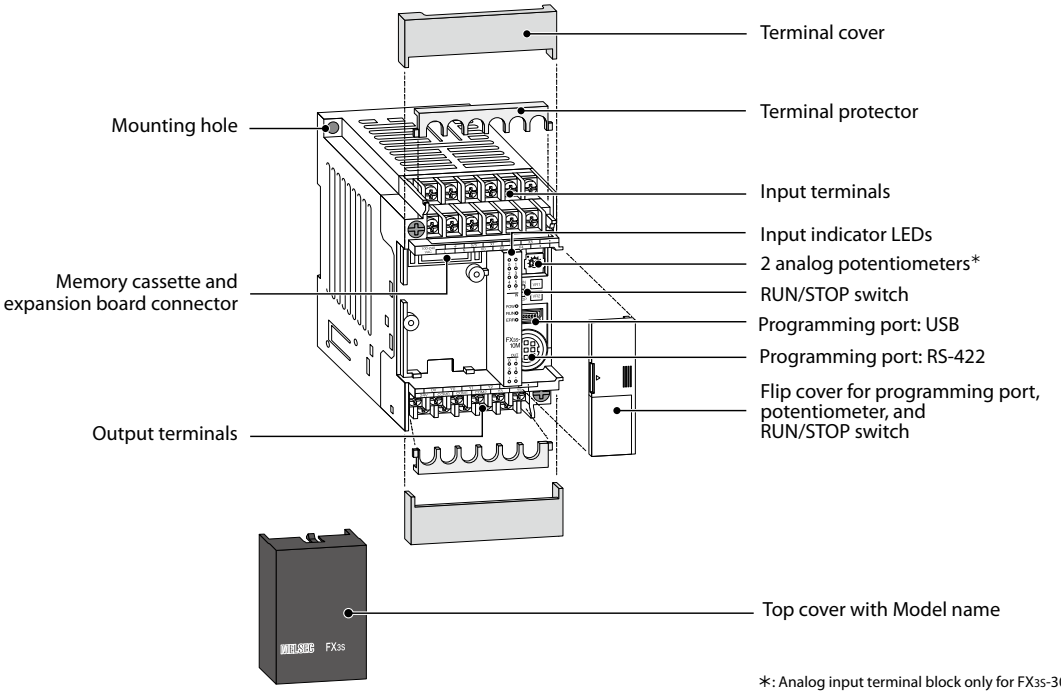

*: Analog input terminal block only for FX3S-30M[]/ES[]-2AD

■ Expansion Boards

☑ FX3S ☑ FX3G ☐ FX3GC ☐ FX3U ☐ FX3UC



FX3G-4EX-BD

FX3G-4EX-BD and FX3G-2EYT-BD Expansion Boards


The FX3G series expansion boards are available for the FX3S and FX3G main unit and add 4 inputs or 2 outputs to the system. These boards are advantageous when only a few additional I/O are required without adding to the installation space.

Specifications			FX3G-4EX-BD	FX3G-2EYT-BD
Integrated inputs/outputs			4	2
Power supply			5 V DC (from main unit); 24 V DC/25 mA (S/S terminal)	5 V DC (from main unit)
Integrated inputs			4	—
Input		voltage	24 V DC (+20%/-15%)	—
		current	5 mA (24 V DC)	—
Integrated outputs			—	2
Output type			—	Transistor
Max. switching voltage			—	5 – 30 V DC
Weight		kg	0.02	0.02
Dimensions (W x H x D)		mm	35 x 51.2 x 29.2	35 x 51.2 x 29.2

■ Powered Extension Units

Production will be discontinued in Sep. 2028.

☐ FX3S ☑ FX3G ☐ FX3GC ☑ FX3U ☐ FX3UC

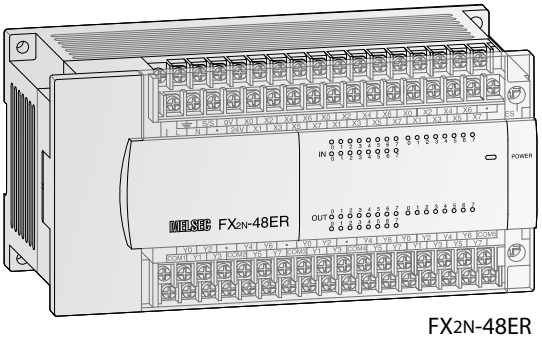

FX2N-48ER

FX2N Extension Units

The FX2N series extension units are available with 32 or 48 integrated I/O with selectable relay or transistor output models.

Features:

- Input and output indicator LEDs
- FX3G and FX3U series compatible
- Removable terminal blocks
- Integrated service power supply with up to 250 mA or 460 mA capacity

Specifications				FX2N-32ER-ES/UL	FX2N-32ET-ESS/UL	FX2N-48ER-DS	FX2N-48ER-ES/UL	FX2N-48ER-UA1/UL	FX2N-48ET-DSS	FX2N-48ET-ESS/UL
Electrical data	Integrated inputs/outputs			32	32	48	48	48	48	48
	Power supply	AC range (+10%, -15%)		100 – 240 V	100 – 240 V	—	100 – 240 V	100 – 240 V	—	100 – 240 V
		Frequency at AC	Hz	50/60	50/60	—	50/60	50/60	—	50/60
		DC range (+20%, -30%)		—	—	24 V	—	—	24 V	—
	Max. input apparent power			30 W	30 W	30 W	35 W	35 W	30 W	35 W
	Inrush current at ON	100 V AC		40 A< 5 ms	40 A< 5 ms	—	40 A< 5 ms	40 A< 5 ms	40 A< 5 ms	40 A< 5 ms
		200 V AC		60 A< 5 ms	—	—	60 A< 5 ms	60 A< 5 ms	60 A< 5 ms	60 A< 5 ms
	Allowable momentary power failure time		ms	10	10	5	10	—	5	10
	External service power supply (24 V DC)		mA	250	250	—	460	—	—	460
	Power supply int. bus (5 V DC)		mA	690	690	690	690	690	690	690
Inputs	Integrated inputs			16	16	24	24	24	24	24
	Min. current for logical 1		mA	3.5	3.5	3.5	3.5	3.8	3.5	3.5
	Max. current for logical 0		mA	1.5	1.5	1.5	1.5	1.7	1.5	1.5
	Response time			10 ms (at time of shipment)						
Outputs	Integrated outputs			16	16	24	24	24	24	24
	Output type			Relay	Transistor (source)	Relay	Relay	Relay	Transistor (source)	Transistor (source)
	Switching voltage (Max.)			Relay version: < 264 V AC, < 30 V DC; Transistor version: 5 – 30 V DC						
	Max. output current	- per output	A	2	0.5	2	2	2	0.5	0.5
		- per group*1	A	8	0.8	8	8	8	0.8	0.8
	Max. switching power	- inductive load		80 VA	12 W	80 VA	80 VA	80 VA	12 W	12 W
	Response time		ms	10	< 0.2	10	10	10	< 0.2	< 0.2
	Life of contacts (switching times)*2			Relay version: 3,000,000 at 20 VA, 1,000,000 at 35 VA, 200,000 at 80 VA; Transistor version: -						
Mechanical data	Weight		kg	0.65	0.65	0.85	0.85	1.0	0.85	0.85
	Dimensions (W x H x D)		mm	150 x 90 x 87	150 x 90 x 87	182 x 90 x 87	182 x 90 x 87	220 x 90 x 87	182 x 90 x 87	182 x 90 x 87


*1 This limitation applies to the maximum output current for each reference terminal (Common), each serving 1 to 4 relay or transistor outputs. Please observe the reference terminal assignments for group identification.

*2 Not guaranteed by Mitsubishi Electric

■ Unpowered Extension Blocks

Production will be discontinued in Sep. 2028.

☐ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC

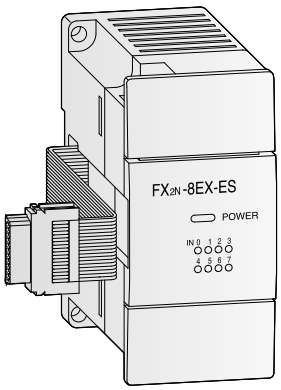

FX2N-8EX-ES

FX2N Extension Blocks

The FX2N series 8 integrated I/O extension blocks are selectable with relay or transistor outputs.

Note: When attaching an extension block to an FX3GC or FX3UC main unit, the FX2NC-CNV-IF interface converter or the FX3UC-1PS-5V power supply unit is required.

Features:

- Input and output indicator LEDs
- FX3G, FX3GC, FX3U, and FX3UC series compatible
- Vertically arranged terminals with upper or lower side cable placement available


Specifications			FX2N-8ER-ES/UL	FX2N-8EX-ES/UL	FX2N-8EX-UA1/UL	FX2N-8EYR-ES/UL	FX2N-8EYT-ESS/UL
Electrical data							
Integrated inputs/outputs			8	8	8	8	8
Power supply			All extension blocks are powered by the main unit or attached extension unit.				
Inputs							
Integrated inputs			4	8	8	—	—
Min. current for logical 1		mA	3.5	3.5	≥3.8	—	—
Max. current for logical 0		mA	1.5	1.5	≤1.7	—	—
Response time			10 ms				
Outputs							
Integrated outputs			4	—	—	8	8
Output type			Relay	—	—	Relay	Transistor (source)
Max. switching voltage			Relay version: < 240 V AC, < 30 V DC; Transistor version: 5 – 30 V DC				
Max. output current	- per output	A	2	—	—	2	0.5
	- per group*1	A	8	—	—	8	0.8
Max. switching power	- inductive load		80 VA	—	—	80 VA	12 W
Response time		ms	10	10	10	10	< 0.2
Life of contacts (switching times)*2			Relay version: 3,000,000 at 20 VA, 1,000,000 at 35VA, 200,000 at 80 VA; Transistor version: -				
Mechanical data							
Weight		kg	0.2	0.2	0.2	0.2	0.2
Dimensions (W x H x D)		mm	43 x 90 x 87	43 x 90 x 87	43 x 90 x 87	43 x 90 x 87	43 x 90 x 87

*1 This limitation applies to the maximum output current for each reference terminal (Common), each serving 1 to 4 relay or transistor outputs. Please observe the reference terminal assignments for group identification.

*2 Not guaranteed by Mitsubishi Electric

■ Unpowered Extension Blocks

Production will be discontinued in Sep. 2028. ☐ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC

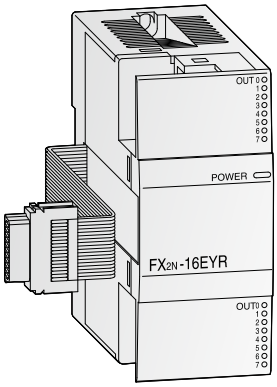

FX2N-16EYR

FX2N Extension Blocks

The FX2N series 16 integrated I/O extension blocks are selectable with relay, transistor, or triac outputs.

Note: When attaching an extension block to an FX3GC or FX3UC main unit, the FX2NC-CNV-IF interface converter or the FX3UC-1PS-5V power supply unit is required.

Features:

- Input and output indicator LEDs
- FX3G, FX3GC, FX3U, and, FX3UC series compatible
- Vertically arranged terminals with upper or lower side cable placement available

Specifications			FX2N-16EX-ES/UL	FX2N-16EYR-ES/UL	FX2N-16EYT-ESS/UL	FX2N-16EYS
Electrical data						
Integrated inputs/outputs			16	16	16	16
Power supply			All extension blocks are powered by the main unit or attached extension unit.			
Inputs						
Integrated inputs			16	—	—	—
Min. current for logical 1		mA	3.5	—	—	—
Max. current for logical 0		mA	1.5	—	—	—
Response time			10 ms			
Outputs						
Integrated outputs			—	16	16	16
Output type			—	Relay	Transistor (source)	Triac
Switching voltage (Max.)		V	Relay version: < 240 V AC, < 30 V DC; Transistor version: 5 – 30 V DC; Triac version: 85–242 V AC			
Max. output current	- per output	A	—	2	0.5	0.3
	- per group*1	A	—	8	1.6	0.8
Max. switching power	- inductive load		—	80 VA	12 W	15 VA/AC 100 V, 30 VA/AC 200 V
Response time		ms	—	10	< 0.2	OFF→ON < 1, ON→OFF < 10
Life of contacts (switching times)*2			Relay version: 3,000,000 at 20 VA, 1,000,000 at 35 VA, 200,000 at 80 VA; Transistor version: - ; Triac version: -			
Mechanical data						
Weight		kg	0.3	0.3	0.3	0.3
Dimensions (W x H x D)		mm	40 x 90 x 87	40 x 90 x 87	40 x 90 x 87	40 x 90 x 87


*1 This limitation applies to the maximum output current for each reference terminal (Common), each serving 1 to 4 relay, transistor, or triac outputs. Please observe the reference terminal assignments for group identification.

*2 Not guaranteed by Mitsubishi Electric


■ Unpowered Extension Blocks

Production will be discontinued in Sep. 2028.

☐ FX3S ☐ FX3G ☑ FX3GC ☐ FX3U ☑ FX3UC

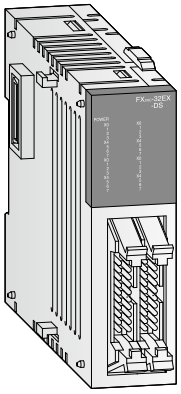

FX2NC-32EX-DS

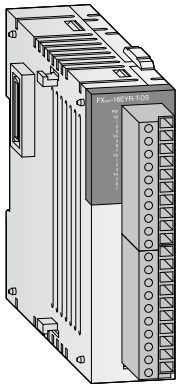

FX2NC-16EYR-T-DS

FX2NC Extension Blocks

The FX2NC series extension blocks are available with 16 or 32 integrated I/O with selectable relay or transistor 16-output models.

Features:

- Ultra-compact dimensions
- Input and output indicator LEDs
- Removable terminal blocks for FX2NC-16EYR-T-DS and FX2NC-16EX-T-DS
- Adapter modules and system cabling sets available for units with ribbon cable connectors (transistor output types)


Specifications			FX2NC-16EX-T-DS	FX2NC-16EYR-T-DS	FX2NC-16EX-DS	FX2NC-16EYT-DSS	FX2NC-32EX-DS	FX2NC-32EYT-DSS
Electrical data								
Integrated inputs/outputs			16	16	16	16	32	32
Power supply			All extension blocks are powered by the main unit.					
Inputs								
Integrated inputs			16	—	16	—	32	—
Input current			5	—	5	—	5	—
Min. current for logical 1		mA	3.5	—	3.5	—	3.5	—
Max. current for logical 0		mA	1.5	—	1.5	—	1.5	—
Isolation			Photocoupler isolation between input terminals and PC power for all base units.					
Response time			10 ms	—	10 ms	—	10 ms	—
Outputs								
Integrated outputs			—	16	—	16	—	32
Output type			—	Relay	—	Transistor (source)	—	Transistor (source)
ON voltage (Max.)		V	Relay version: < 240 V AC, < 30 V DC; Transistor version: 5 – 30 V DC					
Max. output current	- per output	A	—	2	—	0.1	—	0.1
	- per group*1	A	—	4	—	0.8	—	0.8
Max. switching power	- inductive load		—	80 VA	—	2.4 W	—	2.4 W
Response time		ms	—	10	—	< 0.2	—	< 0.2
Life of contacts (switching times)*2			Relay version: 3,000,000 at 20 VA, 1,000,000 at 35VA, 200,000 at 80 VA; Transistor version: -					
Mechanical data								
Connection type			Removable screw terminal blocks	Removable screw terminal blocks	Ribbon cable connector	Ribbon cable connector	Ribbon cable connector	Ribbon cable connector
Weight		kg	0.15	0.15	0.15	0.15	0.2	0.2
Dimensions (W x H x D)		mm	20.2 x 90 x 89	24.2 x 90 x 89	14.6 x 90 x 87	14.6 x 90 x 87	26.2 x 90 x 87	26.2 x 90 x 87

*1 This limitation applies to the maximum output current for each reference terminal (Common), each serving 1 to 4 relay or transistor outputs. Please observe the reference terminal assignments for group identification.


*2 Not guaranteed by Mitsubishi Electric

■ Analog Boards

☑ FX3S ☑ FX3G ☐ FX3GC ☑ FX3U ☐ FX3UC



FX3G-8AV-BD




FX3U-8AV-BD*

FX3G-8AV-BD and FX3U-8AV-BD Analog Setpoint boards

The FX3G-8AV-BD analog setpoint board is available for the FX3S and FX3G.
The FX3U-8AV-BD analog setpoint board is available for the FX3U. Both provide 8 analog setpoint potentiometers to the FX system. These setpoints can be polled by the PLC and used as default values for timers, counters, and data registers with dedicated instructions VRRD/VRSC (FNC85/86).

Specifications		FX3G-8AV-BD	FX3U-8AV-BD*
Power supply		5 V DC (from main unit)	5 V DC (from main unit)
Adjustment range		8 - bit	8 - bit
Related I/O points		0	0
Potentiometer evaluation		Via PLC applied instruction (FNC 85/86)	Via PLC applied instruction (FNC 85/86)
Weight	kg	0.02	0.02
Dimensions (W x H x D)	mm	35 x 51.2 x 12	46.1 x 55.9 x 19.7

* Production will be discontinued in September 2028.



FX3G-2AD-BD


FX3G-2AD-BD Analog Expansion Board

The FX3G-2AD-BD analog input expansion board is available for the FX3S, and FX3G main units. It provides 2 analog inputs. The board converts analog voltage or current signals into digital values which can be used in the FX PLC.

Specifications		FX3G-2AD-BD
Power supply		5 V DC (from main unit)
Analog channels	inputs	2
Analog input range		0 to 10 V DC/4 to 20 mA
Resolution	voltage	2.5 mV (12 bit)
	current	8 µA (11 bit)
Overall accuracy for fullscale		± 1.0%
Related I/O points		0
Weight	kg	0.02
Dimensions (W x H x D)	mm	35 x 51.2 x 29.2

■ Analog Input Special Adapter

☑ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC

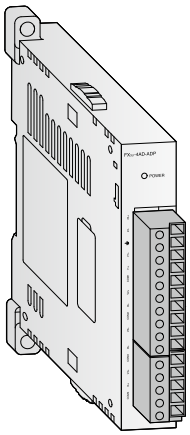

FX3U-4AD-ADP

FX3U-4AD-ADP

The FX3U-4AD-ADP analog input special adapter is available for FX3 series main units and is used for adding 4 channels of analog input to the FX PLC.

Note: When connecting to an FX3S, FX3G, or FX3U main unit, an interface adapter or interface board is required.


Specifications		FX3U-4AD-ADP
Power supply		5 V DC/15 mA (from main unit); 24 V DC/40 mA
Analog channels	inputs	4
Analog range		0 to 10 V DC/4 to 20 mA
Resolution	voltage	2.5 mV (12 bit)
	current	10 µA (11 bit)
Overall accuracy for fullscale		±0.5 % – ±1.0%*
Related I/O points		0
Weight	kg	0.1
Dimensions (W x H x D)	mm	17.6 x 90 x 89.5

* Dependent on the ambient temperature and signal quality


■ Analog Input Blocks

Production will be discontinued in Sep. 2028.

☐ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC



FX3U-4AD



FX3UC-4AD

FX3U-4AD, FX3UC-4AD

The FX3U and FX3UC analog input blocks are available for FX3G, FX3GC, FX3U, and FX3UC series main units and are used to convert analog voltage or current signals into digital values which can be used in the FX PLC. These blocks provide users with 4 analog input channels with adjustable digital filters, history data, and use an integrated high-performance CPU which converts each analog input in 500µs.


Note: The FX3UC-4AD can only be used with the FX3GC or FX3UC main unit. When attaching the FX3U-4AD analog block to an FX3GC or FX3UC main unit, the FX2NC-CNV-IF interface converter or the FX3UC-1PS-5V power supply unit is required.

Specifications			FX3U-4AD	FX3UC-4AD
Power supply			5 V DC/110 mA (from main unit); 24 V DC/90 mA	5 V DC/100mA (from main unit); 24 V DC/80mA
Analog channels	inputs		4	
Analog input range			-10 to +10 V DC/ -20 to +20 mA/4 to 20 mA DC	
Resolution	voltage		0.32 mV (15 bit + sign)	
	current		1.25 µA (14 bit + sign)	
Overall accuracy for fullscale			±0.3% – ±1.0 % fullscale*	
Related I/O points			8	
Weight		kg	0.2	0.13
Dimensions (W x H x D)		mm	55 x 90 x 87	20.2 x 90 x 89

* Dependent on the ambient temperature

■ Analog Output Board

☑ FX3S ☑ FX3G ☐ FX3GC ☐ FX3U ☐ FX3UC



FX3G-1DA-BD


FX3G-1DA-BD Analog Expansion Board

The FX3G-1DA-BD analog output expansion board is available for the FX3S and FX3G main units. It provides 1 analog output. The expansion board converts digital values from the FX3S or FX3G PLC to an analog voltage or current signal.

Specifications			FX3G-1DA-BD
Power supply			5 V DC (from main unit)
Analog channels	outputs		1
Analog output range			0 to 10 V DC/4 to 20 mA
Resolution			2.5 mV (12 bit)/8 µA (11 bit)
Overall accuracy for fullscale			±1.0%
Related I/O points			0
Weight		kg	0.02
Dimensions (W x H x D)		mm	35 x 51.2 x 29.2

■ Analog Output Special Adapter

☑ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC

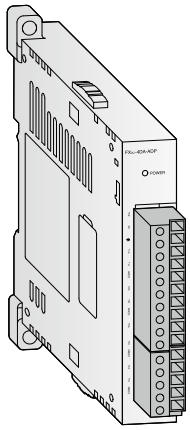

FX3U-4DA-ADP

FX3U-4DA-ADP

The FX3U-4DA-ADP analog output special adapter is available for FX series main units and is used for adding 4 channels of analog output to the FX PLC.

Note: When connecting to an FX3S, FX3G, or FX3U main unit, an interface adapter or interface board is required.


Specifications			FX3U-4DA-ADP
Power supply			5 V DC/15 mA (from main unit); 24 V DC/150 mA
Analog channels	outputs		4
Analog range			0 to 10 V DC/4 to 20 mA DC
Resolution	voltage		2.5 mV (12 bit)
	current		4 µA (12 bit)
Overall accuracy for fullscale			±0.5 % – ±1.0%*
Related I/O points			0
Weight		kg	0.1
Dimensions (W x H x D)		mm	17.6 x 90 x 89.5

* Dependent on the ambient temperature and signal quality

■ Analog Output Blocks

Production will be discontinued in Sep. 2028.

☐ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC



FX3U-4DA

FX3U-4DA

The FX3U-4DA is available for FX3G, FX3GC, FX3U, and FX3UC series main units and is used to convert digital values in the PLC to voltage or current analog output signals. This block provides users with 4 analog output channels with optional output table function and uses an integrated high-performance CPU which converts all 4 analog signals in 1ms.


Note: When attaching the FX3U-4DA analog block to an FX3GC or FX3UC main unit, the FX2NC-CNV-IF interface converter or the FX3UC-1PS-5V power supply unit is required.

Specifications			FX3U-4DA
Power supply			5 V DC/120 mA (from main unit); 24 V DC/160 mA
Analog channels	outputs		4
Analog output range			-10 to + 10 V DC/ 0 to 20 mA/4 to 20 mA DC
Resolution	voltage		0.32 mV (15 bit + sign)
	current		0.63 µA (15 bit)
Overall accuracy for fullscale			±0.3 – ±0.5 %*
Related I/O points			8
Weight		kg	0.2
Dimensions (W x H x D)		mm	55 x 90 x 87

* Dependent on the ambient temperature

■ Combination Analog I/O Adapter

☑ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC

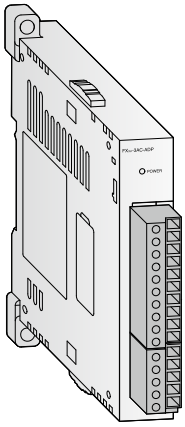

FX3U-3A-ADP

FX3U-3A-ADP

The FX3U-3A-ADP is used for both digital-to-analog and analog-to-digital conversion. This adapter provides users with 2 analog input channels and 1 analog voltage or current output channel.


Note: When connecting to an FX3S, FX3G, or FX3U main unit, an interface adapter or interface board is required.

Specifications			FX3U-3A-ADP
Power supply			5 V DC/20 mA (from main unit); 24 V DC/90 mA
Analog channels	inputs		2
	outputs		1
Analog Input range (resolution)	voltage		0 to 10 V DC (2.5 mV/12 bit)
	current		4 to 20 mA (5 µA/12 bit)
Analog Output range (resolution)	voltage		0 to 10 V DC (2.5 mV/12 bit)
	current		4 to 20 mA (4 µA/12 bit)
Overall accuracy for fullscale			±0.5 % – ±1.0%*
Related I/O points			0
Weight		kg	0.1
Dimensions (W x H x D)		mm	17.6 x 90 x 89.5


* Dependent on the ambient temperature

■ Temperature Input Special Adapters

☑ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC

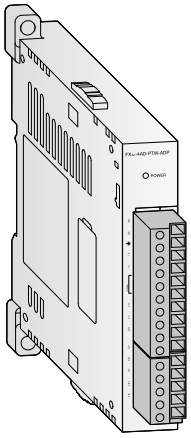

FX3U-4AD-PTW-ADP

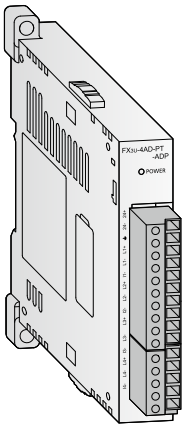

FX3U-4AD-PT-ADP


FX3U-4AD-PTW-ADP, FX3U-4AD-PT-ADP

These analog temperature input special adapters are available for FX series main units and are used for Pt100 temperature sensor input. The FX3U-4AD-PTW-ADP special adapters provide users with 4 channels of Pt100 analog input ranging from -100 to 600°C, while the FX3U-4AD-PT-ADP has a input range of -50 to 250°C.


Note: When connecting to an FX3S, FX3G, or FX3U main unit, an interface adapter or interface board is required.

Specifications		FX3U-4AD-PTW-ADP	FX3U-4AD-PT-ADP
Power supply		5 V DC/15 mA (from main unit); 24 V DC/50 mA	5 V DC/15 mA (from main unit); 24 V DC/50 mA
Analog inputs		4 (Pt100 sensors)	4 (Pt100 sensors)
Compensated temperature range	℃	-100 to +600	-50 to +250
Digital outputs		-1000 to +6000	-500 to +2500
Resolution		0.2 to 0.3℃	0.1℃
Overall accuracy for fullscale		±0.5% – ±1.0%*	±0.5% – ±1.0%*
Related I/O points		0	0
Weight	kg	0.1	0.1
Dimensions (W x H x D)	mm	17.6 x 90 x 89.5	17.6 x 90 x 89.5

* Dependent on the ambient temperature

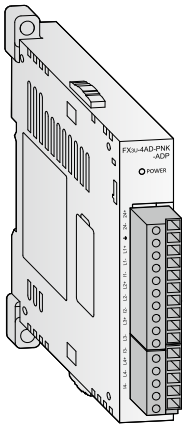

FX3U-4AD-PNK-ADP

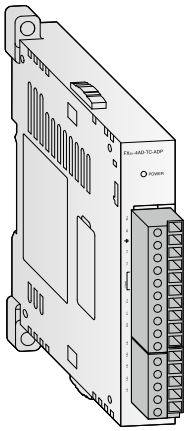

FX3U-4AD-TC-ADP

FX3U-4AD-PNK-ADP, FX3U-4AD-TC-ADP

These analog temperature input special adapters are available for FX series main units and are used for J and K type thermocouple and Pt1000/Ni1000 temperature sensor input. These special adapters provide users with 4 analog input channels with selectable input types to fit the application.

Note: When connecting to an FX3S, FX3G, or FX3U main unit, an interface adapter or interface board is required.


Specifications		FX3U-4AD-PNK-ADP	FX3U-4AD-TC-ADP
Power supply		5 V DC/15 mA (from main unit); 24 V DC/50 mA	5 V DC/15 mA (from main unit); 24 V DC/45 mA
Analog inputs		4 (Pt1000 or Ni1000)	4 (J or K type)
Compensated temperature range	℃	-50 to +250 (Pt1000)/ -40 to +110 (Ni1000)	-100 to +600 (J type)/ -100 to +1000 (K type)
Digital outputs		-500 to +2500 (Pt1000)/ -400 to +1100 (Ni1000)	-1000 to +6000 (J type)/ -1000 to +10000 (K type)
Resolution		0.1℃	0.3℃ (J type)/0.4℃ (K type)
Overall accuracy for fullscale		±0.5% – ±1.0%*	±0.5% – ±1.0%*
Related I/O points		0	0
Weight	kg	0.1	0.1
Dimensions (W x H x D)	mm	17.6 x 90 x 89.5	17.6 x 90 x 89.5

* Dependent on the ambient temperature

■ Temperature Control Blocks

Production will be discontinued in Sep. 2028.

☐ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC

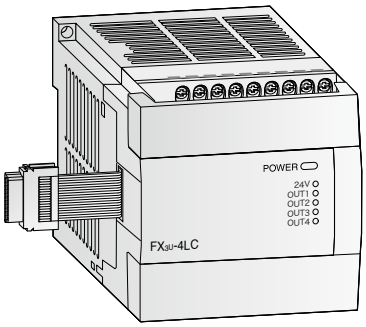

FX3U-4LC

FX3U-4LC

These temperature control blocks are used when the internal PID functions are not precise or fast enough. The 4 inputs on the FX3U-4LC support Thermocouple elements, PT elements and micro voltage inputs. Each channel of the FX3U-4LC controls two outputs for heating and cooling. The FX3U-4LC supports cascade control as well.

Note: When attaching the FX3U-4LC analog blocks to an FX3GC or FX3UC main unit, the FX2NC-CNV-IF interface converter or the FX3UC-1PS-5V power supply unit is required.


Specifications		FX3U-4LC
Power supply		5 V DC/160 mA (from main unit); 24 V DC/50 mA
Analog inputs		4 points (Thermocouple, PT and micro Voltage)
Compensated temperature range		Examples: • Type K: -100 to +1300 (°C)/ -100 to +2400 (°F) • Type J: -100.0 to +800.0 (°C)/ -100 to +2100 (°F) • Voltage input: 0 to 10 mV DC, 0 to 100 mV DC
Outputs		4 transistor outputs embedded, 4 external points
Resolution		Temperature input: 0.1°C/0.1°F or 1°C/1°F Voltage input: 0.5 µV
Overall accuracy for fullscale		±0.3% – ±0.7% (±1 digit)*
Related I/O points		8
Weight	kg	0.4
Dimensions (W x H x D)	mm	90 x 90 x 87

* Dependent on the ambient temperature

■ High-Speed Input Special Adapter

Production will be discontinued in Sep. 2028.

☐ FX3S ☐ FX3G ☐ FX3GC ☑ FX3U ☐ FX3UC

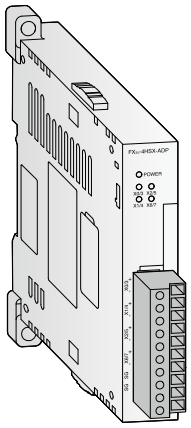

FX3U-4HSX-ADP

FX3U-4HSX-ADP


The FX3U-4HSX-ADP is available for the FX3U main unit and are used to allow direct processing of positioning applications on the FX system. The FX3U-4HSX-ADP upgrades 4 of the built-in high-speed counter inputs to 200 kHz capacity.

Specifications			FX3U-4HSX-ADP
Power supply			5 V DC/30 mA (from main unit); 24 V DC/30 mA (from main unit)
Maximum connectivity			2
Related I/O points			4
I/O type	inputs		4
	outputs		—
Max. frequency	inputs	kHz	1-phase: 200 2-phase: 100
	outputs	kHz	—
Input format			Differential line receiver (equivalent to AM26C32)
Output format			—
Maximum cable length		m	10
Input voltage			5 V DC
Output load			—
Weight		kg	0.08
Dimensions (W x H x D)		mm	17.6 x 90 x 89.5

■ High-Speed Counter Blocks

Production will be discontinued in Sep. 2028.

☐ FX3S ☐ FX3G ☐ FX3GC ☑ FX3U ☑ FX3UC

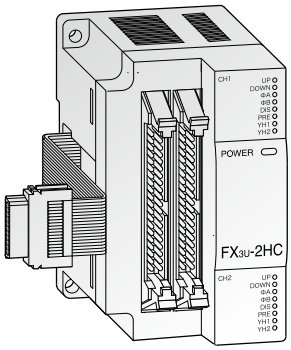

FX3U-2HC

FX3U-2HC

FX3U-2HC provide additional high speed counter or counters to the attached FX main unit. The FX3U-2HC increases the maximum frequency to 200 kHz.

The two integrated transistor outputs per counter can be switched independently of one another by means of internal comparison functions. Hence, simple positioning tasks can also be handled economically. In addition, all three blocks can be used as a ring counter.


Note: When attaching the FX3U-2HC high-speed counter block to an FX3UC main unit, the FX2NC-CNV-IF interface converter or the FX3UC-1PS-5V power supply unit is required.

Specifications		FX3U-2HC
Signal level		5, 12, 24 V DC
Power supply		5 V DC/245 mA (from main unit)
Counter inputs		1-phase (1 input or 2 input) 2-phase (1edge , 2edge or 4 edge count)
Max. counting frequency		200 kHz
Input format		Differential line receiver/Open collector
Input channels		2
Type of counter		Up/down counter, ring counter
Counting range	16 bit	0 to +65,535
	32 bit	-2,147,483,648 to +2,147,483,647
Output type		4 x transistor (5 to 24 V DC/0.5 A)
Related I/O points		8
Weight	kg	0.2
Dimensions (W x H x D)	mm	55 x 90 x 87

■ High-Speed Output Special Adapter

Production will be discontinued in Sep. 2028.

☐ FX3S ☐ FX3G ☐ FX3GC ☑ FX3U ☐ FX3UC

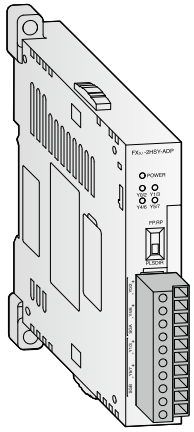

FX3U-2HSY-ADP

FX3U-2HSY-ADP


The FX3U-2HSY-ADP is available for the FX3U main unit and is used to allow direct processing of positioning applications on the FX system. The FX3U-2HSY-ADP upgrades 2 of the built-in high-speed outputs to 200 kHz capacity.

Specifications			FX3U-2HSY-ADP
Power supply			5 V DC/30 mA (from main unit); 24 V DC/60 mA (from main unit)
Max. connectivity			2
Related I/O points			4
I/O type	inputs		—
	outputs		(2 output points occupied per high-speed output)
Max. frequency	inputs	kHz	—
	outputs	kHz	200
Input format			—
Output format			Differential line driver (equivalent to AM26C31) Pulse/Direction or Forward/Reverse Rotation
Max. cable length		m	10
Input voltage			—
Output load			less than 25 mA
Weight		kg	0.08
Dimensions (W x H x D)		mm	17.6 x 90 x 89.5

■ 2-Axis Positioning Block

Production will be discontinued in Sep. 2028.

☐ FX3S ☐ FX3G ☐ FX3GC ☑ FX3U ☑ FX3UC

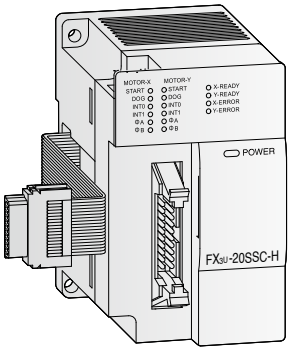

FX3U-20SSC-H

FX3U-20SSC-H

The FX3U-20SSC-H is a high-performance 2-axis positioning block for the FX3U and FX3UC main units. The module uses the SSCNET III servo system control network which implements noise-free fiber optic cabling with station-to-station spacing of up to 50 m and communication speeds up to 50 Mbps. Servo amplifier and positioning parameters are all saved within the module for easy recovery and re-installation. The block features simultaneous and interpolated 2-axis positioning control by way of operation patterns as well as pre-defined table setup. With its dedicated setup, monitor, and testing software, FX Configurator-FP, all aspects of the servo system can be centrally accessed and adjusted.


Note: When attaching FX3U-20SSC-H positioning blocks to an FX3UC main unit, the FX2NC-CNV-IF interface converter or theFX3UC-1PS-5V power supply unit is required.

Specifications			FX3U-20SSC-H
Number of controllable axes			2 axes
Related I/O points			8
Connectable servo amplifier			MELSERVO MR-J4-B, MR-J3-BS, MR-J3-B, or MR-J3-W Max. 2 amplifiers can be connected Standard cord length: Station-to-station Max. 20 m Long distance cord length: Station-to-station Max. 50 m
Servo bus			SSCNET III
Scan cycle			1.77 ms
Positioning	Method		Increment/Absolute
	User Units		PLS, µm, 10^{-4}inch, mdeg
	Unit magnification		1, 10, 100, and 1000-fold
	Positioning range		-2,147,483,648 to 2,147,483,647 PLS
	Speed units		Hz, cm/min, 10deg/min, inch/min
	Acceleration/ deceleration process		Trapezoidal acceleration/deceleration, S-pattern acceleration/deceleration: 1 to 5000ms Only trapezoidal acceleration/deceleration is available for interpolation
	Starting time		1.6ms or less
	Interpolation function		2-axis linear interpolation, 2-axis circular interpolation
Power supply			24 V DC +20% -15% Ripple (p-p) within 5%
Power consumption			5 W
Weight		kg	0.3
Dimensions (W x H x D)		mm	55 x 90 x 87

■ 1-Axis Positioning Blocks

Production will be discontinued in Sep. 2028.

☐ FX3S ☐ FX3G ☐ FX3GC ☑ FX3U ☑ FX3UC

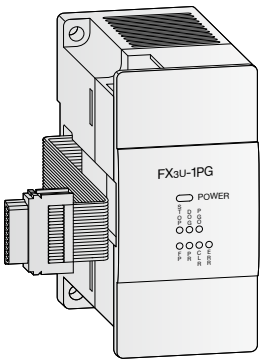

FX3U-1PG

FX3U-1PG


The FX3U-1PG positioning blocks are extremely efficient single-axis positioning modules for controlling either step drives or servo drives with a pulse train. The blocks are very suitable for achieving accurate positioning in combination with the FX series using a wide range of manual and automatic functions. The configuration and allocation of the positioning data are carried out directly via the PLC program.

Note: When attaching FX3U positioning blocks to an FX3UC main unit, the FX2NC-CNV-IF interface converter or the FX3UC-1PS-5V power supply unit is required.


Specifications		FX3U-1PG
Signal level for digital inputs		24 V DC/40 mA
Power supply		5 V DC/150 mA (from main unit)
Accessible axes		1
Output frequency		Max. 200 kHz
Related I/O points		8
Weight	kg	0.2
Dimensions (W x H x D)	mm	43 x 90 x 87

■ Expansion Boards

☑ FX3S ☑ FX3G ☐ FX3GC ☑ FX3U ☐ FX3UC



FX3U-232-BD*




FX3G-232-BD

FX3G-232-BD and FX3U-232-BD Communication Expanison Boards


These communication expansion boards allow their respective FX main units to communicate with external devices and other FX main units over RS-232C.

Specifications		FX3G-232-BD	FX3U-232-BD*
Applicable main units		FX3S, FX3G	FX3U
Interface		RS-232C with 9 pole D-SUB connector	
Power supply		5 V DC/20 mA (from main unit)	
Related I/O points		—	—
Weight	kg	0.02	0.02
Dimensions (W x H x D)	mm	35 x 51.2 x 17.2	19.3 x 46.1 x 62.7

* Production will be discontinued in September 2028.



FX3U-422-BD*




FX3G-422-BD

FX3G-422-BD and FX3U-422-BD Communication Expanison Boards


These communication expansion boards add an additional RS-422 programming port to their respective FX main units to communicate with external equipment.

Specifications		FX3G-422-BD	FX3U-422-BD*
Applicable main units		FX3S, FX3G	FX3U
Interface		RS-422 with 8 pole mini DIN connector	
Power supply		5 V DC/20 mA (from main unit)	
Related I/O points		—	—
Weight	kg	0.02	0.02
Dimensions (W x H x D)	mm	35 x 51.2 x 14.9	19.6 x 46.1 x 53.5

* Production will be discontinued in September 2028.



FX3U-485-BD*




FX3G-485-BD-RJ

FX3G-485-BD, FX3G-485-BD-RJ and FX3U-485-BD Communication Expanison Boards

These communication expansion boards allow their respective FX main units to communicate with external devices and other FX main units over an RS-485 serial communication network.

Specifications		FX3G-485-BD	FX3G-485-BD-RJ	FX3U-485-BD*
Applicable main units		FX3S, FX3G	FX3S, FX3G	FX3U
Interface		RS-485	RJ-45	RS-485
Power supply		5 V DC/20 mA (from main unit)	5 V DC/20 mA (from main unit)	5 V DC/40 mA (from main unit)
Related I/O points		—	—	—
Weight	kg	0.02	0.02	0.02
Dimensions (W x H x D)	mm	35 x 51.2 x 29.2	35 x 51.2 x 22	19.6 x 46.1 x 69

* Production will be discontinued in September 2028.



FX3U-USB-BD*

FX3U-USB-BD Communication Expansion Board


The FX3U-USB-BD communication expansion board is available for the FX3U main unit and provides a direct PC-to-PLC connection port for a standard USB cable.

Specifications		FX3U-USB-BD*
Applicable main units		FX3U
Power supply		5 V DC/15 mA (from main unit), 30 mA (from PC USB connector)
Weight	kg	0.02
Dimensions (W x H x D)	mm	19.6 x 46.1 x 53.5


* Production will be discontinued in September 2028.

■ MODBUS & Serial Communication Special Adapters

☑ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC

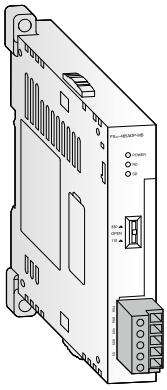

FX3U-485ADP-MB

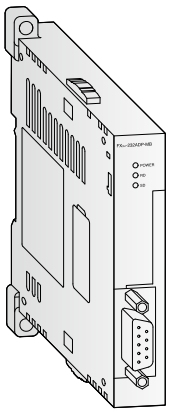

FX3U-232ADP-MB

FX3U-485ADP-MB, FX3U-232ADP-MB

The FX3U-485ADP-MB and FX3U-232ADP-MB communication special adapters are available for FX series main units and support a wide range of serial communication standards including MODBUS. MODBUS functionality requires an FX3U or FX3UC main unit of firmware version 2.40 or later, an FX3G main unit of firmware version 1.30 or later and for MODBUS master functionality, GX Developer 8.45X or later.

Note: When attaching the FX3U-485ADP-MB or FX3U-232ADP-MB to an FX3S, FX3G, or FX3U main unit, an interface adapter or interface board is required.


Specifications		FX3U-485ADP-MB	FX3U-232ADP-MB
Power supply		5 V DC/20 mA (from main unit)	5 V DC/30 mA (from main unit)
Interface		RS-485	RS-232C
Communication speed*		Max. 115.2 kbps	Max. 115.2 kbps
Communication distance		Max. 500 m	Max. 15 m
Related I/O points		0	0
Weight	kg	0.08	0.08
Dimensions (W x H x D)	mm	17.6 x 90 x 89.5	17.6 x 90 x 89.5

* Communication speed depends on the serial communication method being used (N:N Network, Parallel Link, Computer Link, Inverter communication, Non-protocol communication, Programming communication, Remote Maintenance, or MODBUS).


■ CC-Link V2 Blocks

Production will be discontinued in Sep. 2028.

☐ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC



FX3U-16CCL-M



FX3U-64CCL

FX3U-16CCL-M Master Block and FX3U-64CCL Interface Block

These 2 units are available for FX3G, FX3GC, FX3U and FX3UC main units and enable CC-Link V2 functionality for expanded cyclic transmission and programming via CC-Link.
A large range of CC-Link devices can be found in the Mitsubishi Electric CC-Link compatible product catalog.

Note: When attaching the FX3U-16CCL-M or FX3U-64CCL to an FX3GC or FX3UC main unit, the FX2NC-CNV-IF interface converter or the FX3UC-1PS-5V power supply unit is required.


Specifications		FX3U-16CCL-M	FX3U-64CCL
Module type		Master station	Intelligent device station
Link points per station	I/O points	128 (Occupying 1 station with Octuple expanded cyclic setting)	128 (Occupying 1 station with Octuple expanded cyclic setting)
	registers	32 (Occupying 1 station with Octuple expanded cyclic setting)	32 (Occupying 1 station with Octuple expanded cyclic setting)
Max. number of I/O points		256 (with FX3G/FX3GC PLC), 384 (with FX3U/FX3UC PLC)*	
Number of connectable modules		Max. 16	—
Related I/O points		8	8
Max. transmission speed		10 Mbps	10 Mbps
Power supply		24 V DC/240 mA	24 V DC/220 mA
Weight	kg	0.3	0.3
Dimensions (W x H x D)	mm	55 x 90 x 87	55 x 90 x 87

* Including I/O points in PLC and network.

■ AnyWireASLINK Block

Production will be discontinued in Sep. 2028.

☐ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC

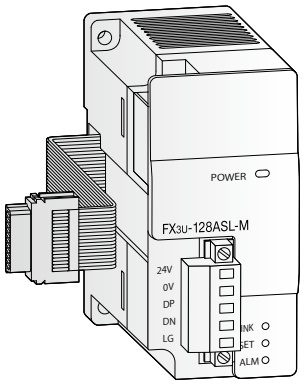

FX3U-128ASL-M

FX3U-128ASL-M

For FX3U-128ASL-M type AnyWireASLINK system master block, a unique transmission method of AnyWireASLINK is utilized in a transmission signal having a power supply (equiv. to 24 V DC, MAX. 2 A). It enables wire saving of max. 200 m using 4-core or 2-core power cables.

The FX3U-128ASL-M is jointly developed/manufactured with Anywire Corporation. Warranty details are different from other PLC products.


Note: When attaching the FX3U-128ASL-M to an FX3GC or FX3UC main unit, the FX2NC-CNV-IF interface converter or the FX3UC-1PS-5V power supply unit is required.

Specifications		FX3U-128ASL-M
Transmission clock		27.0 kHz
Max. transmission distance (total extension length)		200 m
Transmission system		DC power supply transmission total frame cyclic system
Connection type		Bus topology (multidrop system, T-branch system, tree branch system)
Transmission protocol		Dedicated protocol (AnyWireASLINK)
Communication with PLC		By FROM and TO instructions or direct specification of buffer memory via the buffer memory.
Max. number of connected I/O points		128 points (countable either by input or output)
Max. number of connected modules		128 modules
Power supply		5 V DC/130 mA
Related I/O points		8 points
No. of connectable blocks to the main unit		1 unit
Weight	kg	0.2
Dimensions (W x H x D)	mm	43 x 90 x 95.5

■ Interface Board

Production will be discontinued in Sep. 2028.

☐ FX3S ☐ FX3G ☐ FX3GC ☑ FX3U ☐ FX3UC



FX3U-CNV-BD

FX3U-CNV-BD


The FX series interface board enables connection of special adapters to the left- side of the associated FX3U main unit. Communication expansion boards may also be used for the FX3U main unit.

Note: The FX3U-2HSY-ADP and FX3U-4HSX-ADP do not require an FX3U-CNV-BD interface board to connect to the FX3U main unit.

Specifications		FX3U-CNV-BD
Applicable main units		FX3U
Weight	kg	0.01
Dimensions (W x H x D)	mm	19.6 x 46.1 x 53.5

■ Interface Adapters

☑ FX3S ☑ FX3G ☐ FX3GC ☐ FX3U ☐ FX3UC

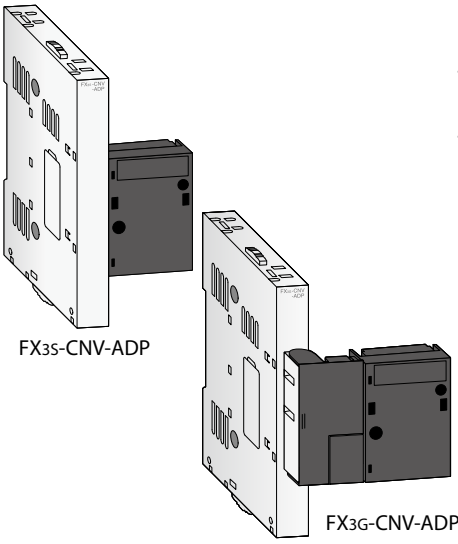

FX3S-CNV-ADP

FX3G-CNV-ADP*

FX3S-CNV-ADP, FX3G-CNV-ADP

The FX3S-CNV-ADP interface adapter allows FX3S main units to connect with the standard FX3S left side adapter bus.

The FX3G-CNV-ADP interface adapter allows FX3G main units to connect with the standard FX3S left side adapter bus.


Specifications		FX3S-CNV-ADP	FX3G-CNV-ADP*
Applicable main units		FX3S	FX3G
Weight	kg	0.1	0.1
Dimensions (W x H x D)	mm	14.6 x 90 x 74	14.6 x 90 x 86

* Production will be discontinued in December 2026.

■ Interface Converter

Production will be discontinued in Sep. 2028.

☐ FX3S ☐ FX3G ☑ FX3GC ☐ FX3U ☑ FX3UC



FX2NC-CNV-IF


FX2NC-CNV-IF

The FX2NC-CNV-IF interface converter allows FX3GC and FX3UC main units to connect with the standard FX3U right side extension bus.


Specifications		FX2NC-CNV-IF
Bus connection		FX3GC and FX3UC bus to FX3U bus
Weight	kg	0.06
Dimensions (W x H x D)	mm	14.6 x 90 x 74

■ Power Supply Units **Production will be discontinued in Sep. 2028.**

☐ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC



FX3U-1PSU-5V

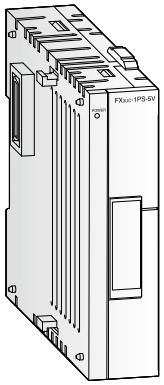

FX3UC-1PS-5V

FX3U-1PSU-5V, FX3UC-1PS-5V


The FX series power supply units are used to add power onto the 5V and 24V extension buses when the built-in service power supplies are not sufficient. The FX3U-1PSU-5V is used with the FX3G/FX3U and the FX3UC-1PS-5V is used with the FX3GC and FX3UC. Up to 2 modules can be added onto one system. The FX3UC-1PS-5V can also be used in place of an FX2NC-CNV-IF as a connection interface to FX3U extension and special function modules.

Note: The FX3U-1PSU-5V can not be used with 24V DC powered main units. Grounding and power cables should be adjusted to exit the unit from the top.

Specifications			FX3U-1PSU-5V	FX3UC-1PS-5V
Applicable main units			FX3G/FX3U (AC power supply type)	FX3GC/FX3UC
Input voltage			100 – 240 V AC	24 V DC +20% -15%
Input frequency			50/60 Hz	—
Inrush current			30 A Max. 5 ms or less/100 V AC 65 A Max. 5 ms or less/200 V AC	30 A Max. 0.5 ms/24 V DC
Power consumption			20 VA Max.	25 W Max.
Output current (Internal for supply)	24 V DC		0.3 A	—
	5 V DC		1 A	1 A
Holding time			10 ms/100 V AC	5 ms
Weight		kg	0.3	0.15
Dimensions (W x H x D)		mm	55 x 90 x 87	24 .2 x 90 x 74

■ Memory Cassettes

☑ FX3S ☑ FX3G ☐ FX3GC ☑ FX3U ☑ FX3UC



FX3U-FLROM-64L*


FX3U-FLROM-16, FX3U-FLROM-64, FX3U-FLROM-64L, and FX3U-FLROM-1M

The FX3U-FLROM-16, FX3U-FLROM-64, FX3U-FLROM-64L and FX3U-FLROM-1M are Flash based memory cassette available for the FX3U and FX3UC main units. The Loader functionality in the FX3U-FLROM-64L allows the memory cassette to upload and download programs to and from the internal memory of the FX3U and FX3UC main units. When the memory cassette is attached to the FX main unit without uploading or downloading, the program on the memory cassette is executed without affecting the program within the internal PLC memory.

Specifications		FX3U-FLROM-16*1	FX3U-FLROM-64*1	FX3U-FLROM-64L*1	FX3U-FLROM-1M*1
Applicable main units		FX3U/FX3UC	FX3U/FX3UC	FX3U/FX3UC	FX3U/FX3UC
Number of steps		16,000	64,000	64,000	64,000 (source 1MB)*2
Memory type		Flash memory	Flash memory	Flash memory	Flash memory
Protect switch		Provided	Provided	Provided	Provided
Data transfer buttons		Not provided	Not provided	Provided	Not Provided
Dimensions (W x H x D)	mm	37 x 20 x 6.1	37 x 20 x 6.1	37 x 20 x 6.1	37 x 20 x 6.1

*1 Production will be discontinued in September 2028.

*2 64000 steps (program capacity) + 1300KB (symbolic information capacity)



FX3G-EEPROM-32L

FX3G-EEPROM-32L


The FX3G-EEPROM-32L is an EEPROM based memory cassette available for the FX3S and FX3G main units. With Loader functionality, the memory cassette can upload and download programs to and from the internal memory of the FX3S and FX3G main units. When the memory cassette is attached to the main unit without uploading or downloading, the program on the memory cassette is executed without affecting the program within the internal PLC memory. The memory cassette can also be placed on top of standard FX3G BD expansion boards, FX3S-CNV-ADP, and FX3G-CNV-ADP.

Specifications		FX3G-EEPROM-32L
Applicable main units		FX3S*/FX3G
Memory type		EEPROM
Number of steps		2,000/4,000/8,000/16,000/32,000
Protect switch		Provided
Data transfer buttons		Provided
Weight	kg	0.02
Dimensions (W x H x D)	mm	35 x 51.2 x 9.6

* The FX3S series PLC can hold 16,000 steps of memory, but user program capacity is limited to 4000 steps.

■ Backup Batteries

☐ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC



FX3U-32BL

FX3U-32BL


Backup batteries provide power to store relevant data within the FX main units and modules when they are not powered. For battery lifetime and battery changing procedures, refer to the relevant product manuals.

Specifications	FX3U-32BL
Applicable units	FX3G/FX3GC/FX3U/FX3UC main units

■ Interface Units

Production will be discontinued in Sep. 2028.

FX-USB-AW




FX-USB-AW Interface converter


Specifications		FX-USB-AW	FX-232AWC-H
Applicable main units		FX3U/FX3UC	FX3S/FX3G/FX3GC/FX3U/FX3UC
Application		USB to RS-422 converter	RS-422 to RS-232C converter
Dimensions (W x H x D)	mm	14 x 20 x 63	25 x 80 x 60

■ Terminal Blocks

Discontinued Production in Sep. 2026.

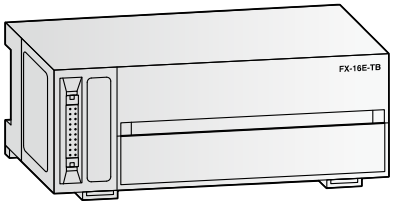

FX-16E-TB/UL

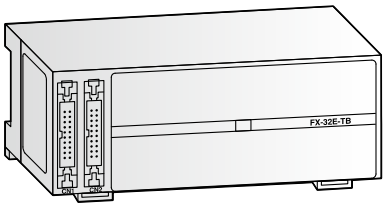

FX-32E-TB/UL

Remote Terminal Blocks

Remote terminal blocks allow I/O modules to be placed at the point of control. The blocks are connected with FX3GC or FX3UC main units and FX-GM controllers using connector-type I/O cabling.


Note: The products listed below may not comply with CE ratings.

Specifications		FX-16E-TB	FX-16E-TB/UL	FX-32E-TB	FX-32E-TB/UL
Number of	inputs	up to 16 inputs or 16 outputs		up to 32 inputs or 32 outputs	
	outputs				
Application		Connects directly to PLC input/output terminals.			
Weight	kg	0.3	0.3	0.3	0.3
Dimensions (W x H x D)	mm	150 x 55 x 45	150 x 55 x 45	150 x 55 x 45	150 x 55 x 45

Specifications		FX-16EYR-TB	FX-16EYR-TB/UL	FX-16EYS-TB	FX-16EYS-TB/UL
Number of	inputs	—	—	—	—
	outputs	16	16	16	16
Application		Relay output type		Triac output type	
Weight	kg	0.3	0.3	0.3	0.3
Dimensions (W x H x D)	mm	150 x 55 x 45	150 x 55 x 45	150 x 55 x 45	150 x 55 x 45

Specifications		FX-16EYT-TB	FX-16EYT-ESS-TB/UL
Number of	inputs	—	—
	outputs	16	16
Application		Sink transistor output type	Source transistor output type
Weight	kg	0.3	0.3
Dimensions (W x H x D)	mm	150 x 55 x 45	150 x 55 x 45

■ Connection Cables



FX-20P-CAB0*1

FX series Connection Cables

The cables listed in the following tables are used for FX series PLC programming, positioning applications, block connections and interface conversion.


Connection cables for peripherals

Specifications		F2-232CAB-1	FX-232CAB-1	FX-422CAB0
Application		PC to FX-232AWC-H	PC to GOT	FX-232AWC-H to FX PLC
Length	m	3.0	3.0	1.5

Connection cables for programming unit

Specifications		FX-20P-CAB0*1
Application		FX-30P to FX PLC
Length	m	1.5

*1 Production will be discontinued in September 2028.

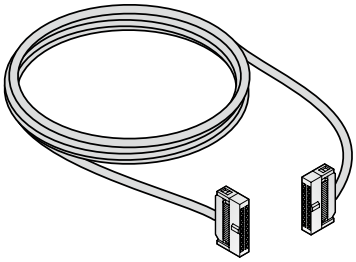

FX-16E-500CAB*2

Connection cables for FX3GC or FX3UC remote terminal blocks


Specifications		FX-16E-500CAB-S	FX-16E-150CAB*2	FX-16E-300CAB*2	FX-16E-500CAB*2	FX-16E-150CAB-R*2	FX-16E-300CAB-R*2	FX-16E-500CAB-R*2
Application		FX3GC/FX3UC to remote FX terminal block						
Length	m	5.0	1.5	3.0	5.0	1.5	3.0	5.0

*2 Discontinued Production in September 2026.

Connection cables for extension bus

Specifications		FX0N-30EC*1	FX0N-65EC*1
Application		PLC bus cable	PLC bus cable
Length	m	0.3	0.65

*1 Production will be discontinued in September 2028.



FX0N-65EC*1


Connection cables for FX3GC or FX3UC main units

Specifications		FX2NC-100MPCB	FX2NC-100BPCB	FX2NC-10BPCB1
Application		24 V DC power cable for main units	24 V DC power cable for extension units	Power crossover cable for input extension blocks
Length	m	1	1	0.1

■ PLC Bus Cable Connector

Production will be discontinued in Sep. 2028.

☐ FX3S ☑ FX3G ☑ FX3GC ☑ FX3U ☑ FX3UC



FX2N-CNV-BC

FX2N-CNV-BC

The FX2N-CNV-BC is used to connect a PLC bus extension cable (FX0N-30EC or FX0N-65EC) to the bus cable of an FX3U extension module or special function module.

Specifications		FX2N-CNV-BC
Application		PLC bus cable to FX3U extension module or special function module
Weight	kg	0.04
Dimensions (W x H x D)	mm	40 x 60.5 x 16.5


MELSOFT – Integrated FA Software

The MELSOFT software family offers efficient software packages designed to reduce programming and setup time. All MELSOFT software provides instant access, direct communication, complete compatibility, and open exchange of data with MELSEC products.

MELSOFT software:

- System management software MELSOFT Navigator for all MELSOFT software
- Configuration software packages for module such as FX Configurator-FP
- GT Works3 for operator terminal programming (refer to the GOT2000 catalog)
- Data access and PC-to-PLC communication setup software MX Component and MX Sheet

■ System Management Software

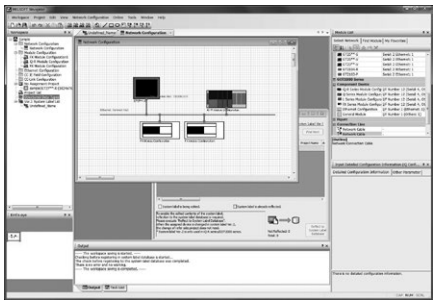


MELSOFT Navigator

MELSOFT Navigator, along with GX Works2 and other MELSOFT software, facilitates system level design and acts as the interface between each software. Useful functions include design of system configuration, parameter batch setting, system labels, and batch read.

Software	MELSOFT Navigator
Series	All FX series
Language	English

■ PLC Programming Software

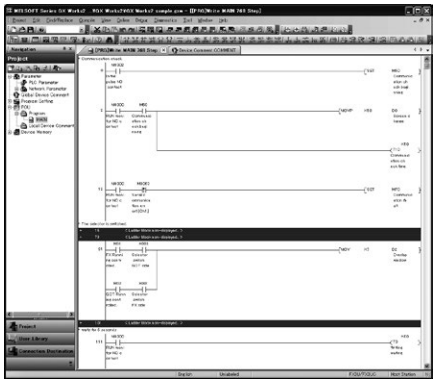


GX Works2

GX Works2 is the standard programming suite for MELSEC PLCs and incorporates the straightforward ladder programming style from GX Developer, as well as the global engineering standard IEC 61131-3.

GX Works2 supports all new functions and modules of MELSEC PLCs while remaining backward compatible to GX Developer, protecting customer assets and programs. The easy to use interface and freedom to choose programming style improves design and debugging efficiency. GX Works2 is part of the iQ Works engineering environment, promoting sharing of information such as system designs and labels between different programming environments for GOTs, motion products and robots.

Software	GX Works2
Series	All MELSEC PLCs
Language	English

■ Data Access and Communication Setup Software

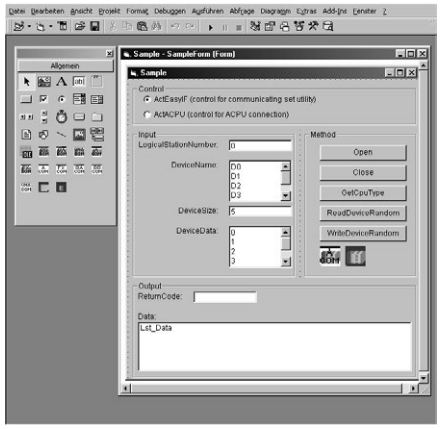

MX Component, MX Sheet

MELSOFT MX Series software provides several middleware applications for PC-to-PLC communication setup and data acquisition and adjustment through dedicated communication channels. With helpful software tools like MX Sheet, third party software packages like Microsoft® Excel® can be used for data monitoring and logging.

Software	MX Series Data Link Description	Model
MX Component	ActiveX® library for communication	SW[]D5C-ACT-E
MX Sheet	Microsoft® Excel® communication support tool	SW[]D5C-SHEET-E

Configuration Software

■ Configuration Software

Production will be discontinued in Sep. 2028.

Software	Configuration Software Description	Model
FX Configurator-FP	FX3U-20SSC-H configuration tool	SW1D5C-FXSSC-E

CERTIFICATIONS

Model Name	CE		UL cUL	KC	Ship approvals						
	EMC	LVD			ABS	DNV	LR	BV	RINA	NK	KR
FX3S Main Units											
FX3S-10MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3S-10MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3S-10MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3S-10MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3S-10MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3S-10MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3S-14MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3S-14MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3S-14MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3S-14MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3S-14MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3S-14MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3S-20MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3S-20MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3S-20MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3S-20MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3S-20MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3S-20MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3S-30MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3S-30MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3S-30MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3S-30MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3S-30MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3S-30MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3S-30MR/ES-2AD	●	●	●	●	●	●	●	●	●	●	●
FX3S-30MT/ES-2AD	●	●	●	●	●	●	●	●	●	●	●
FX3S-30MT/ESS-2AD	●	●	●	●	●	●	●	●	●	●	●
FX3G Main Units											
FX3G-14MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3G-14MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3G-14MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3G-14MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3G-14MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3G-14MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3G-24MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3G-24MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3G-24MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3G-24MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3G-24MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3G-24MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3G-40MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3G-40MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3G-40MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3G-40MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3G-40MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3G-40MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3G-60MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3G-60MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3G-60MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3G-60MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3G-60MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3G-60MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3GC Main Units											
FX3GC-32MT/D	●	○	●	●	—	—	—	—	—	—	—
FX3GC-32MT/DSS	●	○	●	●	—	—	—	—	—	—	—

Model Name	CE		UL cUL	KC	Ship approvals						
	EMC	LVD			ABS	DNV	LR	BV	RINA	NK	KR
FX3U Main Units											
FX3U-16MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3U-16MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-16MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3U-16MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3U-16MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-16MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3U-32MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3U-32MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-32MR/UA1	●	●	●	●	—	—	—	—	—	—	—
FX3U-32MS/ES	●	●	●	●	—	—	—	—	—	—	—
FX3U-32MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3U-32MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3U-32MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-32MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3U-48MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3U-48MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-48MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3U-48MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3U-48MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-48MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3U-64MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3U-64MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-64MR/UA1	●	●	●	●	—	—	—	—	—	—	—
FX3U-64MS/ES	●	●	●	●	—	—	—	—	—	—	—
FX3U-64MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3U-64MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3U-64MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-64MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3U-80MR/DS	●	●	●	●	●	●	●	●	●	●	●
FX3U-80MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-80MT/DS	●	○	●	●	●	●	●	●	●	●	●
FX3U-80MT/DSS	●	○	●	●	●	●	●	●	●	●	●
FX3U-80MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-80MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3U-128MR/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-128MT/ES	●	●	●	●	●	●	●	●	●	●	●
FX3U-128MT/ESS	●	●	●	●	●	●	●	●	●	●	●
FX3UC Main Units											
FX3UC-16MR/D-T	●	●	●	●	—	—	—	—	—	—	—
FX3UC-16MR/DS-T	●	●	●	●	—	—	—	—	—	—	—
FX3UC-16MT/D	●	○	●	●	●	●	●	●	●	—	—
FX3UC-16MT/DSS	●	○	●	●	●	●	●	●	●	—	—
FX3UC-32MT/D	●	○	●	●	●	●	●	●	●	—	—
FX3UC-32MT/DSS	●	○	●	●	●	●	●	●	●	—	—
FX3UC-64MT/D	●	○	●	●	●	●	●	●	●	—	—
FX3UC-64MT/DSS	●	○	●	●	●	●	●	●	●	—	—
FX3UC-96MT/D	●	○	●	●	●	●	●	●	●	—	—
FX3UC-96MT/DSS	●	○	●	●	●	●	●	●	●	—	—

● = comply, ○ = no need to comply

Model Name	CE		UL cUL	KC	Ship approvals						
	EMC	LVD			ABS	DNV	LR	BV	RINA	NK	KR
FX2N Extension Units											
FX2N-32ER-ES/UL	●	●	●	●	●	●	●	●	●	—	●
FX2N-32ET-ESS/UL	●	●	●	●	●	●	●	●	●	—	●
FX2N-48ER-DS	●	●	●	●	●	●	—	—	—	—	●
FX2N-48ER-ES/UL	●	●	●	●	●	●	●	●	●	—	●
FX2N-48ER-UA1/UL	●	●	●	—	●	—	—	—	—	—	●
FX2N-48ET-DSS	●	○	●	●	●	●	—	—	—	—	●
FX2N-48ET-ESS/UL	●	●	●	●	●	●	●	●	●	—	●
FX2N Extension Blocks											
FX2N-8ER-ES/UL	●	●	●	●	—	●	—	—	—	—	—
FX2N-8EX-ES/UL	●	○	●	●	—	●	—	—	—	—	—
FX2N-8EX-UA1/UL	—	—	●	—	—	—	—	—	—	—	—
FX2N-8EYR-ES/UL	●	●	●	●	—	●	—	—	—	—	—
FX2N-8EYT-ESS/UL	●	○	●	●	—	●	—	—	—	—	—
FX2N-16EX-ES/UL	●	○	●	●	●	●	●	●	●	●	●
FX2N-16EYR-ES/UL	●	●	●	●	●	●	●	●	●	●	●
FX2N-16EYT-ESS/UL	●	○	●	●	●	●	●	●	●	●	●
FX2N-16EYS	—	—	●	●	—	—	—	—	—	—	—
FX2NC Extension Blocks											
FX2NC-16EX-DS	●	○	●	●	●	●	●	—	—	—	—
FX2NC-16EX-T-DS	●	○	●	●	●	●	●	—	—	—	—
FX2NC-16EYR-T-DS	●	●	●	●	●	●	●	—	—	—	—
FX2NC-16EYT-DSS	●	○	●	●	●	●	●	—	—	—	—
FX2NC-32EX-DS	●	○	●	●	●	●	●	—	—	—	—
FX2NC-32EYT-DSS	●	○	●	●	●	●	●	—	—	—	—
FX2NC Special Adapters & Special Function Blocks											
FX2NC-CNV-IF	—	—	—	—	—	—	●	—	—	—	—
FX3U Special Function Blocks											
FX3U-1PG	●	○	●	●	—	—	—	—	—	—	—
FX3U-1PSU-5V	●	●	●	●	—	—	—	—	—	—	—
FX3U-2HC	●	○	●	●	—	—	—	—	—	—	—
FX3U-4AD	●	○	●	●	—	—	—	—	—	—	—
FX3U-4DA	●	○	●	●	—	—	—	—	—	—	—
FX3U-4LC	●	○	●	●	—	—	—	—	—	—	—
FX3U-20SSC-H	●	○	●	●	—	—	—	—	—	—	—
FX3U-16CCL-M	●	○	●	●	—	—	—	—	—	—	—
FX3U-64CCL	●	○	●	●	—	—	—	—	—	—	—
FX3U-128ASL-M	●*	○	●	—	—	—	—	—	—	—	—
FX3U Special Adapters											
FX3U-2HSY-ADP	●	○	●	●	●	●	●	●	●	●	●
FX3U-3A-ADP	●	○	●	●	—	—	—	—	—	—	—
FX3U-4AD-ADP	●	○	●	●	●	●	●	●	●	●	●
FX3U-4AD-PNK-ADP	●	○	●	●	—	—	—	—	—	—	—
FX3U-4AD-PT-ADP	●	○	●	●	●	●	●	●	●	●	●
FX3U-4AD-PTW-ADP	●	○	●	●	—	—	—	—	—	—	—
FX3U-4AD-TC-ADP	●	○	●	●	●	●	●	●	●	●	●
FX3U-4DA-ADP	●	○	●	●	●	●	●	●	●	●	●
FX3U-4HSX-ADP	●	○	●	●	●	●	●	●	●	●	●
FX3U-232ADP-MB	●	○	●	●	●	●	●	●	●	●	●
FX3U-485ADP-MB	●	○	●	●	●	●	●	●	●	●	●
FX3G Interface Adapter											
FX3G-CNV-ADP	●	○	●	●	●	●	●	●	●	●	●
FX3S Interface Adapter											
FX3S-CNV-ADP	●	○	●	○	●	●	●	●	●	●	●
FX3UC Special Function Blocks											
FX3UC-1PS-5V	●	○	●	●	●	●	●	●	●	—	—
FX3UC-4AD	●	○	●	●	—	—	—	—	—	—	—

Model Name	CE		UL cUL	KC	Ship approvals						
	EMC	LVD			ABS	DNV	LR	BV	RINA	NK	KR
Expansion Boards											
FX3G-1DA-BD	●	○	—	●	●	●	●	●	●	●	●
FX3G-2AD-BD	●	○	—	●	●	●	●	●	●	●	●
FX3G-4EX-BD	●	○	—	●	—	—	—	—	—	—	—
FX3G-2EYT-BD	●	○	—	●	—	—	—	—	—	—	—
FX3G-8AV-BD	●	○	—	●	—	—	—	—	—	—	—
FX3G-232-BD	●	○	—	●	●	●	●	●	●	●	—
FX3G-422-BD	●	○	—	●	●	●	●	●	●	●	—
FX3G-485-BD	●	○	—	●	●	●	●	●	●	●	—
FX3U-8AV-BD	●	○	—	●	—	—	—	—	—	—	—
FX3U-232-BD	●	○	—	●	●	●	●	●	●	●	●
FX3U-422-BD	●	○	—	●	●	●	●	●	●	●	●
FX3U-485-BD	●	○	—	●	●	●	●	●	●	●	●
FX3G-485-BD-RJ	●	○	—	●	—	—	—	—	—	—	—
FX3U-CNV-BD	●	○	—	○	●	●	●	●	●	●	●
FX3U-USB-BD	●	○	—	●	●	●	●	●	●	●	●
Accessories											
FX-232AWC-H	●	○	—	●	—	—	—	—	—	—	—
FX-USB-AW	●	○	—	●	—	—	—	—	—	—	—
FX2N-CNV-BC	●	○	—	○	—	—	—	—	—	—	—
Memory Cassettes											
FX3G-EEPROM-32L	●	○	—	○	●	●	●	●	●	●	—
FX3U-FLROM-16	●	○	—	○	●	●	●	●	●	●	●
FX3U-FLROM-64	●	○	—	○	●	●	●	●	●	●	●
FX3U-FLROM-64L	●	○	—	○	●	●	●	●	●	●	●
FX3U-FLROM-1M	●	○	—	○	—	—	—	—	—	—	—

∗: Zone A
● = comply, ○ = no need to comply

INDEX

FX-16E-TB..... 29, 31, 68
FX-16E-TB/UL..... 29, 31, 68
FX-16EYR-ES-TB/UL 29, 31
FX-16EYR-TB 29, 31, 68
FX-16EYR-TB/UL 68
FX-16EYS-ES-TB/UL..... 29, 31
FX-16EYS-TB..... 29, 31, 68
FX-16EYS-TB/UL..... 68
FX-16EYT-ESS-TB/UL .. 29, 31, 68
FX-16EYT-TB..... 29, 31, 68
FX-232AWC-H 28, 30, 32, 68, 69, 73
FX-32E-TB 29, 31
FX-32E-TB/UL..... 29, 31, 68
FX-32E-TB 68
FX-USB-AW..... 28, 68, 73

FX2N-16EX-ES/UL..... 29, 31, 51, 73
FX2N-16EYR-ES/UL..... 29, 31, 51, 73
FX2N-16EYS..... 29, 31, 51, 73
FX2N-16EYT-ESS/UL 29, 31, 51, 73
FX2N-32ER-ES/UL..... 29, 31, 49, 73
FX2N-32ET-ESS/UL..... 29, 31, 49, 73
FX2N-48ER-DS 29, 31
FX2N-48ER-DS 49, 73
FX2N-48ER-ES/UL..... 29, 31, 49, 73
FX2N-48ER-UA1/UL 29, 31, 49, 73
FX2N-48ET-DSS..... 29, 31, 49, 73
FX2N-48ET-ESS/UL..... 29, 31, 49, 73
FX2N-8ER-ES/UL..... 29, 31, 50, 73
FX2N-8EX-ES/UL 29, 31, 50, 73
FX2N-8EX-UA1/UL..... 29, 31, 50, 73
FX2N-8EYR-ES/UL..... 29, 31, 50, 73
FX2N-8EYT-ESS/UL..... 29, 31, 50, 73
FX2N-CNV-BC..... 29, 31, 69, 73

FX2NC-16EX-DS..... 29, 31, 52, 73
FX2NC-16EX-T-DS..... 29, 31, 52, 73
FX2NC-16EYR-T-DS..... 29, 31, 52, 73
FX2NC-16EYT-DSS 29, 31, 52, 73
FX2NC-32EX-DS..... 29, 31, 52, 73
FX2NC-32EYT-DSS 29, 31, 52, 73
FX2NC-CNV-IF..... 29, 31, 65, 73

FX3G-14MR/DS..... 30, 43, 72
FX3G-14MR/ES 30, 43, 72
FX3G-14MT/DS..... 30, 43, 72
FX3G-14MT/DSS 30, 43, 72
FX3G-14MT/ES..... 30, 43, 72
FX3G-14MT/ESS 30, 43, 72
FX3G-1DA-BD 30, 32, 54, 73
FX3G-8AV-BD..... 30, 32
FX3G-24MR/DS..... 30, 43, 72
FX3G-24MR/ES 30, 43, 72
FX3G-24MT/DS..... 30, 43, 72
FX3G-24MT/DSS 30, 43, 72
FX3G-24MT/ES..... 30, 43, 72
FX3G-24MT/ESS 30, 43, 72
FX3G-232-BD..... 30, 32, 62, 73
FX3G-2AD-BD 30, 32, 53, 73
FX3G-2EYT-BD 30, 32, 48, 73
FX3G-40MR/DS..... 30, 43, 72
FX3G-40MR/ES 30, 43, 72
FX3G-40MT/DS..... 30, 43, 72
FX3G-40MT/DSS 30, 43, 72
FX3G-40MT/ES..... 30, 43, 72
FX3G-40MT/ESS 30, 43, 72
FX3G-422-BD 30, 32, 62, 73
FX3G-485-BD 30, 32, 62, 73
FX3G-485-BD-RJ..... 30, 32, 62, 73
FX3G-4EX-BD 30, 32, 48, 73
FX3G-60MR/DS..... 30, 43, 72
FX3G-60MR/ES 30, 43, 72
FX3G-60MT/DS..... 30, 43, 72
FX3G-60MT/DSS 30, 43, 72
FX3G-60MT/ES..... 30, 43, 72
FX3G-60MT/ESS 30, 43, 72
FX3G-8AV-BD..... 53, 73
FX3G-CNV-ADP 30, 65, 73
FX3G-EEPROM-32L..... 31, 33, 67, 73

FX3GC-32MT/D 30, 44, 72
FX3GC-32MT/DSS 30, 44, 72

FX3S-10MR/DS 33, 44, 72
FX3S-10MR/ES..... 33, 44, 72
FX3S-10MT/DS 33, 44, 72
FX3S-10MT/DSS..... 33, 44, 72
FX3S-10MT/ES..... 33, 44, 72
FX3S-10MT/ESS..... 33, 44, 72
FX3S-14MR/DS..... 33, 44, 72
FX3S-14MR/ES..... 33, 44, 72
FX3S-14MT/DS 33, 44, 72
FX3S-14MT/DSS..... 33, 44, 72
FX3S-14MT/ES..... 33, 44, 72
FX3S-14MT/ESS..... 33, 44, 72
FX3S-20MR/DS..... 33, 44, 72
FX3S-20MR/ES..... 33, 44, 72
FX3S-20MT/DS..... 33, 44, 72
FX3S-20MT/DSS..... 33, 44, 72
FX3S-20MT/ES..... 33, 44, 72
FX3S-20MT/ESS..... 33, 44, 72
FX3S-30MR/DS..... 33, 45, 72
FX3S-30MR/ES..... 33, 45, 72
FX3S-30MR/ES-2AD..... 33, 45, 72
FX3S-30MT/DS..... 33, 45, 72
FX3S-30MT/DSS..... 33, 45, 72
FX3S-30MT/ES..... 33, 45, 72
FX3S-30MT/ES-2AD..... 33, 45, 72
FX3S-30MT/ESS..... 33, 45, 72
FX3S-30MT/ESS-2AD... 33, 45, 72
FX3S-CNV-ADP..... 32, 65, 73

FX3U-128ASL-M..... 29, 31, 64, 73
FX3U-128MR/ES..... 28, 42, 72
FX3U-128MT/ES..... 28, 42, 72
FX3U-128MT/ESS..... 28, 42, 72
FX3U-16CCL-M..... 29, 31, 64, 73
FX3U-16MR/DS..... 28, 41, 72
FX3U-16MR/ES..... 28, 41, 72
FX3U-16MT/DS..... 28, 41, 72
FX3U-16MT/DSS 28, 41, 72
FX3U-16MT/ES..... 28, 41, 72
FX3U-16MT/ESS 28, 41, 72
FX3U-1PG..... 29, 61, 73
FX3U-1PSU-5V 29, 31, 66, 73
FX3U-20SSC-H 17
FX3U-20SSC-H 29, 60, 73
FX3U-232ADP-MB 28, 30, 32, 63, 73
FX3U-232-BD..... 28, 62, 73
FX3U-2HC..... 29, 59, 73
FX3U-2HSY-ADP 28, 60, 73
FX3U-32BL 29, 31, 67
FX3U-32MR/DS..... 28, 41, 72
FX3U-32MR/ES 28, 41, 72
FX3U-32MR/UA1..... 28, 41, 72
FX3U-32MS/ES..... 28, 41, 72
FX3U-32MT/DS..... 28, 41, 72
FX3U-32MT/DSS 28, 41, 72
FX3U-32MT/ES..... 28, 41, 72
FX3U-32MT/ESS 28, 41, 72
FX3U-3A-ADP..... 28, 30, 32, 56, 73
FX3U-422-BD..... 28, 62, 73
FX3U-485ADP-MB 28, 30, 32, 63, 73
FX3U-485-BD..... 28, 62, 73
FX3U-48MR/DS..... 28, 41, 72
FX3U-48MR/ES 28, 41, 72
FX3U-48MT/DS..... 28, 41, 72
FX3U-48MT/DSS 28, 41, 72
FX3U-48MT/ES..... 28, 41, 72
FX3U-48MT/ESS 28, 41, 72
FX3U-4AD 29, 31, 54, 73
FX3U-4AD-ADP 28, 30, 32, 53, 73
FX3U-4AD-PNK-ADP.... 28, 30, 32, 57, 73
FX3U-4AD-PT-ADP..... 28, 30, 32, 57, 73
FX3U-4AD-PTW-ADP... 28, 30, 32, 57, 73
FX3U-4AD-TC-ADP..... 28, 30, 32, 57, 73
FX3U-4DA 29, 31, 55, 73
FX3U-4DA-ADP 28, 30, 32, 55, 73
FX3U-4HSX-ADP 28, 59, 73
FX3U-4LC..... 29, 31, 58, 73
FX3U-64CCL 29, 31, 64, 73
FX3U-64MR/DS..... 28, 41, 72
FX3U-64MR/ES 28, 41, 72
FX3U-64MR/UA1..... 28, 41, 72
FX3U-64MS/ES..... 28, 41, 72
FX3U-64MT/DS..... 28, 41, 72
FX3U-64MT/DSS 28, 41, 72
FX3U-64MT/ES..... 28, 41, 72
FX3U-64MT/ESS 28, 41, 72
FX3U-80MR/DS..... 28, 42, 72
FX3U-80MR/ES 28, 42, 72
FX3U-80MT/DS..... 28, 42, 72
FX3U-80MT/DSS 28, 42, 72
FX3U-80MT/ES..... 28, 42, 72
FX3U-80MT/ESS 28, 42, 72
FX3U-8AV-BD..... 28, 53, 73
FX3U-CNV-BD 28, 65, 73
FX3U-FLROM-16..... 28, 29, 67, 73
FX3U-FLROM-1M 28, 29, 67, 73
FX3U-FLROM-64 ..... 28, 29, 67, 73
FX3U-FLROM-64L 28, 29, 67, 73
FX3U-USB-BD..... 28, 62, 73

FX3UC-16MR/DS-T..... 28, 42, 72
FX3UC-16MR/D-T..... 28, 42, 72
FX3UC-16MT/D..... 28, 42, 72
FX3UC-16MT/DSS 28, 42, 72
FX3UC-1PS-5V 29, 31, 66, 73
FX3UC-32MT/D..... 28, 42, 72
FX3UC-32MT/DSS 28, 42, 72
FX3UC-4AD 29, 31, 54, 73
FX3UC-64MT/D..... 28, 42, 72
FX3UC-64MT/DSS 28, 42, 72
FX3UC-96MT/D..... 28, 42, 72
FX3UC-96MT/DSS 28, 42, 72

About this product catalog

Due to the constantly growing product range and new or changed product features, the information in this catalog may be updated without notice. Please contact your Mitsubishi Electric product provider for more details.

Texts, figures and diagrams shown in this product catalog are intended exclusively for explanation and assistance in planning and ordering the FX3S, FX3G, FX3GC, FX3U, and FX3UC series programmable logic controllers (PLCs) and the associated accessories. Only the manuals supplied with the units are relevant for installation, commissioning and handling of the units and the accessories. The information given in the manuals must be read before installation and commissioning of the units or software.

If any questions arise regarding the application or use of the PLC units and accessories described in this catalog, please contact your Mitsubishi Electric product provider.

This catalog confers no industrial property rights or any rights of any other kind, nor does it confer any patent licenses. Mitsubishi Electric Corporation cannot be held responsible for any problems involving industrial property rights which may occur as a result of using the contents noted in this catalog.

©2017 MITSUBISHI ELECTRIC CORPORATION

- Anywire and AnyWireASLINK are either registered trademarks or trademarks of Anywire Corporation.
- CiA and CANopen are registered EU trademarks of CiA e. V.
- Microsoft, Access, ActiveX, Azure, Bing, Microsoft Edge, Excel, HoloLens, Internet Explorer, SQL Server, Silverlight, Surface, Visual Basic, Visual C#, Visual C++, Visual Studio, Windows, Windows Phone, and Windows Server, Windows Vista are trademarks of the Microsoft group of companies.
- All other company names and product names mentioned herein are trademarks or registered trademarks of their respective owners.
- Trademark symbols such as "™" and "®" might be omitted in this document.

Automating the World

Creating Solutions Together.





Industrial Computer



Controllers



Computerized Numerical Controllers



Drive Products



Human Machine Interfaces



Robots



Low-voltage Power Distribution Products



Medium-voltage Power Distribution Products



Energy Saving Supporting Devices



Processing Machines: EDM, Lasers



Engineering and Solution Software

Mitsubishi Electric's FA division provides robust support for our customers' manufacturing needs. We offer a vast array of FA products, including industry-leading PLCs, control devices, drive devices, energy efficiency support equipment, power distribution control equipment, and industrial mechatronics. Our presence on every type of production floor enables us to assist in labor-saving initiatives and quality improvements, helping customers achieve sustainable manufacturing. We also address challenges such as decarbonization and labor shortages through the utilization of automation technology.

Additionally, by leveraging synergies among FA technologies, manufacturing expertise, and digital innovations, we aim to streamline the construction of systems for data collection, accumulation, and analysis. This contributes to reducing manufacturing and quality losses.

We enable flexible manufacturing processes that respect legacy systems while embracing innovations to drive optimization. As your solution partner, Mitsubishi Electric FA delivers high-performance, high-quality products that enhance your competitiveness.

Let's automate the world together!

Note: not all products are available in all countries

MITSUBISHI ELECTRIC CORPORATION
HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
www.MitsubishiElectric.com

L(NA)08490ENG-F 2610(MEE)

Printed Oct. 2026

All trademarks acknowledged.